



信昌電子陶瓷股份有限公司
Prosperity Dielectrics Co., Ltd.

No.220-1, Sec. 2, Nanshan Rd., Lujhu, Taoyuan 33860, Taiwan, R.O.C.
Tel. : 886-3-3224471 Fax : 886-3-3212216

Messrs. : 一般共用

Date : _____

APPROVAL SHEET

Product Name : General Purpose Multilayer Ceramic Chip Capacitors

Part No. : FN Series

Description : Size 0201~2225, C0G/X7R/X5R/Y5V, U_R ≤50V

PREPARED BY	APPROVED BY

信昌電子陶瓷股份有限公司

PROSPERITY DIELECTRICS CO., LTD.

桃園縣蘆竹鄉南山路二段 220-1 號 <http://www.pdc.com.tw>

Tel: 03-322-4471 ext:

Fax: 03-322-5231 / 03-321-2215

Contact: _____ Mobile: _____





信昌電子陶瓷股份有限公司
Prosperity Dielectrics Co., Ltd.

No.220-1, Sec. 2, Nanshan Rd., Lujhu, Taoyuan 33860, Taiwan, R.O.C.
Tel. : 886-3-3224471 Fax : 886-3-3212216

SPECIFICATION

FOR

Product Name : General Purpose Multilayer Ceramic Chip Capacitors

Part No. : FN Series

Description : Size 0201~2225, C0G/X7R/X5R/Y5V, U_R ≤50V

SPEC. No. : <u>FN-000-001-05</u>
DATE :

DRAWN BY	CHECEKED BY	APPROVED BY
Yvens Chou	Yvens Chou	Ryan Chen



1. INTRODUCTION

POSPERITY Multilayer Ceramic Chip Capacitors supplied in bulk or tape & reel package are ideally suitable for thick-film hybrid circuits and automatic surface mounting on any printed circuit boards.

The nickel-barrier terminations are consisted of a nickel barrier layer over the silver metallization and then finished by electroplated solder layer to ensure the terminations have good solderability. The nickel barrier layer in terminations prevents the dissolution of termination when extended immersion in molten solder at elevated solder temperature.

2. FEATURES

- a. A wide selection of sizes is available (0201 to 2225).
- b. High capacitance in given case size.
- c. Capacitor with lead-free termination (pure Tin).
- d. RoHS & HALOGEN compliant.

3. APPLICATIONS

- a. For general digital circuit.
- b. For power supply bypass capacitors.
- c. For consumer electronics.
- d. DC to DC converter.

4. HOW TO ORDER

<u>FN</u>	<u>21</u>	<u>X</u>	<u>471</u>	<u>K</u>	<u>500</u>	<u>P</u>	<u>X</u>	<u>G</u>
PDC Family	Size	Dielectric	Capacitance	Tolerance	Rated Voltage	Packaging	Thickness	Control Code
Table 1	Table 2	Table 3	Table 4	Table 5	Table 6	Table 7	Table 8	Table 9

Table 1	PDC Family
Code	Description
FN	General Purpose product ≤50Vdc

Table 2	General Purpose				
Code	Description	Code	Description	Code	Description
03	0201 (0603)	31	1206 (3216)	46	1825 (4563)
15	0402 (1005)	32	1210 (3225)	52	2211 (5728)
18	0603 (1608)	42	1808 (4520)	55	2220 (5750)
21	0805 (2012)	43	1812 (4532)	56	2225 (5763)

Table 3	Dielectric Material Characteristics		
Code	Description	Code	Description
N	C0G	X	X7R
B	X5R	F	Y5V

Table 4	Capacitance Rule Code		
Code	Description	Code	Description
R47	0.47pF	102	102=10x10 ² =1000pF
0R5	0.5pF	104	104=10x10 ⁴ =100nF
100	100=10x10 ⁰ =10pF	106	106=10x10 ⁶ =10μF

Table 5	Tolerance				
Code	Description	Code	Description	Code	Description
A	±0.05 pF	H	±3 %	N	-5% ~ +10%
B	±0.10 pF	I	-10% ~ 0%	P	±0.02 pF
C	±0.25 pF	J	±5 %	Q	±0.03 pF
D	±0.50 pF	K	±10 %	Z	-20% ~ +80%
F	±1 %	L	0% ~ +10%	X	+10% ~ +20%
G	±2 %	M	±20 %		

Table 6	Rated Voltage				
Code	Description	Code	Description	Code	Description
6R3	6.3VDC	201	200VDC	152	1500VDC
100	10VDC	251	250VDC	202	2000VDC
160	16VDC	401	400VDC	302	3000VDC
250	25VDC	501	500VDC	402	4000VDC
500	50VDC	631	630VDC	502	5000VDC
101	100VDC	102	1000VDC	602	6000VDC

Table 7	Packaging Type		
Code	Description	Code	Description
B	Bulk	T	Tray package
E	Tape and 7" Reel, Embossed Tape	P	Tape and 7" Reel, Paper Tape
K	Tape and 10" Reel, Embossed Tape	D	Tape and 10" Reel, Paper Tape
L	Tape and 13" Reel, Embossed Tape	G	Tape and 13" Reel, Paper Tape

Table 8	Thickness Description				
Code	Description	Code	Description	Code	Description
A	0.60 ± 0.10 mm	I	1.25 ± 0.20 mm	Q	0.50 +0.02/-0.05 mm
B	0.8 + 0.15/-0.10 mm	J	1.15 ± 0.15 mm	R	3.10 ± 0.30 mm
C	1.25 ± 0.10 mm	K	0.50 ± 0.20 mm	S	0.80 ± 0.07 mm
D	1.40 ± 0.15 mm	L	0.30 ± 0.03 mm	T	0.85 ± 0.10 mm
E	1.60 ± 0.20 mm	M	0.95 ± 0.10 mm	U	0.50 ± 0.10 mm
F	2.00 ± 0.20 mm	N	0.50 ± 0.05 mm	V	0.20 ± 0.02 mm
G	2.50 ± 0.30 mm	O	3.50 ± 0.20 mm	X	0.80 ± 0.10 mm
H	2.80 ± 0.30 mm	P	1.60 +0.3/-0.10 mm	Z	0.25 ± 0.03 mm

Table 9	Special Control Code
Code	Description
G	RoHS Compliant

5. EXTERNAL DIMENSIONS

Size Inch (mm)	L (mm)	W (mm)	Code / T (mm)	M _B (mm)
0201(0603)	0.60±0.03	0.30±0.03	See No.4 Reference Table 8	0.15±0.05
0402(1005)	1.00±0.10	0.50±0.10		0.25 +0.05/-0.10
0603(1608)	1.60±0.15	0.80±0.15		0.40±0.15
0805(2012)	2.00±0.20	1.25±0.20		0.50±0.20
1206(3216)	3.20±0.20	1.60±0.20		0.60±0.20
1210(3225)	3.20±0.30	2.50±0.30		0.75±0.35
1812(4532)	4.50±0.40	3.20±0.30		0.75±0.35
1825(4563)	4.50±0.40	6.30±0.40		0.75±0.35
2220(5750)	5.70±0.40	5.00±0.40		0.85±0.35
2225(5763)	5.70±0.40	6.30±0.40		0.85±0.35

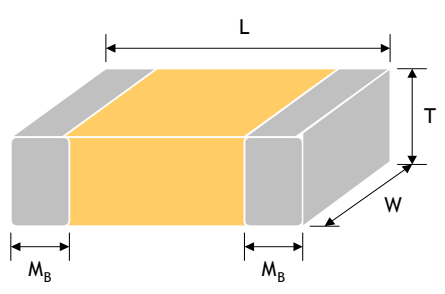


Fig. 5.1 The outline of MLCC

6. GENERAL ELECTRICAL DATA

Dielectric	C0G	X7R	X5R	Y5V
Size	0201, 0402, 0603, 0805, 1206, 1210, 1808, 1812, 1825, 2220, 2225	0201, 0402, 0603, 0805, 1206, 1210, 1808, 1812, 1825, 2220, 2225	0201, 0402, 0603	0201, 0402, 0603, 0805, 1206, 1210, 1812
Rated voltage (WVDC)	10V, 16V, 25V, 50V	6.3V, 10V, 16V, 25V, 50V	4V, 6.3V, 10V, 16V, 25V, 50V	6.3V, 10V, 16V, 25V, 50V
Capacitance range*	0R1 to 390nF	100pF to 820nF	100pF to 820nF	10nF to 680nF
Capacitance tolerance	J(±5%), K(±10%)	J(±5%), K(±10%), M(±20%)		Z(-20/+80%)
Tan δ	Cap.<30pF : Q≥400+20C Cap.≥30pF : Q≥1000	Note 1		
Operating temperature	-55 to +125°C		-55 to +85°C	-25 to +85°C
Capacitance characteristic	±30ppm/°C	±15%		+30/-80%
Termination	Cu(or Ag)/Ni/Sn (lead-free termination)			

* Measured at the condition of 30~70% related humidity.

C0G : Apply 1.0±0.2Vrms, 1.0MHz±10% for Cap.≤1000pF and 1.0±0.2Vrms, 1.0KHz±10% for Cap.>1000pF, 25°C at ambient temperature.

X7R : Apply 1.0±0.2Vrms, 1.0KHz±10%, at 25°C ambient temperature.

Y5V : Apply 1.0±0.2Vrms, 1.0KHz±10%, at 20°C ambient temperature.

** Preconditioning for Class II MLCC : Perform a heat treatment at 150±10°C for 1 hour, then leave in ambient condition for 24±2 hours before measurement.

Note 1 : X7R/X5R

Rated	D.F.≤	Exception of D.F.≤	
50V	≤2.5%	≤3%	0201(50V), 0603≥0.047μF, 0805≥0.18μF, 1206≥0.47μF
		≤5%	0201≥0.01μF, 1210≥4.7μF
		≤10%	0402≥0.1μF, 0603>0.1μF, 0805≥1μF, 1206≥2.2μF, 1210≥10μF
35V	≤3.5%	≤10%	0603≥1μF, 0805≥2.2μF, 1206≥2.2μF, 1210≥10μF
		≤5%	0201≥0.01μF, 0805≥1μF, 1210≥10μF
25V	≤3.5%	≤7%	0603≥0.33μF, 1206≥4.7μF
		≤10%	0201≥0.1μF, 0402≥0.10μF, 0603≥0.47μF, 0805≥2.2μF, 1206≥6.8μF, 1210≥22μF
		≤12.5%	0402≥0.47μF
		≤5%	0201≥0.01μF, 0402≥0.033μF, 0603≥0.15μF, 0805≥0.68μF, 1206≥2.2μF, 1210≥4.7μF
16V	≤3.5%	≤10%	0201≥0.1μF(0201/X7R≥0.022μF), 0402≥0.22μF, 0603≥0.68μF, 0805≥2.2μF, 1206≥4.7μF, 1210≥22μF
		≤15%	0201≥0.1μF, 0402≥1μF
10V	≤5%	≤10%	0201≥0.012μF, 0402≥0.33μF(0402/X7R≥0.22μF), 0603≥0.33μF, 0805≥2.2μF, 1206≥2.2μF, 1210≥22μF
		≤15%	0201≥0.1μF, 0402≥1μF
6.3V	≤10%	≤15%	0201≥0.1μF, 0402≥1μF, 0603≥10μF, 0805≥4.7μF, 1206≥47μF, 1210≥100μF
		≤20%	0402≥2.2μF
4V	≤15%	---	---

Y5V

Rated	D.F.≤	Exception of D.F.≤	
≥50V	≤5%	≤7%	0603≥0.1μF, 0805≥0.47μF, 1206≥4.7μF
		≤12.5%	1210≥6.8μF
35V	≤7%	---	---
25V	≤5%	≤7%	0402≥0.047μF, 0603≥0.1μF, 0805≥0.33μF, 1206≥1μF, 1210≥4.7μF
		≤9%	0402≥0.068μF, 0603≥0.47μF, 1206≥4.7μF, 1210≥22μF
16V (C<1.0μF)	≤7%	≤9%	0402≥0.068μF, 0603≥0.68μF
		≤12.5%	0402≥0.22μF
16V (C≥1.0μF)	≤9%	≤12.5%	0603≥2.2μF, 0805≥3.3μF, 1206≥10μF, 1210≥22μF, 1812≥47μF
		≤20%	0402≥0.47μF
10V	≤12.5%	≤20%	0402≥0.47μF
6.3V	≤20%	---	---

7. CAPACITANCE RANGE

7-1. C0G

Cap(pF)	EIA Size Code	0201				0402				0603				0805				1206				
		10V	16V	25V	50V	10V	16V	25V	50V	10V	16V	25V	50V	10V	16V	25V	50V	10V	16V	25V	50V	
0.1	0R1	L	L	L	L	N	N	N	N													
0.2	0R2	L	L	L	L	N	N	N	N													
0.3	0R3	L	L	L	L	N	N	N	N	S	S	S	S									
0.4	0R4	L	L	L	L	N	N	N	N	S	S	S	S									
0.5	0R5	L	L	L	L	N	N	N	N	S	S	S	S	A	A	A	A					
1.0	1R0	L	L	L	L	N	N	N	N	S	S	S	S	A	A	A	A					X
1.2	1R2	L	L	L	L	N	N	N	N	S	S	S	S	A	A	A	A	X	X	X	X	X
1.5	1R5	L	L	L	L	N	N	N	N	S	S	S	S	A	A	A	A	X	X	X	X	X
1.8	1R8	L	L	L	L	N	N	N	N	S	S	S	S	A	A	A	A	X	X	X	X	X
2.2	2R2	L	L	L	L	N	N	N	N	S	S	S	S	A	A	A	A	X	X	X	X	X
2.7	2R7	L	L	L	L	N	N	N	N	S	S	S	S	A	A	A	A	X	X	X	X	X
3.3	3R3	L	L	L	L	N	N	N	N	S	S	S	S	A	A	A	A	X	X	X	X	X
3.9	3R9	L	L	L	L	N	N	N	N	S	S	S	S	A	A	A	A	X	X	X	X	X
4.7	4R7	L	L	L	L	N	N	N	N	S	S	S	S	A	A	A	A	X	X	X	X	X
5.6	5R6	L	L	L	L	N	N	N	N	S	S	S	S	A	A	A	A	X	X	X	X	X
6.8	6R8	L	L	L	L	N	N	N	N	S	S	S	S	A	A	A	A	X	X	X	X	X
8.2	8R2	L	L	L	L	N	N	N	N	S	S	S	S	A	A	A	A	X	X	X	X	X
10	100	L	L	L	L	N	N	N	N	S	S	S	S	A	A	A	A	X	X	X	X	X
12	120	L	L	L	L	N	N	N	N	S	S	S	S	A	A	A	A	X	X	X	X	X
15	150	L	L	L	L	N	N	N	N	S	S	S	S	A	A	A	A	X	X	X	X	X
18	180	L	L	L	L	N	N	N	N	S	S	S	S	A	A	A	A	X	X	X	X	X
22	220	L	L	L	L	N	N	N	N	S	S	S	S	A	A	A	A	X	X	X	X	X
27	270	L	L	L	L	N	N	N	N	S	S	S	S	A	A	A	A	X	X	X	X	X
33	330	L	L	L	L	N	N	N	N	S	S	S	S	A	A	A	A	X	X	X	X	X
39	390	L	L	L	L	N	N	N	N	S	S	S	S	A	A	A	A	X	X	X	X	X
47	470	L	L	L	L	N	N	N	N	S	S	S	S	A	A	A	A	X	X	X	X	X
56	560	L	L	L	L	N	N	N	N	S	S	S	S	A	A	A	A	X	X	X	X	X
68	680	L	L	L	L	N	N	N	N	S	S	S	S	A	A	A	A	X	X	X	X	X
82	820	L	L	L	L	N	N	N	N	S	S	S	S	A	A	A	A	X	X	X	X	X
100	101	L	L	L	L	N	N	N	N	S	S	S	S	A	A	A	A	X	X	X	X	X
120	121	L	L	L	L	N	N	N	N	S	S	S	S	A	A	A	A	X	X	X	X	X
150	151			L	L	N	N	N	N	S	S	S	S	A	A	A	A	X	X	X	X	X
180	181					N	N	N	N	S	S	S	S	A	A	A	A	X	X	X	X	X
220	221					N	N	N	N	S	S	S	S	A	A	A	A	X	X	X	X	X
270	271			L		N	N	N	N	S	S	S	S	A	A	A	A	X	X	X	X	X
330	331			L		N	N	N	N	S	S	S	S	A	A	A	A	X	X	X	X	X
390	391			L		N	N	N	N	S	S	S	S	X	X	X	X	X	X	X	X	X
470	471			L		N	N	N	N	S	S	S	S	X	X	X	X	X	X	X	X	X
560	561			L		N	N	N	N	S	S	S	S	X	X	X	X	X	X	X	X	X
680	681					N	N	N	N	S	S	S	S	X	X	X	X	X	X	X	X	X
820	821					N	N	N	N	S	S	S	S	X	X	X	X	X	X	X	X	X
1000	102					N	N	N	N	S	S	S	S	X	X	X	X	X	X	X	X	X
1200	122									B	B	B	B	X	X	X	X	X	X	X	X	X
1500	152									B	B	B	B	X	X	X	X	X	X	X	X	X
1800	182									B	B	B	B	X	X	X	X	X	X	X	X	X
2200	222									B	B	B	B	X	X	X	X	X	X	X	X	X
2700	272									B	B	B	B	C	C	C	C	C	X	X	X	X
3300	332									B	B	B	B	C	C	C	C	C	X	X	X	X
3900	392									B	B	B	B	C	C	C	C	C	X	X	X	X
4700	472									B	B	B	B	C	C	C	C	C	X	X	X	X
5600	562									B	B	B	B	C	C	C	C	C	X	X	X	X
6800	682									B	B	B	B	C	C	C	C	C	M	M	M	M
8200	822									B	B	B	B	C	C	C	C	C	C	C	C	C
10000	103									B	B	B	B	C	C	C	C	C	C	C	C	C
12000	123													T	T	T	T	P	P	P	P	P
15000	153													T	T	T	T	P	P	P	P	P
18000	183													C	C	C	C	P	P	P	P	P
22000	223													C	C	C	C	P	P	P	P	P
27000	273																	P	P	P	P	P
33000	333																	P	P	P	P	P
39000	393																	P	P	P	P	P
47000	473																	J	J	J	J	J
56000	563																	J	J	J	J	J
68000	683																	E	E	E	E	E
82000	823																	E	E	E	E	E
100000	104																	E	E	E	E	E

7. CAPACITANCE RANGE(Con.)

7-1. C0G

Cap(pF)	EIA Size Code	1210				1808		1812				1825		2220		2225	
		10V	16V	25V	50V	25V	50V	10V	16V	25V	50V	25V	50V	25V	50V	25V	50V
2.2	2R2					C	C										
2.7	2R7					C	C										
3.3	3R3					C	C										
3.9	3R9					C	C										
4.7	4R7					C	C										
5.6	5R6					C	C										
6.8	6R8					C	C										
8.2	8R2					C	C										
10	100	M	M	M	M	C	C	C	C	C	C	E	E	E	E	E	E
12	120	M	M	M	M	C	C	C	C	C	C	E	E	E	E	E	E
15	150	M	M	M	M	C	C	C	C	C	C	E	E	E	E	E	E
18	180	M	M	M	M	C	C	C	C	C	C	E	E	E	E	E	E
22	220	M	M	M	M	C	C	C	C	C	C	E	E	E	E	E	E
27	270	M	M	M	M	C	C	C	C	C	C	E	E	E	E	E	E
33	330	M	M	M	M	C	C	C	C	C	C	E	E	E	E	E	E
39	390	M	M	M	M	C	C	C	C	C	C	E	E	E	E	E	E
47	470	M	M	M	M	C	C	C	C	C	C	E	E	E	E	E	E
56	560	M	M	M	M	C	C	C	C	C	C	E	E	E	E	E	E
68	680	M	M	M	M	C	C	C	C	C	C	E	E	E	E	E	E
82	820	M	M	M	M	C	C	C	C	C	C	E	E	E	E	E	E
100	101	M	M	M	M	C	C	C	C	C	C	E	E	E	E	E	E
120	121	M	M	M	M	C	C	C	C	C	C	E	E	E	E	E	E
150	151	M	M	M	M	C	C	C	C	C	C	E	E	E	E	E	E
180	181	M	M	M	M	C	C	C	C	C	C	E	E	E	E	E	E
220	221	M	M	M	M	C	C	C	C	C	C	E	E	E	E	E	E
270	271	M	M	M	M	C	C	C	C	C	C	E	E	E	E	E	E
330	331	M	M	M	M	C	C	C	C	C	C	E	E	E	E	E	E
390	391	M	M	M	M	C	C	C	C	C	C	E	E	E	E	E	E
470	471	M	M	M	M	C	C	C	C	C	C	E	E	E	E	E	E
560	561	M	M	M	M	C	C	C	C	C	C	E	E	E	E	E	E
680	681	M	M	M	M	C	C	C	C	C	C	E	E	E	E	E	E
820	821	M	M	M	M	C	C	C	C	C	C	E	E	E	E	E	E
1000	102	M	M	M	M	C	C	C	C	C	C	E	E	E	E	E	E
1200	122	M	M	M	M	C	C	C	C	C	C	E	E	E	E	E	E
1500	152	M	M	M	M	C	C	C	C	C	C	E	E	E	E	E	E
1800	182	M	M	M	M	C	C	C	C	C	C	E	E	E	E	E	E
2200	222	M	M	M	M	C	C	C	C	C	C	E	E	E	E	E	E
2700	272	M	M	M	M	C	C	C	C	C	C	E	E	E	E	E	E
3300	332	M	M	M	M	C	C	C	C	C	C	E	E	E	E	E	E
3900	392	M	M	M	M	C	C	C	C	C	C	E	E	E	E	E	E
4700	472	M	M	M	C	C	C	C	C	C	C	E	E	E	E	E	E
5600	562	M	M	M	C	C	C	C	C	C	C	E	E	E	E	E	E
6800	682	M	M	M	E	C	C	C	C	C	C	E	E	E	E	E	E
8200	822	M	M	M	E	C	C	C	C	C	C	E	E	E	E	E	E
10000	103	M	M	M	E	C	C	C	C	C	C	E	E	E	E	E	E
12000	123	C	C	C	E	E	E	C	C	C	C	E	E	E	E	E	E
15000	153	C	C	C	E	E	E	C	C	C	C	E	E	E	E	E	E
18000	183	F	F	F	F	F	F	C	C	C	C	E	E	E	E	E	E
22000	223	F	F	F	F	F	F	C	C	C	C	E	E	E	E	E	E
27000	273	F	F	F	G	F	F	C	C	C	C	E	E	E	E	E	E
33000	333	F	F	F	G	F	F	C	C	C	C	E	E	E	E	E	E
39000	393			G	G	F	F					F	F	E	E	E	E
47000	473			G	G					F	F	E	E	E	E	E	E
56000	563			G	G					G	G	E	E	E	E	E	E
68000	683			G	G					G	G	E	E	F	F	E	E
82000	823									G	G	F	F	G	G	F	F
100000	104									G	G	G	G	G	G	F	F
120000	124									G	G	G	G	G	G	G	G
150000	154									G	G	G	G	G	G	G	G
180000	184											G	G	G	G	G	G
220000	224											G	G	G	G	G	G
270000	274											G	G	G	G	G	G
330000	334													G	G	G	G
390000	394															G	G

7. CAPACITANCE RANGE(Con.)

7-2. X7R

Cap(pF)	EIA Size	0201					0402					0603					0805				
		Code	6.3V	10V	16V	25V	50V	6.3V	10V	16V	25V	50V	6.3V	10V	16V	25V	50V	6.3V	10V	16V	25V
100	101			L	L	L		N	N	N	N		S	S	S	S		X	X	X	X
120	121			L	L	L		N	N	N	N		S	S	S	S		X	X	X	X
150	151			L	L	L		N	N	N	N		S	S	S	S		X	X	X	X
180	181			L	L	L		N	N	N	N		S	S	S	S		X	X	X	X
220	221			L	L	L		N	N	N	N		S	S	S	S		X	X	X	X
270	271			L	L	L		N	N	N	N		S	S	S	S		X	X	X	X
330	331			L	L	L		N	N	N	N		S	S	S	S		X	X	X	X
390	391			L	L	L		N	N	N	N		S	S	S	S		X	X	X	X
470	471			L	L	L		N	N	N	N		S	S	S	S		X	X	X	X
560	561			L	L	L		N	N	N	N		S	S	S	S		X	X	X	X
680	681			L	L	L		N	N	N	N		S	S	S	S		X	X	X	X
820	821			L	L	L		N	N	N	N		S	S	S	S		X	X	X	X
1000	102	L	L	L	L	L		N	N	N	N		S	S	S	S		X	X	X	X
1200	122	L	L	L	L			N	N	N	N		S	S	S	S		X	X	X	X
1500	152	L	L	L	L			N	N	N	N		S	S	S	S		X	X	X	X
1800	182	L	L	L	L			N	N	N	N		S	S	S	S		X	X	X	X
2200	222	L	L	L	L			N	N	N	N		S	S	S	S		X	X	X	X
2700	272	L	L	L	L			N	N	N	N		S	S	S	S		X	X	X	X
3300	332	L	L	L	L			N	N	N	N		S	S	S	S		X	X	X	X
3900	392	L	L	L	L			N	N	N	N		S	S	S	S		X	X	X	X
4700	472	L	L	L	L			N	N	N	N		S	S	S	S		X	X	X	X
5600	562	L	L					N	N	N	N		S	S	S	S		X	X	X	X
6800	682	L	L					N	N	N	N		S	S	S	S		X	X	X	X
8200	822	L	L					N	N	N	N		S	S	S	S		X	X	X	X
10000	103	L	L	L	L			N	N	N	N		S	S	S	S		X	X	X	X
12000	123							N	N	N			S	S	S	S		X	X	X	X
15000	153							N	N	N			S	S	S	S		X	X	X	X
18000	183							N	N	N			S	S	S	S		X	X	X	X
22000	223		L	L				N	N	N			S	S	S	S		X	X	X	X
27000	273							N	N	N			S	S	S	S		X	X	X	X
33000	333							N	N	N			S	S	S	B		X	X	X	X
39000	393							N	N	N			S	S	S	B		X	X	X	X
47000	473							N	N	N			S	S	S	B		X	X	X	X
56000	563							N	N	N			S	S	S	B		X	X	X	X
68000	683							N	N	N			S	S	S	B		X	X	X	X
82000	823							N	N	N			S	S	S	B		X	X	X	X
100000	104						N	N	N	N			S	S	S	B		X	X	X	X
120000	124												S	S	B			X	X	X	C
150000	154												S	S	B			C	C	C	C
180000	184												S	S	B			C	C	C	C
220000	224						N	N	N	N			S	S	B	B		C	C	C	C
270000	274											B	B	B	B		C	C	C	C	I
330000	334												B	B	B	B		C	C	C	I
390000	394												B	B	B			C	C	C	I
470000	474						N	N				B	B	B	B	B		C	C	C	I
560000	564												B	B				C	C	C	
680000	684											B	B	B				C	C	C	
820000	824												B	B				C	C	C	

7. CAPACITANCE RANGE(Con.)

7-2. X7R

Cap(pF)	EIA Size	1206					1210					1808		1812				1825		2220		2225			
		Code	6.3V	10V	16V	25V	50V	6.3V	10V	16V	25V	50V	25V	50V	10V	16V	25V	50V	25V	50V	25V	50V	25V	50V	
100	101					X																			
120	121					X																			
150	151		X	X	X	X						C	C												
180	181		X	X	X	X						C	C												
220	221		X	X	X	X					M	C	C												
270	271		X	X	X	X					M	C	C									C			
330	331		X	X	X	X					M	C	C									C			
390	391		X	X	X	X					M	C	C									C			
470	471		X	X	X	X					M	C	C									C			
560	561		X	X	X	X					M	C	C									C			
680	681		X	X	X	X					M	C	C									C			
820	821		X	X	X	X					M	C	C									C			
1000	102		X	X	X	X		M	M	M	M	C	C	C	C	C	C	F	F	F	F	F	F	F	F
1200	122		X	X	X	X		M	M	M	M	C	C	C	C	C	C	F	F	F	F	F	F	F	F
1500	152		X	X	X	X		M	M	M	M	C	C	C	C	C	C	F	F	F	F	F	F	F	F
1800	182		X	X	X	X		M	M	M	M	C	C	C	C	C	C	F	F	F	F	F	F	F	F
2200	222		X	X	X	X		M	M	M	M	C	C	C	C	C	C	F	F	F	F	F	F	F	F
2700	272		X	X	X	X		M	M	M	M	C	C	C	C	C	C	F	F	F	F	F	F	F	F
3300	332		X	X	X	X		M	M	M	M	C	C	C	C	C	C	F	F	F	F	F	F	F	F
3900	392		X	X	X	X		M	M	M	M	C	C	C	C	C	C	F	F	F	F	F	F	F	F
4700	472		X	X	X	X		M	M	M	M	C	C	C	C	C	C	F	F	F	F	F	F	F	F
5600	562		X	X	X	X		M	M	M	M	C	C	C	C	C	C	F	F	F	F	F	F	F	F
6800	682		X	X	X	X		M	M	M	M	C	C	C	C	C	C	F	F	F	F	F	F	F	F
8200	822		X	X	X	X		M	M	M	M	C	C	C	C	C	C	F	F	F	F	F	F	F	F
10000	103		X	X	X	X		M	M	M	M	C	C	C	C	C	C	F	F	F	F	F	F	F	F
12000	123		X	X	X	X		M	M	M	M	E	E	C	C	C	C	F	F	F	F	F	F	F	F
15000	153		X	X	X	X		M	M	M	M	E	E	C	C	C	C	F	F	F	F	F	F	F	F
18000	183		X	X	X	X		M	M	M	M	E	E	C	C	C	C	F	F	F	F	F	F	F	F
22000	223		X	X	X	X		M	M	M	M	E	E	C	C	C	C	F	F	F	F	F	F	F	F
27000	273		X	X	X	X		M	M	M	M	E	E	C	C	C	C	F	F	F	F	F	F	F	F
33000	333		X	X	X	X		M	M	M	M	E	E	C	C	C	C	F	F	F	F	F	F	F	F
39000	393		X	X	X	X		M	M	M	M	E	E	C	C	C	C	F	F	F	F	F	F	F	F
47000	473		X	X	X	X		M	M	M	M	E	E	C	C	C	C	F	F	F	F	F	F	F	F
56000	563		X	X	X	X		M	M	M	M	E	E	C	C	C	C	F	F	F	F	F	F	F	F
68000	683		X	X	X	X		M	M	M	M	E	E	C	C	C	C	F	F	F	F	F	F	F	F
82000	823		X	X	X	X		M	M	M	M	E	E	C	C	C	C	F	F	F	F	F	F	F	F
100000	104		X	X	X	X		M	M	M	M	E	E	C	C	C	C	F	F	F	F	F	F	F	F
120000	124		X	X	X	X		M	M	M	M	E	E	C	C	C	C	F	F	F	F	F	F	F	F
150000	154		M	M	M	M		M	M	M	M	E	E	C	C	C	C	F	F	F	F	F	F	F	F
180000	184		M	M	M	M		M	M	M	M	E	E	C	C	C	C	F	F	F	F	F	F	F	F
220000	224		M	M	M	M		M	M	M	M	E	E	C	C	C	C	F	F	F	F	F	F	F	F
270000	274		M	M	M	C		M	M	M	M	F	F	C	C	C	C	F	F	F	F	F	F	F	F
330000	334		M	M	M	C		M	M	M	C	F	F	C	C	C	C	F	F	F	F	F	F	F	F
390000	394		M	M	J	P		M	M	M	C	F	F	C	C	C	C	F	F	F	F	F	F	F	F
470000	474		J	J	J	P		M	M	M	C	F	F	C	C	C	C	F	F	F	F	F	F	F	F
560000	564		J	J	J	P		C	C	C	C	F	F	C	C	C	C	F	F	F	F	F	F	F	F
680000	684		J	J	J	P		C	C	C	C	F	F	C	C	C	C	F	F	F	F	F	F	F	F
820000	824		J	J	J	P		C	C	C	C			C	C	C	C	F	F	F	F	F	F	F	F

7. CAPACITANCE RANGE(Con.)

7-3. X5R

Cap(pF)	EIA Size Code	0201					0402					0603							
		4V	6.3V	10V	16V	25V	50V	4V	6.3V	10V	16V	25V	50V	4V	6.3V	10V	16V	25V	50V
100	101				L	L	L												
120	121				L	L	L												
150	151				L	L	L												
180	181				L	L	L												
220	221				L	L	L												
270	271				L	L	L												
330	331				L	L	L												
390	391				L	L	L												
470	471				L	L	L												
560	561				L	L	L												
680	681				L	L	L												
820	821				L	L	L												
1000	102			L	L	L	L												
1500	152			L	L	L													
2200	222			L	L	L													
2700	272			L	L	L													
3300	332			L	L	L													
4700	472			L	L	L													
6800	682			L	L	L													
10000	103		L	L	L	L	L												
15000	153		L	L															
22000	223		L	L															
27000	273		L	L							N								
33000	333		L	L							N								
39000	393		L	L							N								
47000	473		L	L					N	N	N								
56000	563		L	L					N	N	N								
68000	683		L	L					N	N	N								
82000	823		L	L					N	N	N								
100000	104		L	L	L	L			N	N	N	N						S	
150000	154								N	N	N	N							
220000	224		L	L	L				N	N	N	N	N		B	B	B	B	B
270000	274									N						B	B	B	
330000	334		L						N	N					B	B	B	B	
390000	394									N						B	B	B	
470000	474	L	L						N	N	K	K	K		B	B	B	B	B
680000	684								N	N					B	B	B	B	
820000	824														B	B	B	B	

7. CAPACITANCE RANGE(Con.)

7-4. Y5V

Cap(pF)	EIA Size	0201	0402					0603					0805			
	Code	6.3V	6.3V	10V	16V	25V	50V	6.3V	10V	16V	25V	50V	10V	16V	25V	50V
10000	103			N	N	N	N		S	S	S	S	A	A	A	A
15000	153			N	N	N	N		S	S	S	S	A	A	A	A
22000	223			N	N	N	N		S	S	S	S	A	A	A	A
33000	333			N	N	N	N		S	S	S	S	A	A	A	A
47000	473			N	N	N			S	S	S	S	A	A	A	A
68000	683			N	N	N			S	S	S	S	A	A	A	A
100000	104	L		N	N	N			S	S	S	S	A	A	A	A
150000	154			N	N				S	S	S	S	A	A	A	A
220000	224		N	N	N			S	S	S	S	S	A	A	A	A
330000	334		N	N	N				S	S	S	B	X	X	X	X
470000	474		N	N	N				S	S	B	B	X	X	X	X/C
680000	684		N						S	B	B		X	X	C	C

Cap(pF)	EIA Size	1206				1210				1812			
	Code	10V	16V	25V	50V	10V	16V	25V	50V	10V	16V	25V	50V
10000	103	X	X	X	X								
15000	153	X	X	X	X								
22000	223	X	X	X	X								
33000	333	X	X	X	X								
47000	473	X	X	X	X								
68000	683	X	X	X	X								
100000	104	X	X	X	X	M	M	M	M	C	C	C	C
150000	154	X	X	X	X	M	M	M	M	C	C	C	C
220000	224	X	X	X	X	M	M	M	M	C	C	C	C
330000	334	X	X	X	X	M	M	M	M	C	C	C	C
470000	474	X	X	X	X	M	M	M	M	C	C	C	C
680000	684	X	X	X	X	M	M	M	M	C	C	C	C

8. RELIABILITY TEST CONDITIONS AND REQUIREMENTS

No.	Item	Test Condition	Requirements																																																												
1.	Visual and Dimensions	---	* No remarkable defect. * Dimensions to confirm to individual specification sheet.																																																												
2.	Capacitance		* Shall not exceed the limits given in the detailed spec. * C0G : Cap.≥30pF, Q≥1000; Cap.<30pF, Q≥400+20C. * X7R, X5R																																																												
3.	Q/D.F. (Dissipation Factor)	* Class I : (C0G) Cap.≤1000pF, 1.0±0.2Vrms, 1MHz±10%. Cap.>1000pF, 1.0±0.2Vrms, 1KHz±10%. * Class II : (X7R, X5R, Y5V) Cap.≤10μF, 1.0±0.2Vrms, 1KHz±10%**. Cap.>10μF, 0.5±0.2Vrms, 120Hz±20%. ** Test condition : 0.5±0.2Vrms, 1KHz±10%. X7R : 0805=106(6.3V&10V), 0603=475(6.3V). X6S : 0201≥104(6.3V&10V), 0402≥225(6.3V), 0402/475(10V), 0603/106(6.3V). X5R : 01R5≥103, 0201≥224(6.3V, 10V, 16V) ^{#1} , 0402≥475(6.3V, 16V), 0402≥225(10V), 0603=106(6.3V, 10V).	<table border="1"> <thead> <tr> <th>Rated</th> <th>D.F.≤</th> <th>Exception of D.F.≤</th> </tr> </thead> <tbody> <tr> <td rowspan="3">50V</td> <td rowspan="3">≤2.5%</td> <td>≤3% 0201(50V), 0603≥0.047μF, 0805≥0.18μF, 1206≥0.47μF</td> </tr> <tr> <td>≤5% 0201≥0.01μF, 1210≥4.7μF</td> </tr> <tr> <td>≤10% 0402≥0.1μF, 0603>0.1μF, 0805≥1μF, 1206≥2.2μF, 1210≥10μF</td> </tr> <tr> <td>35V</td> <td>≤3.5%</td> <td>≤10% 0603≥1μF, 0805≥2.2μF, 1206≥2.2μF, 1210≥10μF</td> </tr> <tr> <td rowspan="3">25V</td> <td rowspan="3">≤3.5%</td> <td>≤5% 0201≥0.01μF, 0805≥1μF, 1210≥10μF</td> </tr> <tr> <td>≤7% 0603≥0.33μF, 1206≥4.7μF</td> </tr> <tr> <td>≤10% 0201≥0.1μF, 0402≥0.10μF, 0603≥0.47μF, 0805≥2.2μF, 1206≥6.8μF, 1210≥22μF</td> </tr> <tr> <td rowspan="2">16V</td> <td rowspan="2">≤3.5%</td> <td>≤5% 0201≥0.01μF, 0402≥0.033μF, 0603≥0.15μF, 0805≥0.68μF, 1206≥2.2μF, 1210≥4.7μF</td> </tr> <tr> <td>≤10% 0201≥0.1μF(0201/X7R≥0.022μF), 0402≥0.22μF, 0603≥0.68μF, 0805≥2.2μF, 1206≥4.7μF, 1210≥22μF</td> </tr> <tr> <td>10V</td> <td>≤5%</td> <td>≤10% 0201≥0.012μF, 0402≥0.33μF(0402/X7R≥0.22μF), 0603≥0.33μF, 0805≥2.2μF, 1206≥2.2μF, 1210≥22μF</td> </tr> <tr> <td rowspan="2">6.3V</td> <td rowspan="2">≤10%</td> <td>≤15% 0201≥0.1μF, 0402≥1μF</td> </tr> <tr> <td>≤20% 0201≥0.1μF, 0402≥1μF, 0603≥10μF, 0805≥4.7μF, 1206≥47μF, 1210≥100μF</td> </tr> <tr> <td>4V</td> <td>≤15%</td> <td>---</td> </tr> </tbody> </table> <table border="1"> <thead> <tr> <th>Rated Vol.</th> <th>D.F.≤</th> <th>Exception of D.F.≤</th> </tr> </thead> <tbody> <tr> <td rowspan="2">≥50V</td> <td rowspan="2">≤5%</td> <td>≤7% 0603≥0.1μF, 0805≥0.47μF, 1206≥4.7μF</td> </tr> <tr> <td>≤12.5% 1210≥6.8μF</td> </tr> <tr> <td>35V</td> <td>≤7%</td> <td>---</td> </tr> <tr> <td rowspan="3">25V</td> <td rowspan="3">≤5%</td> <td>≤7% 0402≥0.047μF, 0603≥0.1μF, 0805≥0.33μF, 1206≥1μF, 1210≥4.7μF</td> </tr> <tr> <td>≤9% 0402≥0.068μF, 0603≥0.47μF, 1206≥4.7μF, 1210≥22μF</td> </tr> <tr> <td>≤12.5% 0402≥0.22μF</td> </tr> <tr> <td>16V (C<1.0μF)</td> <td>≤7%</td> <td>≤9% 0402≥0.068μF, 0603≥0.68μF</td> </tr> <tr> <td>16V (C≥1.0μF)</td> <td>≤9%</td> <td>≤12.5% 0402≥0.22μF</td> </tr> <tr> <td>10V</td> <td>≤12.5%</td> <td>≤20% 0603≥2.2μF, 0805≥3.3μF, 1206≥10μF, 1210≥22μF, 1812≥47μF</td> </tr> <tr> <td>6.3V</td> <td>≤20%</td> <td>0402≥0.47μF</td> </tr> </tbody> </table>	Rated	D.F.≤	Exception of D.F.≤	50V	≤2.5%	≤3% 0201(50V), 0603≥0.047μF, 0805≥0.18μF, 1206≥0.47μF	≤5% 0201≥0.01μF, 1210≥4.7μF	≤10% 0402≥0.1μF, 0603>0.1μF, 0805≥1μF, 1206≥2.2μF, 1210≥10μF	35V	≤3.5%	≤10% 0603≥1μF, 0805≥2.2μF, 1206≥2.2μF, 1210≥10μF	25V	≤3.5%	≤5% 0201≥0.01μF, 0805≥1μF, 1210≥10μF	≤7% 0603≥0.33μF, 1206≥4.7μF	≤10% 0201≥0.1μF, 0402≥0.10μF, 0603≥0.47μF, 0805≥2.2μF, 1206≥6.8μF, 1210≥22μF	16V	≤3.5%	≤5% 0201≥0.01μF, 0402≥0.033μF, 0603≥0.15μF, 0805≥0.68μF, 1206≥2.2μF, 1210≥4.7μF	≤10% 0201≥0.1μF(0201/X7R≥0.022μF), 0402≥0.22μF, 0603≥0.68μF, 0805≥2.2μF, 1206≥4.7μF, 1210≥22μF	10V	≤5%	≤10% 0201≥0.012μF, 0402≥0.33μF(0402/X7R≥0.22μF), 0603≥0.33μF, 0805≥2.2μF, 1206≥2.2μF, 1210≥22μF	6.3V	≤10%	≤15% 0201≥0.1μF, 0402≥1μF	≤20% 0201≥0.1μF, 0402≥1μF, 0603≥10μF, 0805≥4.7μF, 1206≥47μF, 1210≥100μF	4V	≤15%	---	Rated Vol.	D.F.≤	Exception of D.F.≤	≥50V	≤5%	≤7% 0603≥0.1μF, 0805≥0.47μF, 1206≥4.7μF	≤12.5% 1210≥6.8μF	35V	≤7%	---	25V	≤5%	≤7% 0402≥0.047μF, 0603≥0.1μF, 0805≥0.33μF, 1206≥1μF, 1210≥4.7μF	≤9% 0402≥0.068μF, 0603≥0.47μF, 1206≥4.7μF, 1210≥22μF	≤12.5% 0402≥0.22μF	16V (C<1.0μF)	≤7%	≤9% 0402≥0.068μF, 0603≥0.68μF	16V (C≥1.0μF)	≤9%	≤12.5% 0402≥0.22μF	10V	≤12.5%	≤20% 0603≥2.2μF, 0805≥3.3μF, 1206≥10μF, 1210≥22μF, 1812≥47μF	6.3V	≤20%	0402≥0.47μF			
			Rated	D.F.≤	Exception of D.F.≤																																																										
50V	≤2.5%	≤3% 0201(50V), 0603≥0.047μF, 0805≥0.18μF, 1206≥0.47μF																																																													
		≤5% 0201≥0.01μF, 1210≥4.7μF																																																													
		≤10% 0402≥0.1μF, 0603>0.1μF, 0805≥1μF, 1206≥2.2μF, 1210≥10μF																																																													
35V	≤3.5%	≤10% 0603≥1μF, 0805≥2.2μF, 1206≥2.2μF, 1210≥10μF																																																													
25V	≤3.5%	≤5% 0201≥0.01μF, 0805≥1μF, 1210≥10μF																																																													
		≤7% 0603≥0.33μF, 1206≥4.7μF																																																													
		≤10% 0201≥0.1μF, 0402≥0.10μF, 0603≥0.47μF, 0805≥2.2μF, 1206≥6.8μF, 1210≥22μF																																																													
16V	≤3.5%	≤5% 0201≥0.01μF, 0402≥0.033μF, 0603≥0.15μF, 0805≥0.68μF, 1206≥2.2μF, 1210≥4.7μF																																																													
		≤10% 0201≥0.1μF(0201/X7R≥0.022μF), 0402≥0.22μF, 0603≥0.68μF, 0805≥2.2μF, 1206≥4.7μF, 1210≥22μF																																																													
10V	≤5%	≤10% 0201≥0.012μF, 0402≥0.33μF(0402/X7R≥0.22μF), 0603≥0.33μF, 0805≥2.2μF, 1206≥2.2μF, 1210≥22μF																																																													
6.3V	≤10%	≤15% 0201≥0.1μF, 0402≥1μF																																																													
		≤20% 0201≥0.1μF, 0402≥1μF, 0603≥10μF, 0805≥4.7μF, 1206≥47μF, 1210≥100μF																																																													
4V	≤15%	---																																																													
Rated Vol.	D.F.≤	Exception of D.F.≤																																																													
≥50V	≤5%	≤7% 0603≥0.1μF, 0805≥0.47μF, 1206≥4.7μF																																																													
		≤12.5% 1210≥6.8μF																																																													
35V	≤7%	---																																																													
25V	≤5%	≤7% 0402≥0.047μF, 0603≥0.1μF, 0805≥0.33μF, 1206≥1μF, 1210≥4.7μF																																																													
		≤9% 0402≥0.068μF, 0603≥0.47μF, 1206≥4.7μF, 1210≥22μF																																																													
		≤12.5% 0402≥0.22μF																																																													
16V (C<1.0μF)	≤7%	≤9% 0402≥0.068μF, 0603≥0.68μF																																																													
16V (C≥1.0μF)	≤9%	≤12.5% 0402≥0.22μF																																																													
10V	≤12.5%	≤20% 0603≥2.2μF, 0805≥3.3μF, 1206≥10μF, 1210≥22μF, 1812≥47μF																																																													
6.3V	≤20%	0402≥0.47μF																																																													
4.	Temperature Coefficient	* With no electrical load. <table border="1"> <thead> <tr> <th>T.C.</th> <th>Operating Temp.</th> </tr> </thead> <tbody> <tr> <td>C0G</td> <td>-55~125°C at 25°C</td> </tr> <tr> <td>X7R</td> <td>-55~125°C at 25°C</td> </tr> <tr> <td>X5R</td> <td>-55~85°C at 25°C</td> </tr> <tr> <td>Y5V</td> <td>-25~85°C at 20°C</td> </tr> </tbody> </table> * Measurement voltage for Class II : <table border="1"> <thead> <tr> <th>Size</th> <th>Cap. Range</th> <th>Condition</th> </tr> </thead> <tbody> <tr> <td rowspan="3">0201</td> <td>Cap.<0.1μF</td> <td>1V</td> </tr> <tr> <td>0.1μF≤Cap.<1μF</td> <td>0.2V</td> </tr> <tr> <td>Cap.≥1μF</td> <td>0.1V</td> </tr> <tr> <td rowspan="3">0402</td> <td>Cap.<0.1μF</td> <td>1V</td> </tr> <tr> <td>Cap.=1μF</td> <td>0.5V</td> </tr> <tr> <td>1μF<Cap.<10μF</td> <td>0.2V</td> </tr> <tr> <td rowspan="3">0603</td> <td>Cap.≥10μF</td> <td>0.1V</td> </tr> <tr> <td>Cap.≤1μF</td> <td>1V</td> </tr> <tr> <td>1μF<Cap.≤4.7μF</td> <td>0.5V</td> </tr> <tr> <td rowspan="3">0805</td> <td>Cap.>4.7μF</td> <td>0.2V</td> </tr> <tr> <td>Cap.<10μF</td> <td>1V</td> </tr> <tr> <td>Cap.=10μF</td> <td>0.5V</td> </tr> <tr> <td rowspan="3">1206/1210</td> <td>Cap.>10μF</td> <td>0.2V</td> </tr> <tr> <td>Cap.≤10μF</td> <td>1V</td> </tr> <tr> <td>10μF<Cap.≤100μF</td> <td>0.5V</td> </tr> <tr> <td>Cap.>100μF</td> <td>0.2V</td> </tr> </tbody> </table>	T.C.	Operating Temp.	C0G	-55~125°C at 25°C	X7R	-55~125°C at 25°C	X5R	-55~85°C at 25°C	Y5V	-25~85°C at 20°C	Size	Cap. Range	Condition	0201	Cap.<0.1μF	1V	0.1μF≤Cap.<1μF	0.2V	Cap.≥1μF	0.1V	0402	Cap.<0.1μF	1V	Cap.=1μF	0.5V	1μF<Cap.<10μF	0.2V	0603	Cap.≥10μF	0.1V	Cap.≤1μF	1V	1μF<Cap.≤4.7μF	0.5V	0805	Cap.>4.7μF	0.2V	Cap.<10μF	1V	Cap.=10μF	0.5V	1206/1210	Cap.>10μF	0.2V	Cap.≤10μF	1V	10μF<Cap.≤100μF	0.5V	Cap.>100μF	0.2V	<table border="1"> <thead> <tr> <th>T.C.</th> <th>Capacitance Change</th> </tr> </thead> <tbody> <tr> <td>C0G</td> <td>Within ±30ppm/°C</td> </tr> <tr> <td>X7R</td> <td>Within ±15%</td> </tr> <tr> <td>X5R</td> <td>Within ±15%</td> </tr> <tr> <td>Y5V</td> <td>Within +30%/-80%</td> </tr> </tbody> </table>	T.C.	Capacitance Change	C0G	Within ±30ppm/°C	X7R	Within ±15%	X5R	Within ±15%	Y5V	Within +30%/-80%
T.C.	Operating Temp.																																																														
C0G	-55~125°C at 25°C																																																														
X7R	-55~125°C at 25°C																																																														
X5R	-55~85°C at 25°C																																																														
Y5V	-25~85°C at 20°C																																																														
Size	Cap. Range	Condition																																																													
0201	Cap.<0.1μF	1V																																																													
	0.1μF≤Cap.<1μF	0.2V																																																													
	Cap.≥1μF	0.1V																																																													
0402	Cap.<0.1μF	1V																																																													
	Cap.=1μF	0.5V																																																													
	1μF<Cap.<10μF	0.2V																																																													
0603	Cap.≥10μF	0.1V																																																													
	Cap.≤1μF	1V																																																													
	1μF<Cap.≤4.7μF	0.5V																																																													
0805	Cap.>4.7μF	0.2V																																																													
	Cap.<10μF	1V																																																													
	Cap.=10μF	0.5V																																																													
1206/1210	Cap.>10μF	0.2V																																																													
	Cap.≤10μF	1V																																																													
	10μF<Cap.≤100μF	0.5V																																																													
Cap.>100μF	0.2V																																																														
T.C.	Capacitance Change																																																														
C0G	Within ±30ppm/°C																																																														
X7R	Within ±15%																																																														
X5R	Within ±15%																																																														
Y5V	Within +30%/-80%																																																														

8. RELIABILITY TEST CONDITIONS AND REQUIREMENTS

No.	Item	Test Condition	Requirements															
5.	Insulation Resistance	* To apply rated voltage for Max. 120sec.	<p>* $\geq 10G\Omega$ or $RxC \geq 500\Omega \cdot F$, whichever is smaller. * Class II (X7R, X5R, Y5V) :</p> <table border="1"> <thead> <tr> <th>Rated voltage</th> <th>I.R.</th> </tr> </thead> <tbody> <tr> <td>50V : 0402$\geq 0.01\mu F$, 0603$\geq 1\mu F$, 0805$\geq 1\mu F$, 1206$\geq 4.7\mu F$, 1210$\geq 4.7\mu F$</td> <td rowspan="5">$\geq 10G\Omega$ or $RxC \geq 100\Omega \cdot F$, whichever is smaller</td> </tr> <tr> <td>35V : 0805$\geq 2.2\mu F$, 1206$\geq 2.2\mu F$, 1210$\geq 10\mu F$</td> </tr> <tr> <td>25V : 0402$\geq 1\mu F$, 0603$\geq 2.2\mu F$, 0805$\geq 2.2\mu F$, 1206$\geq 10\mu F$, 1210$\geq 10\mu F$</td> </tr> <tr> <td>16V : 0201$\geq 0.1\mu F$, 0402$\geq 0.22\mu F$, 0603$\geq 1\mu F$, 0805$\geq 2.2\mu F$, 1206$\geq 10\mu F$, 1210$\geq 47\mu F$</td> </tr> <tr> <td>10V : 0201$\geq 47nF$, 0402$\geq 0.47\mu F$, 0603$\geq 0.47\mu F$, 0805$\geq 2.2\mu F$, 1206$\geq 4.7\mu F$, 1210$\geq 47\mu F$</td> </tr> <tr> <td>6.3V, 4V</td> <td></td> </tr> </tbody> </table>	Rated voltage	I.R.	50V : 0402 $\geq 0.01\mu F$, 0603 $\geq 1\mu F$, 0805 $\geq 1\mu F$, 1206 $\geq 4.7\mu F$, 1210 $\geq 4.7\mu F$	$\geq 10G\Omega$ or $RxC \geq 100\Omega \cdot F$, whichever is smaller	35V : 0805 $\geq 2.2\mu F$, 1206 $\geq 2.2\mu F$, 1210 $\geq 10\mu F$	25V : 0402 $\geq 1\mu F$, 0603 $\geq 2.2\mu F$, 0805 $\geq 2.2\mu F$, 1206 $\geq 10\mu F$, 1210 $\geq 10\mu F$	16V : 0201 $\geq 0.1\mu F$, 0402 $\geq 0.22\mu F$, 0603 $\geq 1\mu F$, 0805 $\geq 2.2\mu F$, 1206 $\geq 10\mu F$, 1210 $\geq 47\mu F$	10V : 0201 $\geq 47nF$, 0402 $\geq 0.47\mu F$, 0603 $\geq 0.47\mu F$, 0805 $\geq 2.2\mu F$, 1206 $\geq 4.7\mu F$, 1210 $\geq 47\mu F$	6.3V, 4V						
Rated voltage	I.R.																	
50V : 0402 $\geq 0.01\mu F$, 0603 $\geq 1\mu F$, 0805 $\geq 1\mu F$, 1206 $\geq 4.7\mu F$, 1210 $\geq 4.7\mu F$	$\geq 10G\Omega$ or $RxC \geq 100\Omega \cdot F$, whichever is smaller																	
35V : 0805 $\geq 2.2\mu F$, 1206 $\geq 2.2\mu F$, 1210 $\geq 10\mu F$																		
25V : 0402 $\geq 1\mu F$, 0603 $\geq 2.2\mu F$, 0805 $\geq 2.2\mu F$, 1206 $\geq 10\mu F$, 1210 $\geq 10\mu F$																		
16V : 0201 $\geq 0.1\mu F$, 0402 $\geq 0.22\mu F$, 0603 $\geq 1\mu F$, 0805 $\geq 2.2\mu F$, 1206 $\geq 10\mu F$, 1210 $\geq 47\mu F$																		
10V : 0201 $\geq 47nF$, 0402 $\geq 0.47\mu F$, 0603 $\geq 0.47\mu F$, 0805 $\geq 2.2\mu F$, 1206 $\geq 4.7\mu F$, 1210 $\geq 47\mu F$																		
6.3V, 4V																		
6.	Dielectric Strength	<p>* To apply 250% of rated voltage. * Duration : 1 to 5 sec. * Charge and discharge current less than 50mA.</p>	* No evidence of damage or flash over during test.															
7.	Solderability	<p>* Solder temperature : $235 \pm 5^\circ C$ for (0201~1210). * Solder temperature : $245 \pm 5^\circ C$ for (1808~2225). * Dipping time : 2 ± 0.5 sec.</p>	* 75% min. coverage of all metalized area.															
8.	Resistance to Soldering Heat	<p>* Solder temperature : $260 \pm 5^\circ C$. * Dipping time : 10 ± 1 sec. * Preheating : 120 to $150^\circ C$ for 1 minute before immerse the capacitor in a eutectic solder. * Before initial measurement (Class II only) : To apply de-aging at $150^\circ C$ for 1hr then set for 24 ± 2 hrs at room temp. * Cap. / D.F. / I.R. Measurement to be made after de-aging at $150^\circ C$ for 1hr then set for 24 ± 2 hrs at room temp.</p>	<p>* No remarkable damage. * Cap. change : C0G : Within $\pm 2.5\%$ or $\pm 0.25pF$, whichever is larger. X7R, X5R : Within $\pm 7.5\%$. Y5V : Within $\pm 20\%$. * D.F./I.R. : To meet initial requirements. * 25% max. leaching on each edge.</p>															
9.	Temperature Cycle	<p>* Conduct the five cycles according to the temperatures and time.</p> <table border="1"> <thead> <tr> <th>Step</th> <th>Temp.($^\circ C$)</th> <th>Time(min.)</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>Min. operating temp. $+0/-3$</td> <td>30 ± 3</td> </tr> <tr> <td>2</td> <td>Room temp.</td> <td>2~3</td> </tr> <tr> <td>3</td> <td>Max. operating temp. $+3/-0$</td> <td>30 ± 3</td> </tr> <tr> <td>4</td> <td>Room temp.</td> <td>2~3</td> </tr> </tbody> </table> <p>* Before initial measurement (Class II only) : To apply de-aging at $150^\circ C$ for 1hr then set for 24 ± 2 hrs at room temp. * Cap./D.F./I.R. measurement to made after de-aging at $150^\circ C$ for 1hr then set for 24 ± 2 hrs at room temp .</p>	Step	Temp.($^\circ C$)	Time(min.)	1	Min. operating temp. $+0/-3$	30 ± 3	2	Room temp.	2~3	3	Max. operating temp. $+3/-0$	30 ± 3	4	Room temp.	2~3	<p>* No remarkable damage. * Cap. change : C0G : Within $\pm 2.5\%$ or $\pm 0.25pF$, whichever is larger. X7R, X5R : Within $\pm 7.5\%$. Y5V : Within $\pm 20\%$. * D.F. : $\leq 100\%$ of initial requirement. * I.R. : $\geq 25\%$ of initial requirement.</p>
Step	Temp.($^\circ C$)	Time(min.)																
1	Min. operating temp. $+0/-3$	30 ± 3																
2	Room temp.	2~3																
3	Max. operating temp. $+3/-0$	30 ± 3																
4	Room temp.	2~3																

8. RELIABILITY TEST CONDITIONS AND REQUIREMENTS

No.	Item	Test Condition	Requirements																																																																																															
10.	Humidity (Damp Heat) Steady State	* Test temp. : 40±2°C. * Humidity : 90~95%RH. * Test time : 500 +24/-0hrs. * Measurement to be made after keeping at room temp. for 48±4 hrs (Class II).	* No remarkable damage. * Cap. change : COG : Within ±5.0% or ±0.5pF, whichever is larger. X7R, X5R : Within ±12.5% for ≥10V**, within ±25% for 6.3V. **10V : Within ±25% for 0603≥4.7μF, 0402≥1μF, 0201≥0.1μF. Y5V : Within ±30% for ≥10V, within +30/-40% for 6.3V. * Q for COG : Cap.>30pF, Q≥350; 10pF≤Cap.≤30pF, Q≥275+2.5C; Cap.<10pF, Q≥200+10C. * D.F. for X7R, X5R <table border="1"> <thead> <tr> <th>Rated</th> <th>D.F.≤</th> <th colspan="2">Exception of D.F.≤</th> </tr> </thead> <tbody> <tr> <td rowspan="3">50V</td> <td rowspan="3">≤3%</td> <td>≤6%</td> <td>0201(50V), 0603≥0.047μF, 0805≥0.18μF, 1206≥0.47μF</td> </tr> <tr> <td>≤10%</td> <td>0201≥0.01μF, 1210≥4.7μF</td> </tr> <tr> <td>≤20%</td> <td>0402≥0.1μF, 0603>0.1μF, 0805≥1μF, 1206≥2.2μF, 1210≥10μF</td> </tr> <tr> <td>35V</td> <td>≤5%</td> <td>≤20%</td> <td>0603≥1μF, 0805≥2.2μF, 1206≥2.2μF, 1210≥10μF</td> </tr> <tr> <td rowspan="4">25V</td> <td rowspan="4">≤5%</td> <td>≤10%</td> <td>0201≥0.01μF, 0805≥1μF, 1210≥10μF</td> </tr> <tr> <td>≤14%</td> <td>0603≥0.33μF, 1206≥4.7μF</td> </tr> <tr> <td>≤15%</td> <td>0201≥0.1μF, 0402≥0.10μF, 0603≥0.47μF, 0805≥2.2μF, 1206≥6.8μF, 1210≥22μF</td> </tr> <tr> <td>≤20%</td> <td>0402≥0.47μF</td> </tr> <tr> <td rowspan="2">16V</td> <td rowspan="2">≤5%</td> <td>≤10%</td> <td>0201≥0.01μF, 0402≥0.033μF, 0603≥0.15μF, 0805≥0.68μF, 1206≥2.2μF, 1210≥4.7μF</td> </tr> <tr> <td>≤15%</td> <td>0201≥0.1μF(0201/X7R≥0.022μF), 0402≥0.22μF, 0603≥0.68μF, 0805≥2.2μF, 1206≥4.7μF, 1210≥22μF</td> </tr> <tr> <td rowspan="2">10V</td> <td rowspan="2">≤7.5%</td> <td>≤15%</td> <td>0201≥0.012μF, 0402≥0.33μF(0402/X7R≥0.22μF), 0603≥0.33μF, 0805≥2.2μF, 1206≥2.2μF, 1210≥22μF</td> </tr> <tr> <td>≤20%</td> <td>0201≥0.1μF, 0402≥1μF</td> </tr> <tr> <td>6.3V</td> <td>≤15%</td> <td>≤30%</td> <td>0201≥0.1μF, 0402≥1μF, 0603≥10μF, 0805≥4.7μF, 1206≥47μF, 1210≥100μF</td> </tr> <tr> <td>4V</td> <td>≤20%</td> <td>---</td> <td>---</td> </tr> </tbody> </table> * D.F. for Y5V <table border="1"> <thead> <tr> <th>Rated</th> <th>D.F.≤</th> <th colspan="2">Exception of D.F.≤</th> </tr> </thead> <tbody> <tr> <td rowspan="2">≥50V</td> <td rowspan="2">≤7.5%</td> <td>≤10%</td> <td>0603≥0.1μF, 0805≥0.47μF, 1206≥4.7μF</td> </tr> <tr> <td>≤20%</td> <td>1210≥6.8μF</td> </tr> <tr> <td>35V</td> <td>≤10%</td> <td>---</td> <td>---</td> </tr> <tr> <td rowspan="2">25V</td> <td rowspan="2">≤7.5%</td> <td>≤10%</td> <td>0402≥0.047μF, 0603≥0.1μF, 0805≥0.33μF, 1206≥1μF, 1210≥4.7μF</td> </tr> <tr> <td>≤15%</td> <td>0402≥0.068μF, 0603≥0.47μF, 1206≥4.7μF, 1210≥22μF</td> </tr> <tr> <td rowspan="2">16V (C<1.0μF)</td> <td rowspan="2">≤10%</td> <td>≤12.5%</td> <td>0402≥0.068μF, 0603≥0.68μF</td> </tr> <tr> <td>≤20%</td> <td>0402≥0.22μF</td> </tr> <tr> <td rowspan="2">16V (C≥1.0μF)</td> <td rowspan="2">≤12.5%</td> <td>≤20%</td> <td>0603≥2.2μF, 0805≥3.3μF, 1206≥10μF, 1210≥22μF, 1812≥47μF</td> </tr> <tr> <td>≤30%</td> <td>0402≥0.47μF</td> </tr> <tr> <td>10V</td> <td>≤20%</td> <td>≤30%</td> <td>0402≥0.47μF</td> </tr> <tr> <td>6.3V</td> <td>≤30%</td> <td>---</td> <td>---</td> </tr> </tbody> </table> * I.R. : ≥10V, ≥1GΩ or RxC≥50Ω-F, whichever is smaller. Class II (X7R, X5R, Y5V) <table border="1"> <thead> <tr> <th>Rated voltage</th> <th>I.R.</th> </tr> </thead> <tbody> <tr> <td>50V : 0402>0.01μF, 0603≥1μF, 0805≥1μF, 1206≥4.7μF, 1210≥4.7μF</td> <td rowspan="6">≥1GΩ or RxC≥10Ω-F, whichever is smaller</td> </tr> <tr> <td>35V : 0603≥1μF, 0805≥2.2μF, 1206≥2.2μF, 1210≥10μF</td> </tr> <tr> <td>25V : 0201≥0.1μF, 0402≥0.22μF, 0603≥2.2μF, 0805≥2.2μF, 1206≥10μF, 1210≥10μF</td> </tr> <tr> <td>16V : 0201≥0.1μF, 0402≥0.22μF, 0603≥1μF, 0805≥2.2μF, 1206≥10μF, 1210≥47μF</td> </tr> <tr> <td>10V : 0201≥47nF, 0402≥0.47μF, 0603≥0.47μF, 0805≥2.2μF, 1206≥4.7μF, 1210≥47μF</td> </tr> <tr> <td>6.3V, 4V</td> </tr> </tbody> </table>	Rated	D.F.≤	Exception of D.F.≤		50V	≤3%	≤6%	0201(50V), 0603≥0.047μF, 0805≥0.18μF, 1206≥0.47μF	≤10%	0201≥0.01μF, 1210≥4.7μF	≤20%	0402≥0.1μF, 0603>0.1μF, 0805≥1μF, 1206≥2.2μF, 1210≥10μF	35V	≤5%	≤20%	0603≥1μF, 0805≥2.2μF, 1206≥2.2μF, 1210≥10μF	25V	≤5%	≤10%	0201≥0.01μF, 0805≥1μF, 1210≥10μF	≤14%	0603≥0.33μF, 1206≥4.7μF	≤15%	0201≥0.1μF, 0402≥0.10μF, 0603≥0.47μF, 0805≥2.2μF, 1206≥6.8μF, 1210≥22μF	≤20%	0402≥0.47μF	16V	≤5%	≤10%	0201≥0.01μF, 0402≥0.033μF, 0603≥0.15μF, 0805≥0.68μF, 1206≥2.2μF, 1210≥4.7μF	≤15%	0201≥0.1μF(0201/X7R≥0.022μF), 0402≥0.22μF, 0603≥0.68μF, 0805≥2.2μF, 1206≥4.7μF, 1210≥22μF	10V	≤7.5%	≤15%	0201≥0.012μF, 0402≥0.33μF(0402/X7R≥0.22μF), 0603≥0.33μF, 0805≥2.2μF, 1206≥2.2μF, 1210≥22μF	≤20%	0201≥0.1μF, 0402≥1μF	6.3V	≤15%	≤30%	0201≥0.1μF, 0402≥1μF, 0603≥10μF, 0805≥4.7μF, 1206≥47μF, 1210≥100μF	4V	≤20%	---	---	Rated	D.F.≤	Exception of D.F.≤		≥50V	≤7.5%	≤10%	0603≥0.1μF, 0805≥0.47μF, 1206≥4.7μF	≤20%	1210≥6.8μF	35V	≤10%	---	---	25V	≤7.5%	≤10%	0402≥0.047μF, 0603≥0.1μF, 0805≥0.33μF, 1206≥1μF, 1210≥4.7μF	≤15%	0402≥0.068μF, 0603≥0.47μF, 1206≥4.7μF, 1210≥22μF	16V (C<1.0μF)	≤10%	≤12.5%	0402≥0.068μF, 0603≥0.68μF	≤20%	0402≥0.22μF	16V (C≥1.0μF)	≤12.5%	≤20%	0603≥2.2μF, 0805≥3.3μF, 1206≥10μF, 1210≥22μF, 1812≥47μF	≤30%	0402≥0.47μF	10V	≤20%	≤30%	0402≥0.47μF	6.3V	≤30%	---	---	Rated voltage	I.R.	50V : 0402>0.01μF, 0603≥1μF, 0805≥1μF, 1206≥4.7μF, 1210≥4.7μF	≥1GΩ or RxC≥10Ω-F, whichever is smaller	35V : 0603≥1μF, 0805≥2.2μF, 1206≥2.2μF, 1210≥10μF	25V : 0201≥0.1μF, 0402≥0.22μF, 0603≥2.2μF, 0805≥2.2μF, 1206≥10μF, 1210≥10μF	16V : 0201≥0.1μF, 0402≥0.22μF, 0603≥1μF, 0805≥2.2μF, 1206≥10μF, 1210≥47μF	10V : 0201≥47nF, 0402≥0.47μF, 0603≥0.47μF, 0805≥2.2μF, 1206≥4.7μF, 1210≥47μF	6.3V, 4V
Rated	D.F.≤	Exception of D.F.≤																																																																																																
50V	≤3%	≤6%	0201(50V), 0603≥0.047μF, 0805≥0.18μF, 1206≥0.47μF																																																																																															
		≤10%	0201≥0.01μF, 1210≥4.7μF																																																																																															
		≤20%	0402≥0.1μF, 0603>0.1μF, 0805≥1μF, 1206≥2.2μF, 1210≥10μF																																																																																															
35V	≤5%	≤20%	0603≥1μF, 0805≥2.2μF, 1206≥2.2μF, 1210≥10μF																																																																																															
25V	≤5%	≤10%	0201≥0.01μF, 0805≥1μF, 1210≥10μF																																																																																															
		≤14%	0603≥0.33μF, 1206≥4.7μF																																																																																															
		≤15%	0201≥0.1μF, 0402≥0.10μF, 0603≥0.47μF, 0805≥2.2μF, 1206≥6.8μF, 1210≥22μF																																																																																															
		≤20%	0402≥0.47μF																																																																																															
16V	≤5%	≤10%	0201≥0.01μF, 0402≥0.033μF, 0603≥0.15μF, 0805≥0.68μF, 1206≥2.2μF, 1210≥4.7μF																																																																																															
		≤15%	0201≥0.1μF(0201/X7R≥0.022μF), 0402≥0.22μF, 0603≥0.68μF, 0805≥2.2μF, 1206≥4.7μF, 1210≥22μF																																																																																															
10V	≤7.5%	≤15%	0201≥0.012μF, 0402≥0.33μF(0402/X7R≥0.22μF), 0603≥0.33μF, 0805≥2.2μF, 1206≥2.2μF, 1210≥22μF																																																																																															
		≤20%	0201≥0.1μF, 0402≥1μF																																																																																															
6.3V	≤15%	≤30%	0201≥0.1μF, 0402≥1μF, 0603≥10μF, 0805≥4.7μF, 1206≥47μF, 1210≥100μF																																																																																															
4V	≤20%	---	---																																																																																															
Rated	D.F.≤	Exception of D.F.≤																																																																																																
≥50V	≤7.5%	≤10%	0603≥0.1μF, 0805≥0.47μF, 1206≥4.7μF																																																																																															
		≤20%	1210≥6.8μF																																																																																															
35V	≤10%	---	---																																																																																															
25V	≤7.5%	≤10%	0402≥0.047μF, 0603≥0.1μF, 0805≥0.33μF, 1206≥1μF, 1210≥4.7μF																																																																																															
		≤15%	0402≥0.068μF, 0603≥0.47μF, 1206≥4.7μF, 1210≥22μF																																																																																															
16V (C<1.0μF)	≤10%	≤12.5%	0402≥0.068μF, 0603≥0.68μF																																																																																															
		≤20%	0402≥0.22μF																																																																																															
16V (C≥1.0μF)	≤12.5%	≤20%	0603≥2.2μF, 0805≥3.3μF, 1206≥10μF, 1210≥22μF, 1812≥47μF																																																																																															
		≤30%	0402≥0.47μF																																																																																															
10V	≤20%	≤30%	0402≥0.47μF																																																																																															
6.3V	≤30%	---	---																																																																																															
Rated voltage	I.R.																																																																																																	
50V : 0402>0.01μF, 0603≥1μF, 0805≥1μF, 1206≥4.7μF, 1210≥4.7μF	≥1GΩ or RxC≥10Ω-F, whichever is smaller																																																																																																	
35V : 0603≥1μF, 0805≥2.2μF, 1206≥2.2μF, 1210≥10μF																																																																																																		
25V : 0201≥0.1μF, 0402≥0.22μF, 0603≥2.2μF, 0805≥2.2μF, 1206≥10μF, 1210≥10μF																																																																																																		
16V : 0201≥0.1μF, 0402≥0.22μF, 0603≥1μF, 0805≥2.2μF, 1206≥10μF, 1210≥47μF																																																																																																		
10V : 0201≥47nF, 0402≥0.47μF, 0603≥0.47μF, 0805≥2.2μF, 1206≥4.7μF, 1210≥47μF																																																																																																		
6.3V, 4V																																																																																																		

8. RELIABILITY TEST CONDITIONS AND REQUIREMENTS



No.	Item	Test Condition	Requirements																																																																																											
11.	Humidity (Damp Heat) Load	* Test temp. : 40±2°C. * Humidity : 90~95%RH. * Test time : 500 +24/-0hrs. * To apply voltage : Rated voltage (500V max.). * Measurement to be made after keeping at room temp. for 48±4 hrs (Class II).	* No remarkable damage. * Cap. change : C0G : Within ±7.5% or ±0.75pF, whichever is larger. X7R, X5R : Within ±12.5% for ≥10V**, within ±25% for 6.3V. **10V : Within ±25% for 0603≥4.7μF, 0402≥1μF, 0201≥0.1μF. Y5V : Within ±30% for ≥10V, within +30/-40% for 6.3V. * Q for C0G : Cap.≥30pF, Q≥200; Cap.<30pF, Q≥100+10/3C. * D.F. for X7R, X5R <table border="1"> <thead> <tr> <th>Rated</th> <th>D.F.≤</th> <th colspan="2">Exception of D.F.≤</th> </tr> </thead> <tbody> <tr> <td rowspan="3">50V</td> <td rowspan="3">≤3%</td> <td>≤6%</td> <td>0201(50V), 0603≥0.047μF, 0805≥0.18μF, 1206≥0.47μF</td> </tr> <tr> <td>≤10%</td> <td>0201≥0.01μF, 1210≥4.7μF</td> </tr> <tr> <td>≤20%</td> <td>0402≥0.1μF, 0603>0.1μF, 0805≥1μF, 1206≥2.2μF, 1210≥10μF</td> </tr> <tr> <td>35V</td> <td>≤5%</td> <td>≤20%</td> <td>0603≥1μF, 0805≥2.2μF, 1206≥2.2μF, 1210≥10μF</td> </tr> <tr> <td rowspan="3">25V</td> <td rowspan="3">≤5%</td> <td>≤10%</td> <td>0201≥0.01μF, 0805≥1μF, 1210≥10μF</td> </tr> <tr> <td>≤14%</td> <td>0603≥0.33μF, 1206≥4.7μF</td> </tr> <tr> <td>≤15%</td> <td>0201≥0.1μF, 0402≥0.10μF, 0603≥0.47μF, 0805≥2.2μF, 1206≥6.8μF, 1210≥22μF</td> </tr> <tr> <td rowspan="2">16V</td> <td rowspan="2">≤5%</td> <td>≤20%</td> <td>0402≥0.47μF</td> </tr> <tr> <td>≤10%</td> <td>0201≥0.01μF, 0402≥0.033μF, 0603≥0.15μF, 0805≥0.68μF, 1206≥2.2μF, 1210≥4.7μF</td> </tr> <tr> <td rowspan="2">10V</td> <td rowspan="2">≤7.5%</td> <td>≤15%</td> <td>0201≥0.1μF(0201/X7R≥0.022μF), 0402≥0.22μF, 0603≥0.68μF, 0805≥2.2μF, 1206≥4.7μF, 1210≥22μF</td> </tr> <tr> <td>≤20%</td> <td>0201≥0.012μF, 0402≥0.33μF(0402/X7R≥0.22μF), 0603≥0.33μF, 0805≥2.2μF, 1206≥2.2μF, 1210≥22μF</td> </tr> <tr> <td>6.3V</td> <td>≤15%</td> <td>≤30%</td> <td>0201≥0.1μF, 0402≥1μF, 0603≥10μF, 0805≥4.7μF, 1206≥47μF, 1210≥100μF</td> </tr> <tr> <td>4V</td> <td>≤20%</td> <td>---</td> <td>---</td> </tr> </tbody> </table> * D.F. for Y5V <table border="1"> <thead> <tr> <th>Rated</th> <th>D.F.≤</th> <th colspan="2">Exception of D.F.≤</th> </tr> </thead> <tbody> <tr> <td rowspan="2">≥50V</td> <td rowspan="2">≤7.5%</td> <td>≤10%</td> <td>0603≥0.1μF, 0805≥0.47μF, 1206≥4.7μF</td> </tr> <tr> <td>≤20%</td> <td>1210≥6.8μF</td> </tr> <tr> <td>35V</td> <td>≤10%</td> <td>---</td> <td>---</td> </tr> <tr> <td rowspan="2">25V</td> <td rowspan="2">≤7.5%</td> <td>≤10%</td> <td>0402≥0.047μF, 0603≥0.1μF, 0805≥0.33μF, 1206≥1μF, 1210≥4.7μF</td> </tr> <tr> <td>≤15%</td> <td>0402≥0.068μF, 0603≥0.47μF, 1206≥4.7μF, 1210≥22μF</td> </tr> <tr> <td>16V (C<1.0μF)</td> <td>≤10%</td> <td>≤12.5%</td> <td>0402≥0.068μF, 0603≥0.68μF</td> </tr> <tr> <td rowspan="2">16V (C≥1.0μF)</td> <td rowspan="2">≤12.5%</td> <td>≤20%</td> <td>0402≥0.22μF</td> </tr> <tr> <td>≤30%</td> <td>0603≥2.2μF, 0805≥3.3μF, 1206≥10μF, 1210≥22μF</td> </tr> <tr> <td>10V</td> <td>≤20%</td> <td>≤30%</td> <td>0402≥0.47μF</td> </tr> <tr> <td>6.3V</td> <td>≤30%</td> <td>---</td> <td>---</td> </tr> </tbody> </table> * I.R. : ≥10V, ≥500MΩ or RxC≥25Ω-F, whichever is smaller. Class II (X7R, X5R, Y5V) <table border="1"> <thead> <tr> <th>Rated voltage</th> <th>I.R.</th> </tr> </thead> <tbody> <tr> <td>50V : 0402>0.01μF, 0603≥1μF, 0805≥1μF, 1206≥4.7μF, 1210≥4.7μF</td> <td rowspan="6">≥500MΩ or RxC≥5Ω-F, whichever is smaller</td> </tr> <tr> <td>35V : 0603≥1μF, 0805≥2.2μF, 1206≥2.2μF, 1210≥10μF</td> </tr> <tr> <td>25V : 0201≥0.1μF, 0402≥0.22μF, 0603≥2.2μF, 0805≥2.2μF, 1206≥10μF, 1210≥10μF</td> </tr> <tr> <td>16V : 0201≥0.1μF, 0402≥0.22μF, 0603≥1μF, 0805≥2.2μF, 1206≥10μF, 1210≥47μF</td> </tr> <tr> <td>10V : 0201≥47nF, 0402≥0.47μF, 0603≥0.47μF, 0805≥2.2μF, 1206≥4.7μF, 1210≥47μF</td> </tr> <tr> <td>6.3V, 4V</td> </tr> </tbody> </table>	Rated	D.F.≤	Exception of D.F.≤		50V	≤3%	≤6%	0201(50V), 0603≥0.047μF, 0805≥0.18μF, 1206≥0.47μF	≤10%	0201≥0.01μF, 1210≥4.7μF	≤20%	0402≥0.1μF, 0603>0.1μF, 0805≥1μF, 1206≥2.2μF, 1210≥10μF	35V	≤5%	≤20%	0603≥1μF, 0805≥2.2μF, 1206≥2.2μF, 1210≥10μF	25V	≤5%	≤10%	0201≥0.01μF, 0805≥1μF, 1210≥10μF	≤14%	0603≥0.33μF, 1206≥4.7μF	≤15%	0201≥0.1μF, 0402≥0.10μF, 0603≥0.47μF, 0805≥2.2μF, 1206≥6.8μF, 1210≥22μF	16V	≤5%	≤20%	0402≥0.47μF	≤10%	0201≥0.01μF, 0402≥0.033μF, 0603≥0.15μF, 0805≥0.68μF, 1206≥2.2μF, 1210≥4.7μF	10V	≤7.5%	≤15%	0201≥0.1μF(0201/X7R≥0.022μF), 0402≥0.22μF, 0603≥0.68μF, 0805≥2.2μF, 1206≥4.7μF, 1210≥22μF	≤20%	0201≥0.012μF, 0402≥0.33μF(0402/X7R≥0.22μF), 0603≥0.33μF, 0805≥2.2μF, 1206≥2.2μF, 1210≥22μF	6.3V	≤15%	≤30%	0201≥0.1μF, 0402≥1μF, 0603≥10μF, 0805≥4.7μF, 1206≥47μF, 1210≥100μF	4V	≤20%	---	---	Rated	D.F.≤	Exception of D.F.≤		≥50V	≤7.5%	≤10%	0603≥0.1μF, 0805≥0.47μF, 1206≥4.7μF	≤20%	1210≥6.8μF	35V	≤10%	---	---	25V	≤7.5%	≤10%	0402≥0.047μF, 0603≥0.1μF, 0805≥0.33μF, 1206≥1μF, 1210≥4.7μF	≤15%	0402≥0.068μF, 0603≥0.47μF, 1206≥4.7μF, 1210≥22μF	16V (C<1.0μF)	≤10%	≤12.5%	0402≥0.068μF, 0603≥0.68μF	16V (C≥1.0μF)	≤12.5%	≤20%	0402≥0.22μF	≤30%	0603≥2.2μF, 0805≥3.3μF, 1206≥10μF, 1210≥22μF	10V	≤20%	≤30%	0402≥0.47μF	6.3V	≤30%	---	---	Rated voltage	I.R.	50V : 0402>0.01μF, 0603≥1μF, 0805≥1μF, 1206≥4.7μF, 1210≥4.7μF	≥500MΩ or RxC≥5Ω-F, whichever is smaller	35V : 0603≥1μF, 0805≥2.2μF, 1206≥2.2μF, 1210≥10μF	25V : 0201≥0.1μF, 0402≥0.22μF, 0603≥2.2μF, 0805≥2.2μF, 1206≥10μF, 1210≥10μF	16V : 0201≥0.1μF, 0402≥0.22μF, 0603≥1μF, 0805≥2.2μF, 1206≥10μF, 1210≥47μF	10V : 0201≥47nF, 0402≥0.47μF, 0603≥0.47μF, 0805≥2.2μF, 1206≥4.7μF, 1210≥47μF	6.3V, 4V
Rated	D.F.≤	Exception of D.F.≤																																																																																												
50V	≤3%	≤6%	0201(50V), 0603≥0.047μF, 0805≥0.18μF, 1206≥0.47μF																																																																																											
		≤10%	0201≥0.01μF, 1210≥4.7μF																																																																																											
		≤20%	0402≥0.1μF, 0603>0.1μF, 0805≥1μF, 1206≥2.2μF, 1210≥10μF																																																																																											
35V	≤5%	≤20%	0603≥1μF, 0805≥2.2μF, 1206≥2.2μF, 1210≥10μF																																																																																											
25V	≤5%	≤10%	0201≥0.01μF, 0805≥1μF, 1210≥10μF																																																																																											
		≤14%	0603≥0.33μF, 1206≥4.7μF																																																																																											
		≤15%	0201≥0.1μF, 0402≥0.10μF, 0603≥0.47μF, 0805≥2.2μF, 1206≥6.8μF, 1210≥22μF																																																																																											
16V	≤5%	≤20%	0402≥0.47μF																																																																																											
		≤10%	0201≥0.01μF, 0402≥0.033μF, 0603≥0.15μF, 0805≥0.68μF, 1206≥2.2μF, 1210≥4.7μF																																																																																											
10V	≤7.5%	≤15%	0201≥0.1μF(0201/X7R≥0.022μF), 0402≥0.22μF, 0603≥0.68μF, 0805≥2.2μF, 1206≥4.7μF, 1210≥22μF																																																																																											
		≤20%	0201≥0.012μF, 0402≥0.33μF(0402/X7R≥0.22μF), 0603≥0.33μF, 0805≥2.2μF, 1206≥2.2μF, 1210≥22μF																																																																																											
6.3V	≤15%	≤30%	0201≥0.1μF, 0402≥1μF, 0603≥10μF, 0805≥4.7μF, 1206≥47μF, 1210≥100μF																																																																																											
4V	≤20%	---	---																																																																																											
Rated	D.F.≤	Exception of D.F.≤																																																																																												
≥50V	≤7.5%	≤10%	0603≥0.1μF, 0805≥0.47μF, 1206≥4.7μF																																																																																											
		≤20%	1210≥6.8μF																																																																																											
35V	≤10%	---	---																																																																																											
25V	≤7.5%	≤10%	0402≥0.047μF, 0603≥0.1μF, 0805≥0.33μF, 1206≥1μF, 1210≥4.7μF																																																																																											
		≤15%	0402≥0.068μF, 0603≥0.47μF, 1206≥4.7μF, 1210≥22μF																																																																																											
16V (C<1.0μF)	≤10%	≤12.5%	0402≥0.068μF, 0603≥0.68μF																																																																																											
16V (C≥1.0μF)	≤12.5%	≤20%	0402≥0.22μF																																																																																											
		≤30%	0603≥2.2μF, 0805≥3.3μF, 1206≥10μF, 1210≥22μF																																																																																											
10V	≤20%	≤30%	0402≥0.47μF																																																																																											
6.3V	≤30%	---	---																																																																																											
Rated voltage	I.R.																																																																																													
50V : 0402>0.01μF, 0603≥1μF, 0805≥1μF, 1206≥4.7μF, 1210≥4.7μF	≥500MΩ or RxC≥5Ω-F, whichever is smaller																																																																																													
35V : 0603≥1μF, 0805≥2.2μF, 1206≥2.2μF, 1210≥10μF																																																																																														
25V : 0201≥0.1μF, 0402≥0.22μF, 0603≥2.2μF, 0805≥2.2μF, 1206≥10μF, 1210≥10μF																																																																																														
16V : 0201≥0.1μF, 0402≥0.22μF, 0603≥1μF, 0805≥2.2μF, 1206≥10μF, 1210≥47μF																																																																																														
10V : 0201≥47nF, 0402≥0.47μF, 0603≥0.47μF, 0805≥2.2μF, 1206≥4.7μF, 1210≥47μF																																																																																														
6.3V, 4V																																																																																														

8. RELIABILITY TEST CONDITIONS AND REQUIREMENTS

No.	Item	Test Condition	Requirements																																																																																																																																																													
12.	High Temperature Load (Endurance)	<p>* Test temp. : C0G, X7R : 125±3°C. X5R, Y5V : 85±3°C.</p> <p>* To apply voltage : (1) ≤6.3V or Cap.≥10μF : 150% of rated voltage. (2) 10V≤Ur≤50V : 200% of rated voltage. (3) 100% of rated voltage for below range :</p> <table border="1"> <thead> <tr> <th>Size</th> <th>Dielectric</th> <th>Rated</th> <th>Capacitance range</th> </tr> </thead> <tbody> <tr> <td rowspan="2">0201</td> <td rowspan="2">X5R/X7R</td> <td>≤10V</td> <td>C≥0.1μF</td> </tr> <tr> <td>≥16V</td> <td>C>0.1μF</td> </tr> <tr> <td>0402</td> <td>X5R/X7R/Y5V</td> <td>6.3V, 10V, 16V,</td> <td>C≥1.0μF</td> </tr> <tr> <td rowspan="3">0603</td> <td rowspan="3">X5R/X7R</td> <td>4V</td> <td>C≥22μF</td> </tr> <tr> <td>6.3V,10V</td> <td>C≥4.7μF</td> </tr> <tr> <td>25V, 35V</td> <td>C≥1.0μF</td> </tr> <tr> <td rowspan="2">0805</td> <td rowspan="2">X5R/X7R</td> <td>4V</td> <td>C≥47μF</td> </tr> <tr> <td>6.3V</td> <td>C≥22μF</td> </tr> <tr> <td>1206</td> <td>X5R/X7R</td> <td>10V~50V</td> <td>C≥10μF</td> </tr> <tr> <td>1210</td> <td>X5R/X7R</td> <td>≤6.3V</td> <td>C≥47μF</td> </tr> <tr> <td></td> <td></td> <td>16V</td> <td>C≥47μF</td> </tr> </tbody> </table> <p>(4) 150% of rated voltage for below range :</p> <table border="1"> <thead> <tr> <th>Size</th> <th>Dielectric</th> <th>Rated Voltage</th> <th>Capacitance</th> </tr> </thead> <tbody> <tr> <td rowspan="2">0201</td> <td>X5R/X7R</td> <td>16V/25V</td> <td>C≥0.1μF</td> </tr> <tr> <td>X7R</td> <td>16V</td> <td>C≥0.022μF</td> </tr> <tr> <td rowspan="2">0402</td> <td>X5R/X7R</td> <td>50V</td> <td>C≥0.1μF</td> </tr> <tr> <td>Y5V</td> <td>10~25V</td> <td>C≥0.22μF</td> </tr> <tr> <td rowspan="2">0603</td> <td>X7R</td> <td>16V</td> <td>C≥0.47μF</td> </tr> <tr> <td>X5R/X7R</td> <td>50V</td> <td>C>0.1μF</td> </tr> <tr> <td rowspan="2">0805</td> <td>X5R/X7R</td> <td>10V,16V, 50V</td> <td>C≥1.0μF</td> </tr> <tr> <td>Y5V</td> <td>16V</td> <td>C≥2.2μF</td> </tr> <tr> <td rowspan="2">1206</td> <td>X5R/X7R</td> <td>10~50V</td> <td>C≥4.7μF</td> </tr> <tr> <td>X5R/X7R</td> <td>50V</td> <td>C≥2.2μF</td> </tr> <tr> <td>1210</td> <td>X5R/X7R</td> <td>Y5V</td> <td>C≥4.7μF</td> </tr> <tr> <td></td> <td></td> <td>50V</td> <td>C>1.0μF</td> </tr> <tr> <td></td> <td></td> <td>50V</td> <td>C≥1.0μF</td> </tr> </tbody> </table> <p>* Test time : 1000 +24/-0 hrs. * Before initial measurement (Class II only) : To apply de-aging at 150°C for 1hr then set for 24±2 hrs at room temp. * Cap./D.F./I.R. measurement to be made after de-aging at 150°C for 1hr then set for 24±2 hrs at room temp. ** De-rating conditions :</p>	Size	Dielectric	Rated	Capacitance range	0201	X5R/X7R	≤10V	C≥0.1μF	≥16V	C>0.1μF	0402	X5R/X7R/Y5V	6.3V, 10V, 16V,	C≥1.0μF	0603	X5R/X7R	4V	C≥22μF	6.3V,10V	C≥4.7μF	25V, 35V	C≥1.0μF	0805	X5R/X7R	4V	C≥47μF	6.3V	C≥22μF	1206	X5R/X7R	10V~50V	C≥10μF	1210	X5R/X7R	≤6.3V	C≥47μF			16V	C≥47μF	Size	Dielectric	Rated Voltage	Capacitance	0201	X5R/X7R	16V/25V	C≥0.1μF	X7R	16V	C≥0.022μF	0402	X5R/X7R	50V	C≥0.1μF	Y5V	10~25V	C≥0.22μF	0603	X7R	16V	C≥0.47μF	X5R/X7R	50V	C>0.1μF	0805	X5R/X7R	10V,16V, 50V	C≥1.0μF	Y5V	16V	C≥2.2μF	1206	X5R/X7R	10~50V	C≥4.7μF	X5R/X7R	50V	C≥2.2μF	1210	X5R/X7R	Y5V	C≥4.7μF			50V	C>1.0μF			50V	C≥1.0μF	<p>* No remarkable damage. * Cap. change : C0G : Within ±3.0% or ±0.3pF, whichever is larger. X7R, X5R : Within ±12.5% for ≥10V**, within ±25% for ≤6.3V. **10V : Within ±25% for 0603≥4.7μF, 0402≥1μF, 0201≥0.1μF. Y5V : Within ±30% for ≥10V, within +30/-40% for ≤6.3V. * Q for C0G : Cap.>30pF, Q≥350; 10pF≤Cap.≤30pF, Q≥275+2.5C; Cap.<10pF, Q≥200+10C. * D.F. for X7R, X5R</p> <table border="1"> <thead> <tr> <th>Rated</th> <th>D.F.≤</th> <th>Exception of D.F.≤</th> </tr> </thead> <tbody> <tr> <td rowspan="3">50V</td> <td rowspan="3">≤3%</td> <td>≤6% 0201(50V), 0603≥0.047μF, 0805≥0.18μF, 1206≥0.47μF</td> </tr> <tr> <td>≤10% 0201≥0.01uF, 1210≥4.7μF</td> </tr> <tr> <td>≤20% 0402≥0.1μF, 0603>0.1μF, 0805≥1μF, 1206≥2.2μF, 1210≥10μF</td> </tr> <tr> <td>35V</td> <td>≤5%</td> <td>≤20% 0603≥1μF, 0805≥2.2μF, 1206≥2.2μF, 1210≥10μF</td> </tr> <tr> <td rowspan="3">25V</td> <td rowspan="3">≤5%</td> <td>≤10% 0201≥0.01μF, 0805≥1μF, 1210≥10μF</td> </tr> <tr> <td>≤14% 0603≥0.33μF, 1206≥4.7μF</td> </tr> <tr> <td>≤15% 0201≥0.1μF, 0402≥0.10μF, 0603≥0.47μF, 0805≥2.2μF, 1206≥6.8μF, 1210≥22μF</td> </tr> <tr> <td rowspan="2">16V</td> <td rowspan="2">≤5%</td> <td>≤10% 0201≥0.01μF, 0402≥0.033μF, 0603≥0.15μF, 0805≥0.68μF, 1206≥2.2μF, 1210≥4.7μF</td> </tr> <tr> <td>≤15% 0201≥0.1uF(0201/X7R≥0.022μF), 0402≥0.22uF, 0603≥0.68μF, 0805≥2.2μF, 1206≥4.7μF, 1210≥22μF</td> </tr> <tr> <td>10V</td> <td>≤7.5%</td> <td>≤15% 0201≥0.012μF, 0402≥0.33μF(0402/X7R≥0.22μF), 0603≥0.33μF, 0805≥2.2μF, 1206≥2.2μF, 1210≥22μF</td> </tr> <tr> <td>6.3V</td> <td>≤15%</td> <td>≤30% 0201≥0.1μF, 0402≥1μF, 0603≥10μF, 0805≥4.7μF, 1206≥47μF, 1210≥100μF</td> </tr> <tr> <td>4V</td> <td>≤20%</td> <td>---</td> </tr> </tbody> </table> <p>* D.F. for Y5V</p> <table border="1"> <thead> <tr> <th>Rated</th> <th>D.F.≤</th> <th>Exception of D.F.≤</th> </tr> </thead> <tbody> <tr> <td>≥50V</td> <td>≤7.5%</td> <td>≤10% 0603≥0.1μF; 0805≥0.47μF;1206≥4.7μF</td> </tr> <tr> <td rowspan="2">35V</td> <td rowspan="2">≤10%</td> <td>≤20% 1210≥6.8μF</td> </tr> <tr> <td>---</td> </tr> <tr> <td rowspan="3">25V</td> <td rowspan="3">≤7.5%</td> <td>≤10% 0402≥0.047μF;0603≥0.1μF; 0805≥0.33μF;1206≥1μF; 1210≥4.7μF</td> </tr> <tr> <td>≤15% 0402≥0.068μF;0603≥0.47μF; 1206≥4.7μF; 1210≥22μF</td> </tr> <tr> <td>≤12.5% 0402≥0.068μF; 0603≥0.68μF</td> </tr> <tr> <td>16V (C<1.0μF)</td> <td>≤10%</td> <td>≤20% 0402≥0.22μF</td> </tr> <tr> <td>16V (C≥1.0μF)</td> <td>≤12.5%</td> <td>≤20% 0603≥2.2μF; 0805≥3.3μF; 1206≥10μF;1210≥22μF; 1812≥47μF;</td> </tr> <tr> <td>10V</td> <td>≤20%</td> <td>≤30% 0402≥0.47μF</td> </tr> <tr> <td>6.3V</td> <td>≤30%</td> <td>---</td> </tr> </tbody> </table> <p>* I.R. : ≥10V, ≥1GΩ or RxC≥50Ω-F, whichever is smaller. Class II (X7R, X5R, Y5V)</p> <table border="1"> <thead> <tr> <th>Rated voltage</th> <th>I.R.</th> </tr> </thead> <tbody> <tr> <td>50V : 0402>0.01μF, 0603≥1μF, 0805≥1μF, 1206≥4.7μF, 1210≥4.7μF</td> <td rowspan="5">≥1GΩ or RxC≥10Ω-F, whichever is smaller</td> </tr> <tr> <td>35V : 0603≥1μF, 0805≥2.2μF, 1206≥2.2μF, 1210≥10μF</td> </tr> <tr> <td>25V : 0201≥0.1uF, 0402≥0.22μF, 0603≥2.2μF, 0805≥2.2μF, 1206≥10μF, 1210≥10μF</td> </tr> <tr> <td>16V : 0201≥0.1uF, 0402≥0.22μF, 0603≥1μF, 0805≥2.2μF, 1206≥10μF, 1210≥47μF</td> </tr> <tr> <td>10V : 0201≥47nF, 0402≥0.47μF, 0603≥0.47μF, 0805≥2.2μF, 1206≥4.7μF, 1210≥47μF</td> </tr> <tr> <td>6.3V, 4V</td> <td></td> </tr> </tbody> </table>	Rated	D.F.≤	Exception of D.F.≤	50V	≤3%	≤6% 0201(50V), 0603≥0.047μF, 0805≥0.18μF, 1206≥0.47μF	≤10% 0201≥0.01uF, 1210≥4.7μF	≤20% 0402≥0.1μF, 0603>0.1μF, 0805≥1μF, 1206≥2.2μF, 1210≥10μF	35V	≤5%	≤20% 0603≥1μF, 0805≥2.2μF, 1206≥2.2μF, 1210≥10μF	25V	≤5%	≤10% 0201≥0.01μF, 0805≥1μF, 1210≥10μF	≤14% 0603≥0.33μF, 1206≥4.7μF	≤15% 0201≥0.1μF, 0402≥0.10μF, 0603≥0.47μF, 0805≥2.2μF, 1206≥6.8μF, 1210≥22μF	16V	≤5%	≤10% 0201≥0.01μF, 0402≥0.033μF, 0603≥0.15μF, 0805≥0.68μF, 1206≥2.2μF, 1210≥4.7μF	≤15% 0201≥0.1uF(0201/X7R≥0.022μF), 0402≥0.22uF, 0603≥0.68μF, 0805≥2.2μF, 1206≥4.7μF, 1210≥22μF	10V	≤7.5%	≤15% 0201≥0.012μF, 0402≥0.33μF(0402/X7R≥0.22μF), 0603≥0.33μF, 0805≥2.2μF, 1206≥2.2μF, 1210≥22μF	6.3V	≤15%	≤30% 0201≥0.1μF, 0402≥1μF, 0603≥10μF, 0805≥4.7μF, 1206≥47μF, 1210≥100μF	4V	≤20%	---	Rated	D.F.≤	Exception of D.F.≤	≥50V	≤7.5%	≤10% 0603≥0.1μF; 0805≥0.47μF;1206≥4.7μF	35V	≤10%	≤20% 1210≥6.8μF	---	25V	≤7.5%	≤10% 0402≥0.047μF;0603≥0.1μF; 0805≥0.33μF;1206≥1μF; 1210≥4.7μF	≤15% 0402≥0.068μF;0603≥0.47μF; 1206≥4.7μF; 1210≥22μF	≤12.5% 0402≥0.068μF; 0603≥0.68μF	16V (C<1.0μF)	≤10%	≤20% 0402≥0.22μF	16V (C≥1.0μF)	≤12.5%	≤20% 0603≥2.2μF; 0805≥3.3μF; 1206≥10μF;1210≥22μF; 1812≥47μF;	10V	≤20%	≤30% 0402≥0.47μF	6.3V	≤30%	---	Rated voltage	I.R.	50V : 0402>0.01μF, 0603≥1μF, 0805≥1μF, 1206≥4.7μF, 1210≥4.7μF	≥1GΩ or RxC≥10Ω-F, whichever is smaller	35V : 0603≥1μF, 0805≥2.2μF, 1206≥2.2μF, 1210≥10μF	25V : 0201≥0.1uF, 0402≥0.22μF, 0603≥2.2μF, 0805≥2.2μF, 1206≥10μF, 1210≥10μF	16V : 0201≥0.1uF, 0402≥0.22μF, 0603≥1μF, 0805≥2.2μF, 1206≥10μF, 1210≥47μF	10V : 0201≥47nF, 0402≥0.47μF, 0603≥0.47μF, 0805≥2.2μF, 1206≥4.7μF, 1210≥47μF	6.3V, 4V	
Size	Dielectric	Rated	Capacitance range																																																																																																																																																													
0201	X5R/X7R	≤10V	C≥0.1μF																																																																																																																																																													
		≥16V	C>0.1μF																																																																																																																																																													
0402	X5R/X7R/Y5V	6.3V, 10V, 16V,	C≥1.0μF																																																																																																																																																													
0603	X5R/X7R	4V	C≥22μF																																																																																																																																																													
		6.3V,10V	C≥4.7μF																																																																																																																																																													
		25V, 35V	C≥1.0μF																																																																																																																																																													
0805	X5R/X7R	4V	C≥47μF																																																																																																																																																													
		6.3V	C≥22μF																																																																																																																																																													
1206	X5R/X7R	10V~50V	C≥10μF																																																																																																																																																													
1210	X5R/X7R	≤6.3V	C≥47μF																																																																																																																																																													
		16V	C≥47μF																																																																																																																																																													
Size	Dielectric	Rated Voltage	Capacitance																																																																																																																																																													
0201	X5R/X7R	16V/25V	C≥0.1μF																																																																																																																																																													
	X7R	16V	C≥0.022μF																																																																																																																																																													
0402	X5R/X7R	50V	C≥0.1μF																																																																																																																																																													
	Y5V	10~25V	C≥0.22μF																																																																																																																																																													
0603	X7R	16V	C≥0.47μF																																																																																																																																																													
	X5R/X7R	50V	C>0.1μF																																																																																																																																																													
0805	X5R/X7R	10V,16V, 50V	C≥1.0μF																																																																																																																																																													
	Y5V	16V	C≥2.2μF																																																																																																																																																													
1206	X5R/X7R	10~50V	C≥4.7μF																																																																																																																																																													
	X5R/X7R	50V	C≥2.2μF																																																																																																																																																													
1210	X5R/X7R	Y5V	C≥4.7μF																																																																																																																																																													
		50V	C>1.0μF																																																																																																																																																													
		50V	C≥1.0μF																																																																																																																																																													
Rated	D.F.≤	Exception of D.F.≤																																																																																																																																																														
50V	≤3%	≤6% 0201(50V), 0603≥0.047μF, 0805≥0.18μF, 1206≥0.47μF																																																																																																																																																														
		≤10% 0201≥0.01uF, 1210≥4.7μF																																																																																																																																																														
		≤20% 0402≥0.1μF, 0603>0.1μF, 0805≥1μF, 1206≥2.2μF, 1210≥10μF																																																																																																																																																														
35V	≤5%	≤20% 0603≥1μF, 0805≥2.2μF, 1206≥2.2μF, 1210≥10μF																																																																																																																																																														
25V	≤5%	≤10% 0201≥0.01μF, 0805≥1μF, 1210≥10μF																																																																																																																																																														
		≤14% 0603≥0.33μF, 1206≥4.7μF																																																																																																																																																														
		≤15% 0201≥0.1μF, 0402≥0.10μF, 0603≥0.47μF, 0805≥2.2μF, 1206≥6.8μF, 1210≥22μF																																																																																																																																																														
16V	≤5%	≤10% 0201≥0.01μF, 0402≥0.033μF, 0603≥0.15μF, 0805≥0.68μF, 1206≥2.2μF, 1210≥4.7μF																																																																																																																																																														
		≤15% 0201≥0.1uF(0201/X7R≥0.022μF), 0402≥0.22uF, 0603≥0.68μF, 0805≥2.2μF, 1206≥4.7μF, 1210≥22μF																																																																																																																																																														
10V	≤7.5%	≤15% 0201≥0.012μF, 0402≥0.33μF(0402/X7R≥0.22μF), 0603≥0.33μF, 0805≥2.2μF, 1206≥2.2μF, 1210≥22μF																																																																																																																																																														
6.3V	≤15%	≤30% 0201≥0.1μF, 0402≥1μF, 0603≥10μF, 0805≥4.7μF, 1206≥47μF, 1210≥100μF																																																																																																																																																														
4V	≤20%	---																																																																																																																																																														
Rated	D.F.≤	Exception of D.F.≤																																																																																																																																																														
≥50V	≤7.5%	≤10% 0603≥0.1μF; 0805≥0.47μF;1206≥4.7μF																																																																																																																																																														
35V	≤10%	≤20% 1210≥6.8μF																																																																																																																																																														

25V	≤7.5%	≤10% 0402≥0.047μF;0603≥0.1μF; 0805≥0.33μF;1206≥1μF; 1210≥4.7μF																																																																																																																																																														
		≤15% 0402≥0.068μF;0603≥0.47μF; 1206≥4.7μF; 1210≥22μF																																																																																																																																																														
		≤12.5% 0402≥0.068μF; 0603≥0.68μF																																																																																																																																																														
16V (C<1.0μF)	≤10%	≤20% 0402≥0.22μF																																																																																																																																																														
16V (C≥1.0μF)	≤12.5%	≤20% 0603≥2.2μF; 0805≥3.3μF; 1206≥10μF;1210≥22μF; 1812≥47μF;																																																																																																																																																														
10V	≤20%	≤30% 0402≥0.47μF																																																																																																																																																														
6.3V	≤30%	---																																																																																																																																																														
Rated voltage	I.R.																																																																																																																																																															
50V : 0402>0.01μF, 0603≥1μF, 0805≥1μF, 1206≥4.7μF, 1210≥4.7μF	≥1GΩ or RxC≥10Ω-F, whichever is smaller																																																																																																																																																															
35V : 0603≥1μF, 0805≥2.2μF, 1206≥2.2μF, 1210≥10μF																																																																																																																																																																
25V : 0201≥0.1uF, 0402≥0.22μF, 0603≥2.2μF, 0805≥2.2μF, 1206≥10μF, 1210≥10μF																																																																																																																																																																
16V : 0201≥0.1uF, 0402≥0.22μF, 0603≥1μF, 0805≥2.2μF, 1206≥10μF, 1210≥47μF																																																																																																																																																																
10V : 0201≥47nF, 0402≥0.47μF, 0603≥0.47μF, 0805≥2.2μF, 1206≥4.7μF, 1210≥47μF																																																																																																																																																																
6.3V, 4V																																																																																																																																																																

8. RELIABILITY TEST CONDITIONS AND REQUIREMENTS

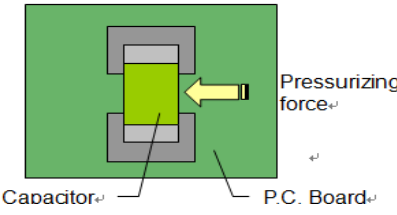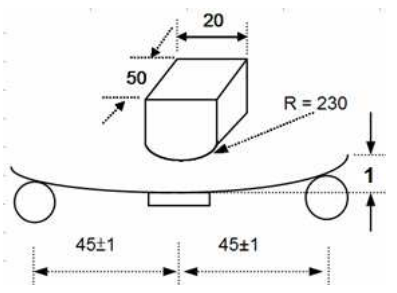
No.	Item	Test Condition	Requirements								
13.	Adhesive Strength of Termination	<p>* Capacitors mounted on a substrate. A force of 2N(0201) or 5N(0402~0603) or 10N(>0603) applied perpendicular to the place of substrate and parallel the line joining the center of terminations for 10±1 second.</p>  <p>Capacitor P.C. Board</p>	<p>* No remarkable damage or removal of the terminations.</p>								
14.	Bending Test	<p>* The middle part of substrate shall be pressurized by means of the pressurizing rod at a rate of about 1mm per second until the deflection becomes 1mm.</p>  <p>Unit : mm</p>	<p>* No remarkable damage.</p> <table border="1"> <thead> <tr> <th>Dielectric</th> <th>Cap. Change</th> </tr> </thead> <tbody> <tr> <td>Class I (C0G)</td> <td>Within ±5.0% or ±0.5pF, whichever is larger</td> </tr> <tr> <td>Class II (X7R, X5R)</td> <td>Within ±12.5%</td> </tr> <tr> <td>Class II (Y5V)</td> <td>Within ±30%</td> </tr> </tbody> </table> <p>(This capacitance change means the change of capacitance under specified flexure of substrate from the capacitance measured before the test)</p>	Dielectric	Cap. Change	Class I (C0G)	Within ±5.0% or ±0.5pF, whichever is larger	Class II (X7R, X5R)	Within ±12.5%	Class II (Y5V)	Within ±30%
Dielectric	Cap. Change										
Class I (C0G)	Within ±5.0% or ±0.5pF, whichever is larger										
Class II (X7R, X5R)	Within ±12.5%										
Class II (Y5V)	Within ±30%										
15.	Vibration Resistance	<p>* Vibration frequency : 10~55 Hz/min. * Total amplitude : 1.5mm. * Test time : 6 hrs. (Two hrs each in three mutually perpendicular directions)</p>	<p>* No remarkable damage. * Cap. change and D.F. : To meet initial spec.</p>								

9. PACKAGE DIMENSION AND QUANTITY

Size	Thickness (mm)	Paper tape		Plastic tape	
		7" reel	13" reel	7" reel	13" reel
0201(0603)	0.30±0.03	15k	70k	-	-
	0.30±0.05	15k	-	-	-
	0.30±0.09	15k	-	-	-
0402(1005)	0.50±0.05	10k	50k	-	-
	0.50 +0.02/-0.05	10k	50k	-	-
	0.50±0.20	10k	-	-	-
0603(1608)	0.50±0.10	4k	-	-	-
	0.80±0.07	4k	15k	-	-
	0.80 +0.15/-0.10	4k	15k	-	-
0805(2012)	0.50±0.10	4k	15k	-	-
	0.60±0.10	4k	15k	-	-
	0.80±0.10	4k	15k	-	-
	0.85±0.10	4k	15k	-	-
	1.25±0.10	-	-	3k	10k
1206(3216)	1.25±0.20	-	-	3k	10k
	0.80±0.10	4k	15k	-	-
	0.85±0.10	4k	15k	-	-
	0.95±0.10	-	-	3k	10k
	1.15±0.15	-	-	3k	10k
	1.25±0.10	-	-	3k	10k
	1.60±0.20	-	-	2k	10k
1.60 +0.30/-0.10	-	-	2k	9k	
1210(3225)	0.85±0.10	-	-	3k	10k
	0.95±0.10	-	-	3k	10k
	1.25±0.10	-	-	3k	10k
	1.60±0.20	-	-	2k	-
	2.00±0.20	-	-	1k	6k
1808(4520)	2.50±0.30	-	-	1k	6k
	1.25±0.10	-	-	2k	10k
	1.60±0.20	-	-	2k	8k
1812(4532)	2.00±0.20	-	-	1k	6k
	1.25±0.10	-	-	1k	5k
	1.60±0.20	-	-	1k	-
	2.00±0.20	-	-	1k	-
1825(4563)	2.50±0.30	-	-	0.5k	3k
	2.80±0.30	-	-	0.5k	-
	1.60±0.20	-	-	1k	-
	2.00±0.20	-	-	1k	-
2220(5750)	2.50±0.30	-	-	0.5k	-
	2.80±0.30	-	-	0.5k	-
	1.60±0.20	-	-	1k	-
2225(5763)	2.00±0.20	-	-	1k	-
	2.50±0.30	-	-	0.5k	-
	2.80±0.30	-	-	0.5k	-

Unit : pcs

9. PACKAGE DIMENSION AND QUANTITY

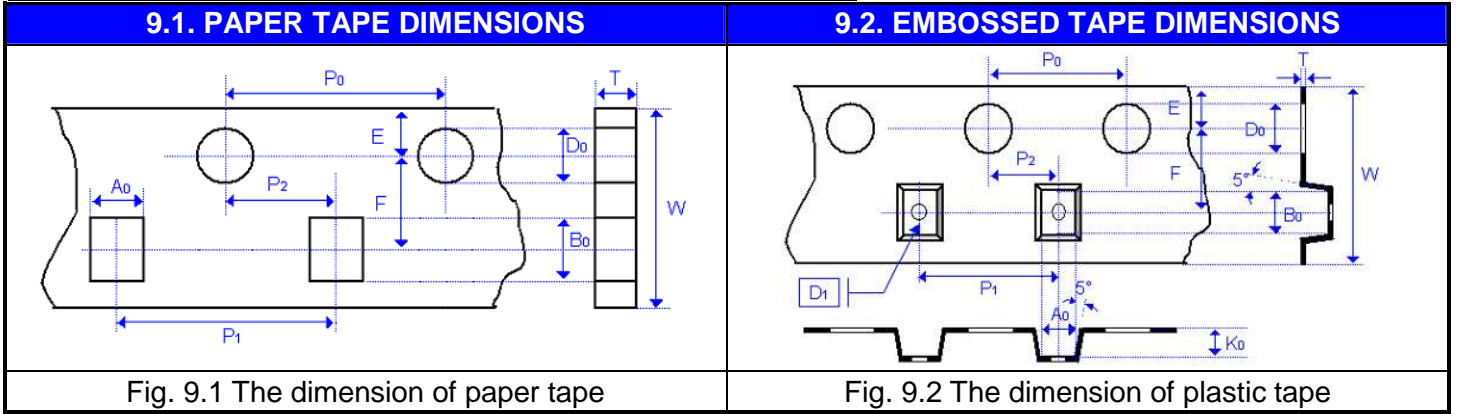

Size	0201	0402	0603		0805	
Chip Thickness	0.30±0.03	0.50±0.05 0.50±0.10	0.80±0.07	0.80 +0.15/-0.1	0.80±0.10	1.25±0.10 1.25±0.20
A ₀	0.39±0.07	0.70±0.2	1.00 +0.05/-0.1	1.02 +0.05/-0.1	1.50±0.10	<1.65
B ₀	0.69±0.07	1.20±0.2	1.80±0.10	1.80±0.10	2.30±0.10	<2.40
T	≤0.50	≤0.80	0.95±0.05	0.97±0.05	0.95±0.05	0.23±0.05
K ₀	-	-	-	-	-	<2.50
W	8.00±0.10	8.00±0.10	8.00±0.10	8.00±0.10	8.00±0.10	8.00±0.10
P ₀	4.00±0.10	4.00±0.10	4.00±0.10	4.00±0.10	4.00±0.10	4.00±0.10
10xP ₀	40.00±0.10	40.00±0.10	40.00±0.2	40.00±0.2	40.00±0.2	40.00±0.20
P ₁	2.00±0.05	2.00±0.05	4.00±0.10	4.00±0.10	4.00±0.10	4.00±0.10
P ₂	2.00±0.05	2.00±0.05	2.00±0.05	2.00±0.05	2.00±0.05	2.00±0.05
D ₀	1.55±0.05	1.55±0.05	1.55±0.05	1.55±0.05	1.55±0.05	1.50 +0.10/-0
D ₁	-	-	-	-	-	1.00±0.10
E	1.75±0.05	1.75±0.05	1.75±0.05	1.75±0.05	1.75±0.05	1.75±0.10
F	3.50±0.05	3.50±0.05	3.50±0.05	3.50±0.05	3.50±0.05	3.50±0.05
Unit :	mm	mm	mm	mm	mm	mm

Size	1206			1210		1812	
Chip Thickness	0.80±0.10	0.95±0.10 1.25±0.10	1.60±0.20 1.60±0.3/-0/1	0.95±0.10 1.25±0.10 1.60±0.20	2.50±0.30	1.25±0.10 1.60±0.20 2.00±0.20	2.50±0.30
A ₀	2.00±0.10	<2.00	<2.00	<3.05	<3.10	<3.90	<3.90
B ₀	3.50±0.10	<3.60	<3.70	<3.80	<4.00	<5.30	<5.30
T	0.95±0.05	0.23±0.05	0.23±0.05	0.23±0.05	0.23±0.05	0.25±0.05	0.25±0.05
K ₀	-	<2.50	<2.50	<2.50	<3.50	<2.50	<3.00
W	8.00±0.10	8.00±0.10	8.00±0.10	8.00±0.10	8.00±0.10	12.0±0.20	12.0±0.20
P ₀	4.00±0.10	4.00±0.10	4.00±0.10	4.00±0.100	4.00±0.10	4.00±0.10	4.00±0.10
10xP ₀	40.00±0.20	40.00±0.20	40.00±0.20	40.00±0.20	40.0±0.10	40.00±0.20	40.00±0.20
P ₁	4.00±0.10	4.00±0.10	4.00±0.10	4.00±0.10	4.00±0.10	8.00±0.10	8.00±0.10
P ₂	2.00±0.05	2.00±0.05	2.00±0.05	2.00±0.05	2.00±0.05	2.00±0.05	2.00±0.05
D ₀	1.55±0.05	1.50 +0.10/-0	1.50 +0.10/-0	1.50 +0.10/-0	1.50 +0.10/-0	1.50 +0.10/-0	1.50 +0.10/-0
D ₁	-	1.00±0.10	1.00±0.10	1.00±0.10	1.00±0.10	1.50±0.10	1.50±0.10
E	1.75±0.10	1.75±0.10	1.75±0.10	1.75±0.10	1.75±0.10	1.75±0.10	1.75±0.1
F	3.50±0.05	3.50±0.05	3.50±0.05	3.50±0.05	3.50±0.05	5.50±0.05	5.50±0.05
Unit :	mm	mm	mm	mm	mm	mm	mm

9. PACKAGE DIMENSION AND QUANTITY

Size	1825		2220		2225	
Chip Thickness	1.60±0.20 2.00±0.20	2.50±0.30	1.40±0.15 1.60±0.20 2.00±0.20	2.50±0.30	1.60±0.20 2.00±0.20	2.50±0.30
A ₀	<6.80	<6.80	<5.80	<5.80	<6.80	<6.80
B ₀	<5.30	<5.30	<6.50	<6.50	<6.50	<6.50
T	0.30±0.10	0.30±0.10	0.30±0.10	0.30±0.10	0.30±0.10	0.30±0.10
K ₀	<2.50	<3.10	<2.50	<3.10	<2.50	<3.10
W	12.0±0.20	12.0±0.20	12.0±0.20	12.0±0.20	12.0±0.20	12.0±0.20
P ₀	4.00±0.10	4.00±0.10	4.00±0.10	4.00±0.10	4.00±0.10	4.00±0.10
10xP ₀	40.00±0.20	40.00±0.20	40.00±0.20	40.00±0.20	40.00±0.20	40.00±0.20
P ₁	8.00±0.10	8.00±0.10	8.00±0.10	8.00±0.10	8.00±0.10	8.00±0.10
P ₂	2.00±0.05	2.00±0.05	2.00±0.05	2.00±0.05	2.00±0.05	2.00±0.05
D ₀	1.50 +0.10/-0	1.50 +0.10/-0	1.50 +0.10/-0	1.50 +0.10/-0	1.50 +0.10/-0	1.50 +0.10/-0
D ₁	1.50±0.10	1.50±0.10	1.50±0.10	1.50±0.10	1.50±0.10	1.50±0.10
E	1.75±0.1	1.75±0.10	1.75±0.1	1.75±0.10	1.75±0.10	1.75±0.10
F	5.50±0.05	5.50±0.05	5.50±0.05	5.50±0.05	5.50±0.05	5.50±0.05
Unit :	mm	mm	mm	mm	mm	mm

9.3. REEL DIMENSIONS

Size	0201, 0402, 0603 0805, 1206, 1210			1808, 1812, 1825 2220, 2225
	7"	7"	13"	7"
Reel size	7"	7"	13"	7"
C	13.0 +0.5/-0.2	13.0 +0.5/-0.2	13.0 +0.5/-0.2	13.0 +0.5/-0.2
W ₁	8.4 +1.5/-0	12.4 +2.0/-0	8.4 +1.5/-0	8.4 +1.5/-0
A	178.0 ±0.10	178.0 ±0.10	330.0 ±1.0	178.0 ±0.10
N	60.0 +1.0/-0	80.0 ±1.0	100 ±1.0	60.0 +1.0/-0

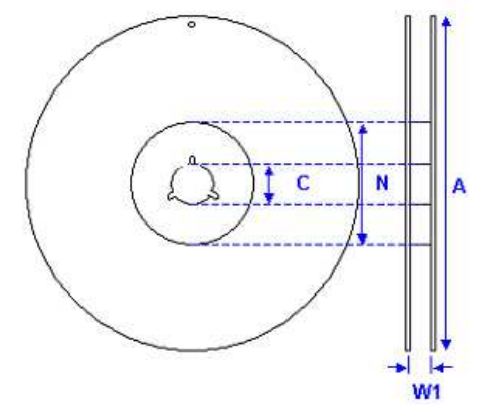


Fig. 9.3 The dimension of reel

10. APPLICATION NOTES

STORAGE

To prevent the damage of solderability of terminations, the following storage conditions are recommended :

Indoors under 5 ~ 40°C and 20% ~ 70% RH.

No harmful gases containing sulfuric acid, ammonia, hydrogen sulfide or chlorine.

Packaging should not be opened until the capacitors are required for use. If opened, the pack should be re-sealed as soon as is practicable. Taped product should be stored out of direct sunlight, which might promote deterioration in tape or adhesion performance. The product is recommended to be used within 12 months after shipment and checked the solderability before use.

HANDLING

Chip capacitors are dense, hard, brittle, and abrasive materials. They are liable to suffer mechanical damage, in the form of cracks or chips. Chip Capacitors should be handled with care to avoid contamination or damage. To use vacuum or plastic tweezers to pick up or plastic tweezers is recommended for manual placement. Tape and reeled packages are suitable for automatic pick and placement machine.


PREHEAT

In order to minimize the risk of thermal shock during soldering, a carefully controlled preheat is required. The rate of preheat should not exceed 3°C per second.

SOLDERING

Use mildly activated rosin RA and RMA fluxes do not use activated flux. The amount of solder in each solder joint should be controlled to prevent the damage of chip capacitors caused by the stress between solder, chips, and substrate.

a.) Hand soldering :

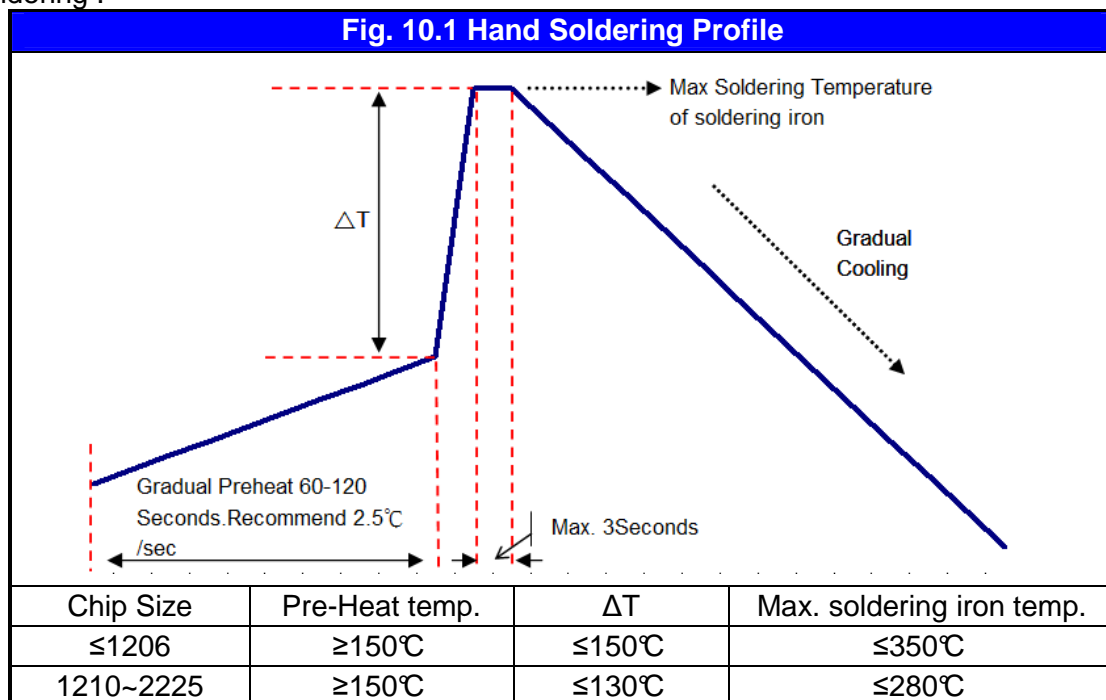

* Soldering iron tip diameter ≤ 1.0 mm and wattage max. 20W.

* The Capacitors shall be pre-heated and that the temperature gradient between the devices and the tip of the soldering iron.

* The required amount of solder shall be melted on the soldering tip.


* The tip of iron should not contact the ceramic body directly.

* The Capacitors shall be cooled gradually at room temperature after soldering.


* Forced air cooling is not allowed.

10. APPLICATION NOTES

b.) Reflow soldering :

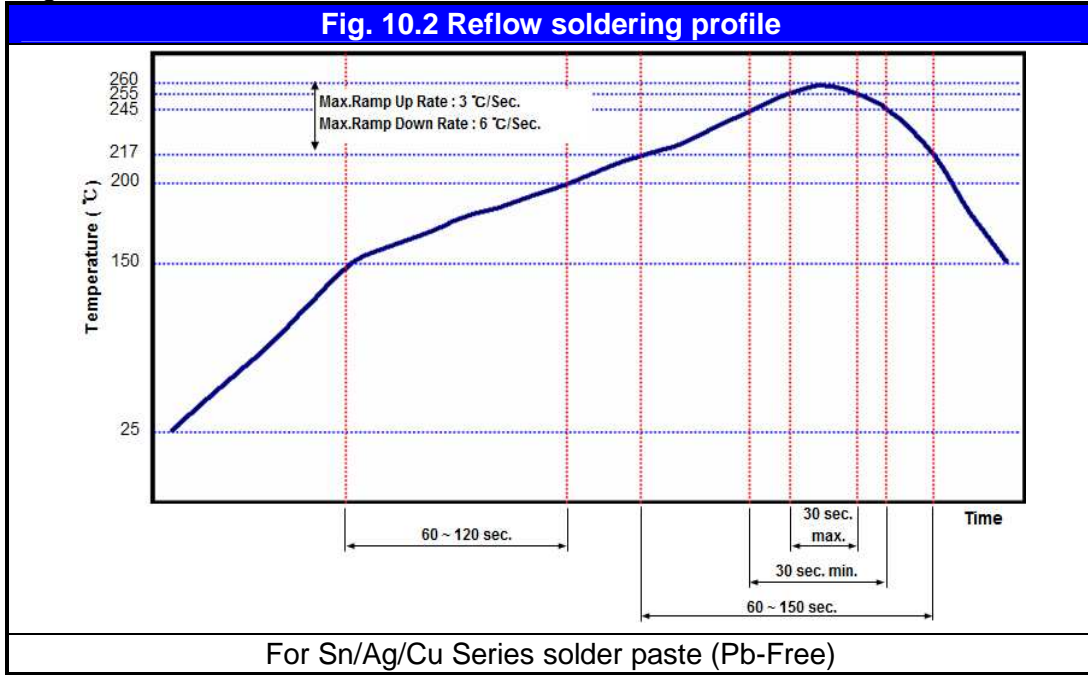

c.) Wave soldering :

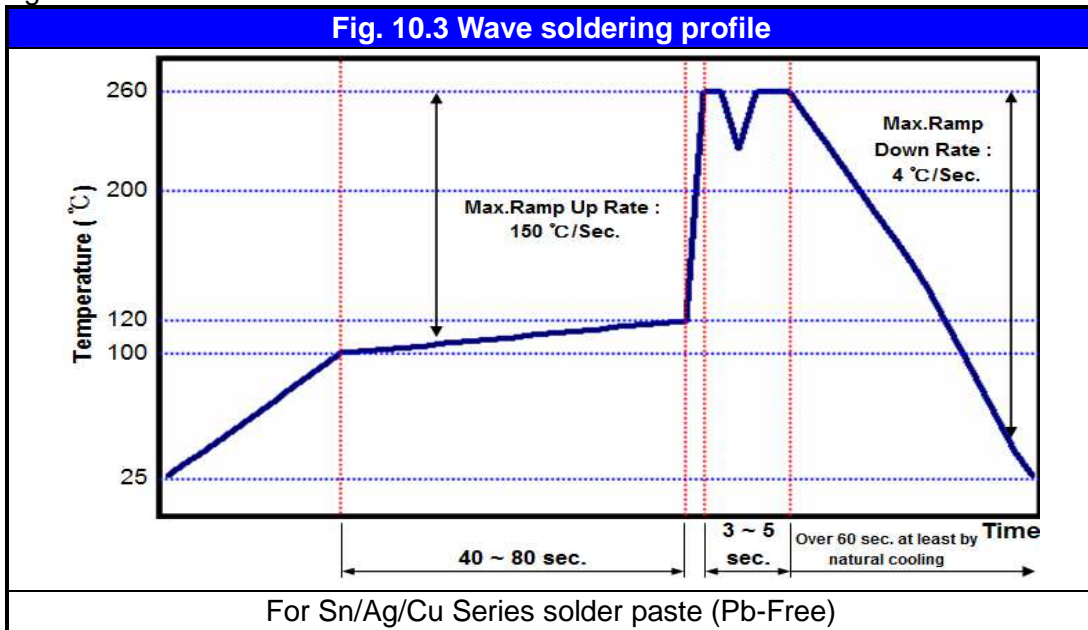

Soldering conditions :

Class I :

Size Inch (mm)	Temper. Cher.	Capacitance	Condition	
			Wave	Reflow
≤0402(1005)	Class I - C0G	All	X	O
0603(1608)	Class I - C0G	All	O	O
0805(2012)	Class I - C0G	All	O	O
1206(3216)	Class I - C0G	All	O	O
≥1210(3225)	Class I - C0G	All	X	O


10. APPLICATION NOTES

Soldering conditions :

Class II :

Size Inch (mm)	Temper. Cher.	Capacitance	Condition	
			Wave	Reflow
≤0402(1005)	Class II - X7R	All	X	O
0603 (1608)	Class II - X7R	Cap. <2.2μF	O	O
		Cap. ≥2.2μF	X	O
0805 (2012)	Class II - X7R	Cap. <4.7μF	O	O
		Cap. ≥4.7μF	X	O
1206 (3216)	Class II - X7R	Cap. <4.7μF	O	O
		Cap. ≥4.7μF	X	O
≥1210 (3225)	Class II - X7R	All	X	O

Soldering height :
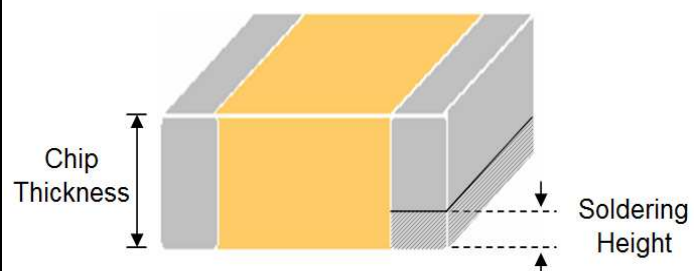
<p>The solder climbing minimum height is suggesting to 25% of chip thickness or 500um whichever is less. (Reference from IPC-610E)</p>	
--	---

COOLING

After soldering, cool the chips and the substrate gradually to room temperature. Natural cooling in air is recommended to minimize stress in the solder joint.

CLEANING

All flux residues must be removed by using suitable electronic-grade vapor-cleaning solvents to eliminate contamination that could cause electrolytic surface corrosion. Good results can be obtained by using ultrasonic cleaning of the solvent. The choice of the proper system is depends upon many factors such as component mix, flux, and solder paste and assembly method. The ability of the cleaning system to remove flux residues and contamination from under the chips is very important.