

信昌電子陶瓷股份有限公司
Prosperity Dielectrics Co., Ltd.

No.566-1, Gaoshi Rd., Lujhu, Yangmei Dist., Taoyuan City 32668, Taiwan, R.O.C.
Tel. : +886-3-4753355 Fax : +886-3-4854959

SPECIFICATION FOR APPROVAL

DATE :

CUSTOMER : _____

PART NAME : _____ Thick Film Automotive Chip Resistors

CUSTOMER'S DWG. NO. : _____

CUSTOMER'S PART NO. : _____

PDC PART NO. : **FWF SERIE APPROVED** _____

DESCRIPTION. : _____

ACTION	"V"	CUSTOMER'S SIGNATURE	NOTE
RESULT			
FULL APPROVED			
CONDITIONAL APPROVED			
REJECTED			

OUR ACTION	SIGNATURE
PREPARED By	<i>Jenny Tseng</i>
CHECKED By	<i>Tony Chou</i>
APPROVED By	<i>Byron Tsai</i>

CUSTOMER SIGNATURE FOR ACCEPTANCE

Contents.

Descriptions	Pages
01. Features	2
02. Applications	2
03. Dimension and construction	2
04. Power Derating Curve	3
05. Rating	3-4
06. Part Number	5
07. Marking / Soldering	5-7
08. Reliability Performance	8-10
09. Packing Information	11-12
10. Storage / Handling	12
©Appendix	13


1. Features

- Meet AEC-Q200 test for Automotive industry.
- Suitable for lead free soldering.
- Compatible with wave and reflow soldering.
- Anti-sulfur products and 100% CCD inspection.
- RoHS compliant & Halogen free.

2. Applications

- Automotive industry.
- Digital meter, Consumer electronics, M/B.
- Portable electronics devices.

3. Dimension and Construction

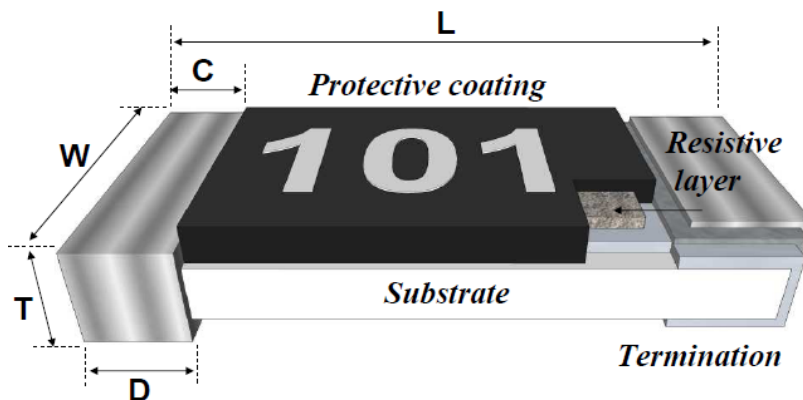


Unit : mm

Type	L	W	C	D	T
FWF02	1.00±0.05	0.50±0.05	0.20±0.10	0.25±0.10	0.35±0.05
FWF03	1.60±0.10	0.80±0.10	0.30±0.20	0.30±0.20	0.45±0.10
FWF05	2.00±0.10	1.25±0.10	0.40±0.20	0.40±0.20	0.50±0.10
FWF06	3.10±0.10	1.60±0.10	0.50±0.25	0.50±0.25	0.55±0.10
FWF12	3.10±0.10	2.60±0.10	0.50±0.25	0.50±0.25	0.55±0.10
FWF20	5.00±0.20	2.50±0.20	0.60±0.25	0.60±0.25	0.60±0.10
FWF25	6.40±0.20	3.20±0.20	0.60±0.25	0.90±0.25	0.60±0.15

4. Power Derating Curve

Operating Temperature Range: -55 to +155°C

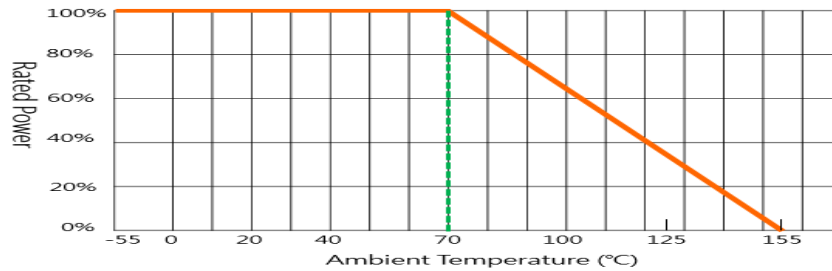

5. Rating

5.1 General Resistance

Type	Size	Power Rating at 70°C	Max. RCWV	Max. Overload Voltage	Resistance Tolerance	Temperature Coefficient (ppm/°C)	Resistance Range		Standard Resistance Values
							Min.	Max.	
02 02-W	0402	1/16W	50V	100V	±1%(F) ±5%(J)	±200	>1MΩ	10MΩ	E-96(F) E-24(J)
		1/10W				±100	>10Ω	1MΩ	
						-200~+400	0 · 1Ω	10Ω	
03 03-W	0603	1/10W	75V	150V	±1%(F) ±5%(J)	±200	>1MΩ	10MΩ	E-96(F) E-24(J)
		1/10W				±100	>10Ω	1MΩ	
						-200~+400	0 · 1Ω	10Ω	
05 05-W	0805	1/8W	150V	300V	±1%(F) ±5%(J)	±200	>1MΩ	10MΩ	E-96(F) E-24(J)
		1/4W				±100	>10Ω	1MΩ	
						-200~+400	0 · 1Ω	10Ω	
06 06-W	1206	1/4W	200V	400V	±1%(F) ±5%(J)	±200	>1MΩ	10MΩ	E-96(F) E-24(J)
		1/4W				±100	>10Ω	1MΩ	
						-200~+400	0 · 1Ω	10Ω	
12 12-W	1210	1/2W	200V	400V	±1%(F) ±5%(J)	±200	>1MΩ	10MΩ	E-96(F) E-24(J)
		1/2W				±100	>10Ω	1MΩ	
						-200~+400	0 · 1Ω	10Ω	

FWF series. (AEC-Q200)
Automotive Grade General Purpose
Thick-film Lead Free Chip Resistors

Type FWF	Size	Power Rating at 70°C	Max. RCWV	Max. Overload Voltage	Resistance Tolerance	Temperature Coefficient (ppm/°C)	Resistance Range		Standard Resistance Values
							Min.	Max.	
20 20-W	2010	3/4W 3/4W	200V	400V	±1%(F) ±5%(J)	±200	>1MΩ	10MΩ	E-96(F) E-24(J)
						±100	>10Ω	1MΩ	
						±200	0 , 1Ω	10Ω	
25 25-W	2512	1W 1W	250V	500V	±1%(F) ±5%(J)	±200	>1MΩ	10MΩ	E-96(F) E-24(J)
						±100	>10Ω	1MΩ	
						±200	0 , 1Ω	10Ω	

5.2 0 Ohm, Jumper

Type FWF	Size	Description	Max. Rated Current	Resistance
02	0402	Zero Ohm , Jumper	≦ 1A	< 50mΩ
03	0603	Zero Ohm , Jumper	≦ 1A	< 50mΩ
05	0805	Zero Ohm , Jumper	≦ 2A	< 50mΩ
06	1206	Zero Ohm , Jumper	≦ 2A	< 50mΩ
12	1210	Zero Ohm , Jumper	≦ 3A	< 50mΩ
20	2010	Zero Ohm , Jumper	≦ 3A	< 50mΩ
25	2512	Zero Ohm , Jumper	≦ 3A	< 50mΩ

Notes:

1. RCWV is Rated Voltage, $V = \sqrt{P * R}$ or Max. Working Voltage whichever is lower.
2. V : Working Voltage(V) , P : Rated Power (W) , R : Resistance Value(Ω)
3. Please consider keep the surface temperature do not exceed 105°C when working.

6.Part Number

Type	Size	Tolerance	Packing	Watt	R Value (GM)	TCR	Special Code
FWF	02 :0402	F :±1%	Paper Tape : 0402.0603. 0805.1206 T : 5Kpcs V : 10Kpcs W : 20Kpcs Plastic Tape : 2010.2512 P : 4Kpcs X : 8Kpcs Y : 16Kpcs	∅: As Rating Info	XXX XXXX 5%: 3 digits 1%: 4 digits	∅: As Rating Info	Null means Standard W : Anti-sulfur H2S 1000ppm
	03 :0603	J :±5%					
	05 :0805						
	06 :1206						
	12 :1210						
	20 :2010						
	25 :2512						

Example :

FWF05FT-1004

→0805 size, tolerance 1%, paper tape, 1/8W, 1 MΩ.

FWF03JT-102

→0603 size, tolerance 5%, paper tape, 1/10W, 1 KΩ.

FWF03FT-1004-W


→0603 size, tolerance 1%, paper tape, 1/10W, 1 MΩ, Special Anti-Sulfur.

7.Marking/Soldering

Resistance value identify :

E24 ±5% : 3 Digits marking to identify the resistance value


0603/0805/1206/2010/2512

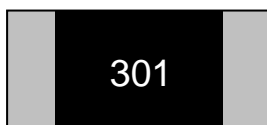

$$301 \rightarrow 30 \times 10^1 = 300 \Omega$$

E24/E96 ±1% : 4 Digits marking to identify the resistance value


0805/1206/2010/2512

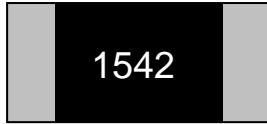

1542 → $154 \times 10^2 = 15.4 \text{ K}\Omega$

E24 ±1% : 3 Digits marking to identify the resistance value


0603

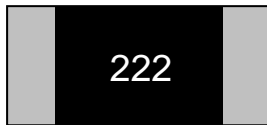

222 → $22 \times 10^2 = 2.2 \text{ K}\Omega$

E96 ±1% : 3 Digits marking to identify the resistance value



0603

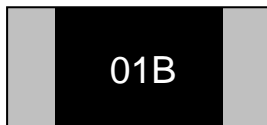


01B → Refer 0603 marking table = 1 KΩ

No marking of 0402 product.

Soldering Reference : Compatible for most industrial soldering request.

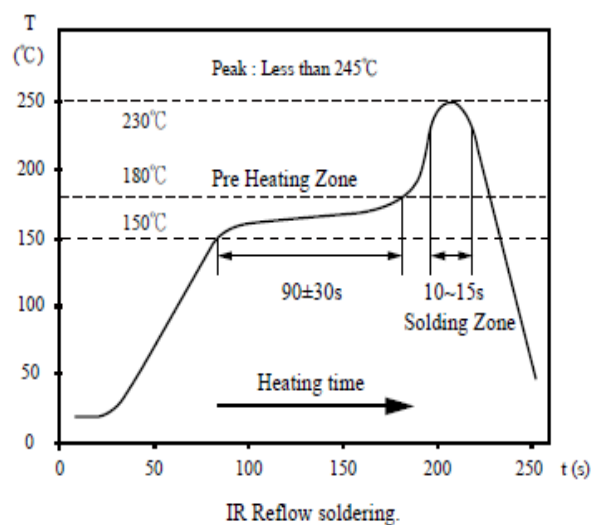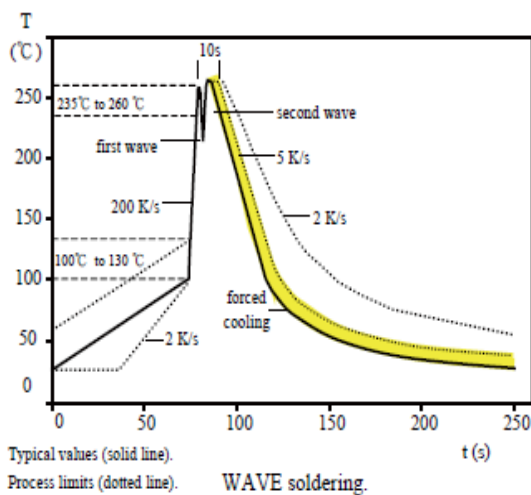


FWF series. (AEC-Q200) Automotive Grade General Purpose Thick-film Lead Free Chip Resistors

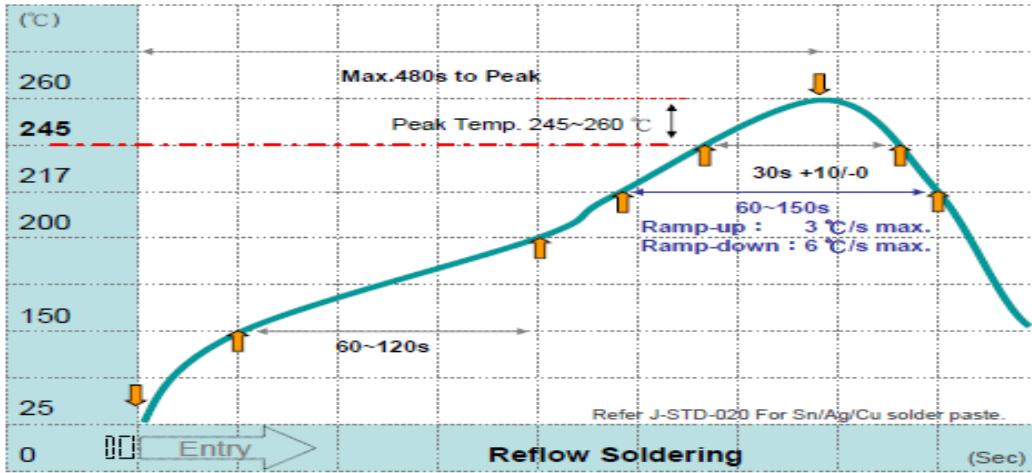

Recommend Solder Pad Dimensions:

Type	W	D	L
FWF02	0.60	0.5	1.50
FWF03	0.90	1.00	3.00
FWF05	1.30	1.15	3.50
FWF06	1.80	1.30	4.70
FWF12	3.00	1.30	4.70
FWF20	3.00	1.50	6.80
FWF25	3.70	1.60	7.60

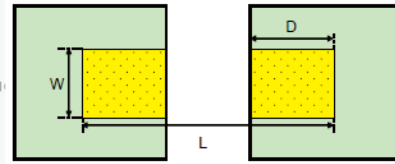

Unit:mm

8. Reliability Performance (AEC-Q200)

Test Item	Specification	Test Method (AEC-Q200. IEC 60115)
DC Resistance	F : $\pm 1\%$; J : $\pm 5\%$	AEC-Q200 TABLE 7.1 IEC 60115-1 / JIS C 5201-1 , Clause 4.5 Measure the resistance Value.
High Temperature Exposure (Storage)	J : $\Delta R \leq \pm(3\%+0.1\Omega)$ F : $\Delta R \leq \pm(1\%+0.05\Omega)$	AEC-Q200 TABLE 7.3 1000 hrs. @ T=125°C. Unpowered. Measurement at 24 \pm 2 hours after test conclusion.
Temperature Cycling	J : $\Delta R \leq \pm(1\%+0.1\Omega)$ F : $\Delta R \leq \pm(0.5\%+0.05\Omega)$ No mechanical damage.	AEC-Q200 TABLE 7.4 1000 Cycles (-55°C to +125°C). Measurement at 24 \pm 4 hours after test conclusion.
Moisture Resistance	J : $\Delta R \leq \pm(1\%+0.1\Omega)$ F : $\Delta R \leq \pm(0.5\%+0.05\Omega)$	AEC-Q200 TABLE 7.6 Test 65°C/80~100%RH/10Cycles. Measurement at 24 \pm 2 hours after test conclusion. (t=24hrs/cycle).
Biased Humidity	J : $\Delta R \leq \pm(3\%+0.1\Omega)$ F : $\Delta R \leq \pm(1\%+0.05\Omega)$	AEC-Q200 TABLE 7.7 1000 hours 85°C/85%RH. 10% of operating power. Measurement at 24 \pm 2 hours after test conclusion.
Operational Life	J : $\Delta R \leq \pm(3\%+0.1\Omega)$ F : $\Delta R \leq \pm(1\%+0.05\Omega)$	AEC-Q200 TABLE 7.8 Test 1000hr @ TA=125°C at specified rated power. Measurement at 24 \pm 2 hours after test conclusion.
External Visual	No visual damage and refer PDC marking code.	AEC-Q200 TABLE 7.9 Inspect device construction, marking and workmanship.
Physical Dimension	Within the spec.	AEC-Q200 TABLE 7.10 Verify physical dimensions to the applicable device detail specification.
Mechanical Shock	Within product specification tolerance and no visible damage.	AEC-Q200 TABLE 7.13 Test Peak value:100g's,Wave:Hail-sine, Duration:6ms,Velocity:12.3ft/sec.

FWF series. (AEC-Q200)
Automotive Grade General Purpose
Thick-film Lead Free Chip Resistors

Vibration	No mechanical damage.	AEC-Q200 TABLE 7.14 5 g's for 20 min., 12 cycles each of 3 orientations. Test from 10-2000 Hz.
Resistance to Solder Heat	J : $\Delta R \leq \pm(1\% + 0.1\Omega)$ F : $\Delta R \leq \pm(0.5\% + 0.05\Omega)$ No mechanical damage.	AEC-Q200 TABLE 7.15 Solder dipping @ 270°C±5°C for 10sec.±1sec.
Thermal Shock	J : $\Delta R \leq \pm(1\% + 0.1\Omega)$ F : $\Delta R \leq \pm(0.5\% + 0.05\Omega)$ No mechanical damage.	AEC-Q200 TABLE 7.16 -55 to 155°C/ dwell time 15min/ Max transfer time 20sec/ 300cycles.
ESD	$\Delta R \leq \pm(1\% + 0.1\Omega)$ No mechanical damage.	AEC-Q200-002 Test contact min. 0.5KV.
Solder Ability	Over 95% of termination must be covered with solder.	AEC-Q200 TABLE 7.18 a) Baking 155°C 4H, dipping 235°C 5s b) Steam 1H, dipping 215°C 5s c) Steam 1H, dipping 260°C 7s
Flammability	Refer UL-94.	AEC-Q200 TABLE 7.20 UL-94 V-0 or V-1 are acceptable
Board Flex	J : $\Delta R \leq \pm(1\% + 0.1\Omega)$ F : $\Delta R \leq \pm(0.5\% + 0.05\Omega)$ No mechanical damage.	AEC-Q200 TABLE 7.21 Bending 2mm 2512.2010.1210.1206, 3mm 0805.0603.0402.
Terminal Strength	No mechanical damage	AEC-Q200 TABLE 7.22 Force 1 Kg for 60 seconds.
Short Time Overload	J : $\Delta R \leq \pm(1\% + 0.1\Omega)$ F : $\Delta R \leq \pm(0.5\% + 0.05\Omega)$	IEC 60115-1, Clause 4.13 2.5 x Rated voltage or Max. overload voltage for 5 seconds
Load Life Humidity	J : $\Delta R \leq \pm(3\% + 0.1\Omega)$ F : $\Delta R \leq \pm(1\% + 0.05\Omega)$	IEC 60115-1, Clause 4.24 40±2°C with relative humidity 90% ~ 95% D.C. rated voltage for 1.5 hours ON 30 minutes OFF. Cycle repeated 1000 hours.

FWF series. (AEC-Q200)
Automotive Grade General Purpose
Thick-film Lead Free Chip Resistors

Temperature Coefficient of Resistance (TCR)	Within the spec.	IEC 60115-1, Clause 4.8 $T_1 \quad T_2$ Test temperature : 25°C~ -55°C 25°C~ +155°C TCR(ppm/°C) = $(R_2-R_1)/R_1 \times 1 / (T_2-T_1) \times 10^6$
Load Life	J : $\Delta R \leq \pm(3\%+0.1\Omega)$ F : $\Delta R \leq \pm(1\%+0.05\Omega)$	IEC 60115-1, Clause 4.25 Rated voltage for 1.5 hours for followed by a pause 0.5 hour at 70±2°C. Cycle repeated 1000 hours.
Insulation Resistance	Between termination and coating must over 1000MΩ	IEC 60115-1, Clause 4.6 Test voltage : 100±15V
Anti-sulfur products require	$\Delta R \leq \pm (1\% + 0.1\Omega)$ No mechanical damage	IEC 60068-2-43/42 H2S : 10-15 ppm · SO2 : 25±5 ppm · 25±2°C RH 75% 240Hrs Specialty : -W · H2S : 1000ppm 720Hrs




9. PACKAGING


9.1 Peel Strength of Top Cover Tape

The peel speed shall be about 300 mm/min

The peel force of top cover tape shall between 0.1 to 0.7N

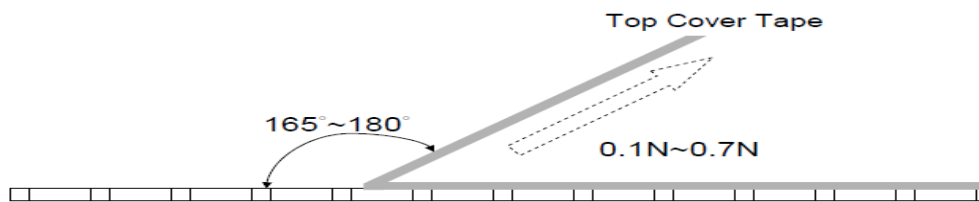


9.2 Tape Packaging Dimensions

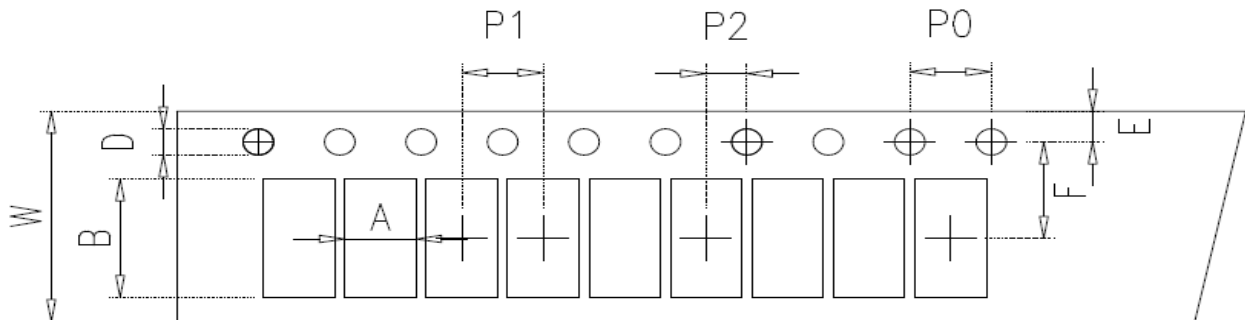

Size	A	B	W	F	E	P1	P2	P0	D
0402	0.70±0.10	1.20±0.10	8.00±0.30	3.50±0.05	1.75±0.10	2.00±0.10	2.00±0.05	4.00±0.10	1.50+0.10/-0
0603	1.10±0.20	1.90±0.20	8.00±0.30	3.50±0.05	1.75±0.10	4.00±0.10	2.00±0.05	4.00±0.10	1.50+0.10/-0
0805	1.65±0.20	2.40±0.20	8.00±0.30	3.50±0.05	1.75±0.10	4.00±0.10	2.00±0.05	4.00±0.10	1.50+0.10/-0
1206	2.00±0.20	3.60±0.20	8.00±0.30	3.50±0.05	1.75±0.10	4.00±0.10	2.00±0.05	4.00±0.10	1.50+0.10/-0
1210	3.00±0.20	3.60±0.20	8.00±0.30	3.50±0.05	1.75±0.10	4.00±0.10	2.00±0.05	4.00±0.10	1.50+0.10/-0
2010	2.80±0.20	5.50±0.20	12.00±0.30	5.50±0.05	1.75±0.10	4.00±0.10	2.00±0.05	4.00±0.10	1.50+0.10/-0
2512	3.50±0.20	6.70±0.20	12.00±0.30	5.50±0.05	1.75±0.10	4.00±0.10	2.00±0.05	4.00±0.10	1.50+0.10/-0

unit : mm

9.3 Reel Dimensions

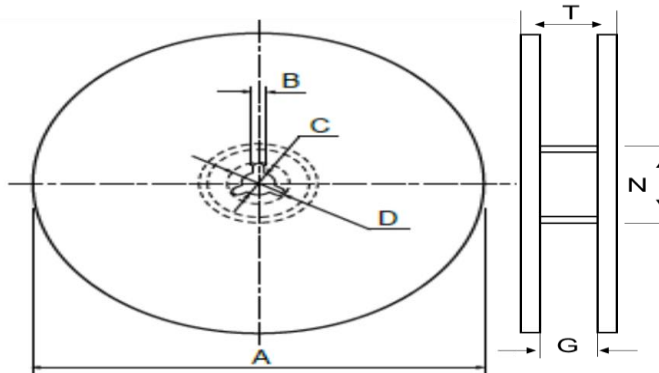

Size	Packaging Q'ty	A	N	C	D	B	G	T
0402	10kpcs/Reel	178.0±2.0	60.0±0.5	13.0±0.5	20(Min.)	2.0±0.5	10.0±1.5	14.9max.
0603	5kpcs/Reel	178.0±2.0	60.0±0.5	13.0±0.5	20(Min.)	2.0±0.5	10.0±1.5	14.9max.
0805	10kpcs/Reel	254.0±2.0	100.0±1.0	13.5±0.5	20(Min.)	2.0±0.5	10.0±1.5	14.9max.
1206								
1210	20kpcs/Reel	330.0±2.0	100.0±1.0	13.5±0.5	20(Min.)	2.0±0.5	10.0±1.5	14.9max.
2010 2512	4kpcs/Reel	178.0±2.0	60.0±0.5	13.0±0.5	20(Min.)	2.0±0.5	13.8±1.5	16.7max.
	8kpcs/Reel	254.0±2.0	100.0±0.5	13.5±0.5	20(Min.)	2.0±0.5	13.8±1.5	20.0max.
	16kpcs/Reel	330.0±2.0	100.0±1.0	13.5±0.5	20(Min.)	2.0±0.5	13.8±1.5	20.0max.

unit:mm

10. Storage & Handling

... Products are recommended to be used up within one year as ensured shelf life.

Check solder ability in case shelf life extension is needed.

... To store products with following condition:

Temperature:5 to 40°C ; Humidity: 20 to 70% relative humidity.

Precaution for use :

The standard AEC-Q200 series resistors are mainly used on general automotive equipment without safety considerations. Please select SAFETY concern type or contact our company in advanced if you intend to use resistor for designing the equipment which may damage itself and the safety of third party. If necessary, please consider to add the protect circuit in devising process and obtaining fully safety evaluation. The contents of the acknowledgments only used for our parent company, marketing subsidiaries and official marketing agents who purchase our products. Not applicable for the other nonofficial channels.

Appendix

■ 0603 1% Marking Table (Table 1)

Code	E48	E96	Code	E48	E96	Code	E48	E96	Code	E48	E96
01	100	100	25	178	178	49	316	316	73	562	562
02		102	26		182	50		324	74		576
03	105	105	27	187	187	51	332	332	75	590	590
04		107	28		191	52		340	76		604
05	110	110	29	196	196	53	348	348	77	619	619
06		113	30		200	54		357	78		634
07	115	115	31	205	205	55	365	365	79	649	649
08		118	32		210	56		374	80		665
09	121	121	33	215	215	57	383	383	81	681	681
10		124	34		221	58		392	82		698
11	127	127	35	226	226	59	402	402	83	715	715
12		130	36		232	60		412	84		732
13	133	133	37	237	237	61	422	422	85	750	750
14		137	38		243	62		432	86		768
15	140	140	39	249	249	63	442	442	87	787	787
16		143	40		255	64		453	88		806
17	147	147	41	261	261	65	464	464	89	825	825
18		150	42		267	66		475	90		845
19	154	154	43	274	274	67	487	487	91	866	866
20		158	44		280	68		499	92		887
21	162	162	45	287	287	69	511	511	93	909	909
22		165	46		294	70		523	94		931
23	169	169	47	301	301	71	536	536	95	953	953
24		174	48		309	72		549	96		976

Code	A	B	C	D	E	F	G	H	X	Y	Z
Multiplier	10 ⁰	10 ¹	10 ²	10 ³	10 ⁴	10 ⁵	10 ⁶	10 ⁷	10 ⁻¹	10 ⁻²	10 ⁻³

※ All product specification and data are subject to change without notice.