

Prosperity Dielectrics Co., Ltd.

No.566-1, Kaoshi Rd., Yangmei, Taoyuan 32668, Taiwan (R.O.C.)

Tel : 886-3-4753355

Fax : 886-3-4854959

Messrs. : 一般共用

Date : 2023/07/26

APPROVAL SHEET

Product Name : Anti-Arcing High Voltage Multilayer Ceramic Chip Capacitors

Part No. : FJ Series

Description : Size 1206~2225, C0G/X7R, 1000V~4000V

PREPARED BY	APPROVED BY

信昌電子陶瓷股份有限公司

PROSPERITY DIELECTRICS CO., LTD.

桃園市楊梅區高獅路 566-1 號 <http://www.pdc.com.tw>

Tel : 03-4753355 ext :

Fax : 03-4854959

Contactor : _____ **Mobile :** _____

Prosperity Dielectrics Co., Ltd.

No.566-1, Kaoshi Rd., Yangmei, Taoyuan 32668, Taiwan (R.O.C.)

Tel : 886-3-4753355

Fax : 886-3-4854959

SPECIFICATION

FOR

Product Name : Anti-Arcing High Voltage Multilayer Ceramic Chip Capacitors

Part No. : FJ Series

Description : Size 1206~2225, C0G/X7R, 1000V~4000V

SPEC. No. : FJ-000-001-11

DATE : 2023/07/26

DRAWN BY	CHECEKED BY	APPROVED BY
Jane Hsiao	Yvens Chou	Jason Lin

1. INTRODUCTION

PDC FJ Series green type capacitors are manufactured by using environmental friendly material without lead or cadmium. These capacitors feature series connection of multi-layer capacitor units in a MLCC to realize high voltage performance. This special design can distribute voltage gradients throughout the entire capacitor, so as to prevent short circuit failure. It is a safety design for LCD back-lighting inverter application.

2. FEATURES

- Special interior design offers high voltage rating in a given case size.
- High reliability and stability.
- Anti-Arcing.
- RoHS compliant.

3. APPLICATIONS

- DC to DC converter.
- High voltage coupling/DC blocking.
- Back-lighting inverters.
- LAN/WLAN interface.
- Modem.
- Power supplies.

4. HOW TO ORDER

FJ	31	X	102	K	202	E	C	G
PDC Family	Size	Dielectric	Capacitance	Tolerance	Rated Voltage	Packaging	Thickness	Control Code
Table 1	Table 2	Table 3	Table 4	Table 5	Table 6	Table 7	Table 8	Table 9

Table 1	PDC Family
Code	Description
FJ	Anti-Arcing high voltage application with $\geq 1\text{KVdc}$

Table 2		Size			
Code	Description	Code	Description	Code	Description
31	1206 (3216)	43	1812 (4532)	55	2220 (5750)
32	1210 (3225)	46	1825 (4563)	56	2225 (5763)
42	1808 (4520)	52	2211 (5728)		

Table 3		Dielectric Material Characteristics	
Code	Description	Code	Description
N	C0G	X	X7R

Table 4		Capacitance Rule Code	
Code	Description	Code	Description
R47	0.47pF	102	102=10x10 ² =1000pF
0R5	0.5pF	104	104=10x10 ⁴ =100nF
100	100=10x10 ⁰ =10pF	106	106=10x10 ⁶ =10μF

Table 5		Tolerance			
Code	Description	Code	Description	Code	Description
A	±0.05 pF	H	±3 %	Q	±0.03 pF
B	±0.10 pF	J	±5 %	Z	-20% ~ +80%
C	±0.25 pF	K	±10 %		
D	±0.50 pF	L	0% ~ +10%		
F	±1 %	M	±20 %		
G	±2 %	N	-5% ~ +10%		
I	-10% ~ 0%	P	±0.02 pF		

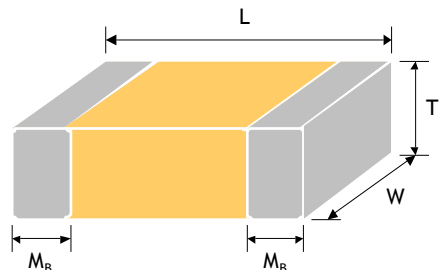
Table 6	Rated Voltage				
Code	Description	Code	Description	Code	Description
102	1000VDC	202	2000VDC	302	3000VDC
152	1500VDC	25	2500VDC	402	4000VDC

Table 7		Packaging Type	
Code	Description	Code	Description
B	Bulk	T	Tray package
E	Tape and 7" Reel, Embossed Tape	P	Tape and 7" Reel, Paper Tape
K	Tape and 10" Reel, Embossed Tape	D	Tape and 10" Reel, Paper Tape
L	Tape and 13" Reel, Embossed Tape	G	Tape and 13" Reel, Paper Tape

Table 8	Thickness Description				
Code	Description	Code	Description	Code	Description
A	0.60 ± 0.10 mm	I	1.25 ± 0.20 mm	Q	0.50 + 0.02/-0.05 mm
B	0.8+0.15/-0.10 mm	J	1.15 ± 0.15 mm	R	3.10 ± 0.30 mm
C	1.25 ± 0.10 mm	K	0.50 ± 0.20 mm	S	0.80 ± 0.07 mm
D	1.40 ± 0.15 mm	L	0.30 ± 0.03 mm	T	0.85 ± 0.10 mm
E	1.60 ± 0.20 mm	M	0.95 ± 0.10 mm	U	0.50 ± 0.10 mm
F	2.00 ± 0.20 mm	N	0.50 ± 0.05 mm	V	0.20 ± 0.02 mm
G	2.50 ± 0.30 mm	O	3.50 ± 0.20 mm	X	0.80 ± 0.10 mm
H	2.80 ± 0.30 mm	P	1.60+0.3/-0.10 mm	Z	0.25 ± 0.03 mm

Table 9	Special Control Code
Code	Description
G	RoHS Compliant
E	Soft Termination

5. EXTERNAL DIMENSIONS

Size Inch (mm)	L (mm)	W (mm)	Code / T (mm)	M _B (mm)	
1206(3216)	3.30±0.30	1.60±0.20	See No.4 Reference Table 8	0.60±0.20	
1210(3225)	3.30±0.40	2.50±0.30		0.75±0.35	
1808(4520)	4.50 +0.50/-0.30	2.00±0.25		0.75±0.35	
1812(4532)	4.50 +0.50/-0.30	3.20±0.40		0.75±0.35	
1825(4563)	4.50 +0.50/-0.30	6.30±0.40		0.75±0.35	
2211(5728)	5.70±0.40	2.80±0.30		0.85±0.35	
2220(5750)	5.70±0.40	5.00±0.40		0.85±0.35	
2225(5763)	5.70±0.40	6.30±0.40		0.85±0.35	
					Fig. 5.1 The outline of MLCC

6. GENERAL ELECTRICAL DATA

Dielectric	C0G		X7R							
Size	1206, 1210, 1808, 1812, 1825, 2220, 2225		1206, 1210, 1808, 1812, 1825, 2211, 2220, 2225							
Rated voltage (WVDC)	1000V, 1500V, 2000V, 3000V, 4000V		1000V, 1500V, 2000V, 2500V, 3000V, 4000V							
Capacitance range	1.5pF ~ 10nF		100pF ~ 220nF							
Capacitance tolerance	Reference to Table 5		Reference to Table 5							
Tan δ	<table><tr><td>Cap. Rang</td><td>Q Spec.</td></tr><tr><td>Cap.<30pF</td><td>Q≥400+20C</td></tr><tr><td>Cap.≥30pF</td><td>Q≥1000</td></tr></table>		Cap. Rang	Q Spec.	Cap.<30pF	Q≥400+20C	Cap.≥30pF	Q≥1000	≤2.5%	
	Cap. Rang	Q Spec.								
	Cap.<30pF	Q≥400+20C								
	Cap.≥30pF	Q≥1000								
Capacitance & Tan δ Test condition	Measured at the condition of 30~70% related humidity									
	For 25°C at ambient temperature		Preconditioning for Class II MLCC : Perform a heat treatment at 150±10°C for 1 hour, then leave in ambient condition for 24±2 hours before measurement							
	<table><tr><td>Cap. Rang</td><td>Test Condition</td></tr><tr><td>Cap.≤1000pF</td><td>1.0±0.2Vrms, 1.0MHZ±10%</td></tr><tr><td>Cap.>1000pF</td><td>1.0±0.2Vrms, 1.0KHz±10%</td></tr></table>		Cap. Rang	Test Condition	Cap.≤1000pF	1.0±0.2Vrms, 1.0MHZ±10%	Cap.>1000pF	1.0±0.2Vrms, 1.0KHz±10%	1.0±0.2Vrms, 1.0KHz±10%, at 25°C ambient temperatur	
	Cap. Rang	Test Condition								
	Cap.≤1000pF	1.0±0.2Vrms, 1.0MHZ±10%								
	Cap.>1000pF	1.0±0.2Vrms, 1.0KHz±10%								
Insulation resistance at Ur	≥100GΩ or RxC≥500Ω-F, whichever is smaller		≥10GΩ or RxC≥100Ω-F, whichever is smaller							
Operating temperature	-55°C to +125°C									
Capacitance characteristic	±30ppm/°C		±15%							
Termination	Cu or Ag/Ni/Sn (lead-free termination)									

7. CAPACITANCE RANGE

7-1. C0G

Dimension		1206				1210			
Cap.(pF)	Code	1000V	1500V	2000V	3000V	1000V	1500V	2000V	3000V
1.5	1R5	C	C	C					
1.8	1R8	C	C	C					
2.2	2R2	C	C	C					
2.7	2R7	C	C	C					
3.3	3R3	C	C	C					
3.9	3R9	C	C	C					
4.7	4R7	C	C	C					
5.0	5R0	C	C	C					
5.6	5R6	C	C	C					
6.8	6R8	C	C	C					
8.2	8R2	C	C	C					
10	100	C	C	C	E	G	G	G	G
12	120	C	C	C	E	G	G	G	G
15	150	C	C	C	E	G	G	G	G
18	180	C	C	C	E	G	G	G	G
22	220	C	C	C	E	G	G	G	G
27	270	C	C	C	E	G	G	G	G
33	330	C	C	C	E	G	G	G	G
39	390	C	C	C	E	G	G	G	G
47	470	C	C	C	E	G	G	G	G
56	560	C	C	C	E	G	G	G	G
68	680	C	C	C	E	G	G	G	G
82	820	C	C	C	E	G	G	G	G
100	101	C	C	C	E	G	G	G	G
120	121	C	E	E	E	G	G	G	G
150	151	C	E	E		G	G	G	G
180	181	E	E	E		G	G	G	G
220	221	E	E	E		G	G	G	G
270	271	E	E	E		G	G	G	G
330	331	E	E	E		G	G	G	
390	391	E	E	E		G	G	G	
470	471	E	E	E		G	G	G	
560	561	E				G	G	G	
680	681	E				G	G	G	
820	821	E				G	G	G	
1000	102	E				G	G	G	
1200	122					G	G	G	
1500	152					G	G	G	
1800	182					G	G	G	
2200	222					G			
2700	272					G			
3300	332					G			
3900	392					G			
4700	472					G			
5600	562					G			
8200	822					G			
10000	103					G			

7. CAPACITANCE RANGE(Con.)

7-1. C0G

Dimension		1808						1812					1825			
Cap.(pF)	Code	1000V	1500V	2000V	3000V	4000V	6000V	1000V	1500V	2000V	3000V	4000V	1000V	1500V	2000V	3000V
1.5	1R5															
1.8	1R8															
2.2	2R2	D	D	D	D	D										
2.7	2R7	D	D	D	D	D										
3.3	3R3	D	D	D	D	D	D									
3.9	3R9	D	D	D	D	D	D									
4.7	4R7	D	D	D	D	D	D									
5.0	5R0	D	D	D	D	D	D									
5.6	5R6	D	D	D	D	D	D									
6.8	6R8	D	D	D	D	D	D									
8.2	8R2	D	D	D	D	D	D									
10	100	D	D	D	D	D	D	F	F	F	F	F	F	F	F	F
12	120	D	D	D	D	D	D	F	F	F	F	F	F	F	F	F
15	150	D	D	D	D	D	D	F	F	F	F	F	F	F	F	F
18	180	D	D	D	D	D	D	F	F	F	F	F	F	F	F	F
22	220	D	D	D	D	F	D	F	F	F	F	F	F	F	F	F
27	270	D	D	D	D	F	D	F	F	F	F	F	F	F	F	F
33	330	D	D	D	D	F	D	F	F	F	F	F	F	F	F	F
39	390	D	D	D	D	F	E	F	F	F	F	F	F	F	F	F
47	470	D	D	D	D		E	F	F	F	F	F	F	F	F	F
56	560	D	D	D	D		E	F	F	F	F	F	F	F	F	F
68	680	D	D	D	D		F	F	F	F	F	F	F	F	F	F
82	820	D	D	D	D		F	F	F	F	F	F	F	F	F	F
100	101	D	D	D	F		F	F	F	F	F	F	F	F	F	F
120	121	D	D	D	F		F	F	F	F	F	G	F	F	F	F
150	151	D	F	F	F			F	F	F	F		F	F	F	F
180	181	D	F	F	F			F	F	F	F		F	F	F	F
220	221	D	F	F	F			F	F	F	F		F	F	F	F
270	271	F	F	F	F			F	F	F	F		F	F	F	F
330	331	F	F	F	F			F	F	F	F		F	F	F	F
390	391	F	F	F	F			F	F	F	F		F	F	F	F
470	471	F	F	F	F			F	F	F	F		F	F	F	F
560	561	F	F	F				F	F	F	F		F	F	F	F
680	681	F	F	F				F	F	F	F		F	F	F	G
820	821	F	F	F				F	F	F	G		F	F	F	G
1000	102	F	F	F				F	F	F	G		F	F	F	G
1200	122	F	F	F				F	F	F	R		F	F	F	
1500	152	F	F	F				F	F	F			F	G	G	
1800	182	F	F	F				F	F	F			F	G	G	
2200	222	F						F	F	F			F	G	G	
2700	272							F	G	G			F	G	G	
3300	332							F	G	G			F	G	G	
3900	392							G					G	G	G	
4700	472							G					G	G	G	
5600	562							G					G			
6800	682												G			
8200	822												G			
10000	103												G			

Prosperity Dielectrics Co., Ltd.

7. CAPACITANCE RANGE(Con.)

7-1. C0G

Dimension		2220					2225				
Cap.(pF)	Code	1000V	1500V	2000V	3000V	4000V	1000V	1500V	2000V	3000V	4000V
1.5	1R5										
1.8	1R8										
2.2	2R2										
2.7	2R7										
3.3	3R3										
3.9	3R9										
4.7	4R7										
5.0	5R0										
5.6	5R6										
6.8	6R8										
8.2	8R2										
10	100	F	F	F	F		F	F	F	F	F
12	120	F	F	F	F		F	F	F	F	F
15	150	F	F	F	F		F	F	F	F	F
18	180	F	F	F	F		F	F	F	F	F
22	220	F	F	F	F		F	F	F	F	F
27	270	F	F	F	F	F	F	F	F	F	F
33	330	F	F	F	F	F	F	F	F	F	F
39	390	F	F	F	F	F	F	F	F	F	F
47	470	F	F	F	F	F	F	F	F	F	F
56	560	F	F	F	F	F	F	F	F	F	F
68	680	F	F	F	F	F	F	F	F	F	F
82	820	F	F	F	F	F	F	F	F	F	F
100	101	F	F	F	F	F	F	F	F	F	F
120	121	F	F	F	F	F	F	F	F	F	
150	151	F	F	F	F	F	F	F	F	F	
180	181	F	F	F	F	F	F	F	F	F	
220	221	F	F	F	F	F	F	F	F	F	
270	271	F	F	F	F	G	F	F	F	F	
330	331	F	F	F	G	G	F	F	F	F	
390	391	F	F	F	G		F	F	F	F	
470	471	F	F	F	G		F	F	F	F	
560	561	F	F	F	G		F	F	F	F	
680	681	F	F	F	G		F	F	F	F	
820	821	F	F	F	G		F	G	G	G	
1000	102	F	F	F	G		F	G	G	G	
1200	122	G	G	G	G		F	G	G	G	
1500	152	G	G	G	G		F	G	G	G	
1800	182	G	G	G			F	G	G	G	
2200	222	G	G	G			F	G	G	G	
2700	272	G	G	G			F	G	G	G	
3300	332	G	G	G			F	G	G	G	
3900	392	G	G	G			F	G	G		
4700	472	G	G	G			F	G	G		
5600	562	G					G	G	G		
6800	682	G					G	G	G		
8200	822	G					G	G	G		
10000	103	G					G	G	G		
12000	123										

7. CAPACITANCE RANGE(Con.)

7-2. X7R

Dimension		1206				1210			1808				
Cap.(pF)	Code	1000V	1500V	2000V	2500V	1000V	1500V	2000V	1000V	1500V	2000V	3000V	4000V
100	101	C	C	C									
120	121	C	C	C									
150	151	C	C	C					D	D	D	D	F
180	181	C	C	C					D	D	D	D	F
220	221	C	C	C		G	G	G	D	D	D	D	F
270	271	C	C	C		G	G	G	D	D	D	D	F
330	331	C	C	C		G	G	G	D	D	D	F	F
390	391	C	C	C		G	G	G	D	D	D	F	F
470	471	C	C	C		G	G	G	D	D	D	F	F
560	561	C	C	C		G	G	G	D	D	D	F	F
680	681	C	C	C	C	G	G	G	D	D	D	F	F
820	821	C	C	C	C	G	G	G	D	D	D	F	F
1000	102	C	C	C	C	G	G	G	D	D	D	F	F
1200	122	C	E	E	E	G	G	G	D	F	F	F	
1500	152	C	E	E	E	G	G	G	D	F	F	F	
1800	182	C	E	E	E	G	G	G	D	F	F	F	
2200	222	C	E	E	E	G	G	G	D	F	F	F	
2700	272	C	E	E	E	G	G	G	D	F	F	F	
3300	332	C	E	E	E	G	G	G	D	F	F	F	
3900	392	C	E	E	E	G	G	G	D	F	F	F	
4700	472	C	E	E	E	G	G	G	D	F	F	F	
5600	562	C	E			G	G	G	F	F	F	F	
6800	682	C	E			G	G	G	F	F	F	F	
8200	822	C	E			G	G	G	F	F	F	F	
10000	103	C	E			G	G	G	F	F	F	F	
12000	123	E				G	G		F				
15000	153	E				G	G		F				
18000	183	E				G	G		F				
22000	223	E				G	G		F				
27000	273					G	G		F				
33000	333					G	G		F				
39000	393					G			F				
47000	473					G			F				
56000	563								F				
68000	683												

7. CAPACITANCE RANGE(Con.)

7-2. X7R

Dimension		1812					1825				
Cap.(pF)	Code	1000V	1500V	2000V	3000V	4000V	1000V	1500V	2000V	3000V	4000V
270	271	F	F	F	F	F					F
330	331	F	F	F	F	F					F
390	391	F	F	F	F	F					F
470	471	F	F	F	F	F					F
560	561	F	F	F	F	F					F
680	681	F	F	F	F	F					F
820	821	F	F	F	F	F					F
1000	102	F	F	F	F	F	F	F	F	F	F
1200	122	F	F	F	F	G	F	F	F	F	G
1500	152	F	F	F	F	G	F	F	F	F	G
1800	182	F	F	F	G	G	F	F	F	F	G
2200	222	F	F	F	G		F	F	F	F	
2700	272	F	F	F	G		F	F	F	F	
3300	332	F	F	F	G		F	F	F	F	
3900	392	F	F	F	G		F	F	F	F	
4700	472	F	F	F	G		F	F	F	F	
5600	562	F	G	G			F	F	F	G	
6800	682	F	G	G			F	F	F	G	
8200	822	F	G	G			F	F	F	G	
10000	103	F	G	G			F	F	F	G	
12000	123	F	G				F	G	G	H	
15000	153	F	G				F	G	G	H	
18000	183	G	G				F	G	G	H	
22000	223	G	G				F	G	G		
27000	273	G					F	H	H		
33000	333	G					F	H	H		
39000	393	G					F	H	H		
47000	473	G					F	H	H		
56000	563	G					F	H			
68000	683	G					F				
82000	823	G					G				
100000	104	G					G				

7. CAPACITANCE RANGE(Con.)

7-2. X7R

Dimension		2211		2220						2225					
Cap.(pF)	Code	3000V	4000V	1000V	1500V	2000V	3000V	4000V	5000V	1000V	1500V	2000V	3000V	4000V	5000V
270	271	F	F					F	F					F	F
330	331	F	F					F	F					F	F
390	391	F	F					F	F					F	F
470	471	F	F					F	F					F	F
560	561	F	F					F	F					F	F
680	681	F	F					F	F					F	F
820	821	F	F					F	F					F	F
1000	102	F	F	F	F	F	F	F	F	F	F	F	F	F	F
1200	122	G	G	F	F	F	F	G	F	F	F	F	F	G	F
1500	152	G	G	F	F	F	F	G	F	F	F	F	F	G	F
1800	182	G	G	F	F	F	F	G	F	F	F	F	F	G	F
2200	222	G		F	F	F	F	F	F	F	F	F	F		F
2700	272	G		F	F	F	F	F	F	F	F	F	F		F
3300	332	G		F	F	F	F	F	F	F	F	F	F		F
3900	392			F	F	F	F		F	F	F	F	F		F
4700	472			F	F	F	F	F/G	F	F	F	F	F		F/G
5600	562			F	F	F	F		F	F	F	F	G		
6800	682			F	F	F	G		F	F	F	F	G		
8200	822			F	G	G	G		F	F	F	G			
10000	103			F	G	G	G		F	F	F	G			
12000	123			F	G	G	H		F	G	G	G			
15000	153			F	G	G	H		F	G	G	G			
18000	183			F	H	H	H		F	G	G	H			
22000	223			F	H	H			F	G	G				
27000	273			F	H	H			F	G	G				
33000	333			F	H	H			F	G	G				
39000	393			F	H	H			F	G	H				
47000	473			F	H	H			F	G	H				
56000	563			F	H	H			F	G	H				
68000	683			G					F	G					
82000	823			G					F	G					
100000	104			G					G	G					
120000	124			G					H						
150000	154			H					H						
180000	184			H					H						
220000	224			H					H						
270000	274								F/G/H						
330000	334								F/G/H						



Prosperity Dielectrics Co., Ltd.

8. RELIABILITY TEST CONDITIONS AND REQUIREMENTS

No.	Item	Test Condition	Requirements															
1.	Visual and Dimensions	---	* No remarkable defect. * Dimensions to confirm to individual specification sheet.															
2.	Capacitance		* Shall not exceed the limits given in the detailed spec.															
3.	Q/D.F. (Dissipation Factor)	* Class I : C0G Cap.≤1000pF, 1.0±0.2Vrms, 1MHz±10%. Cap.>1000pF, 1.0±0.2Vrms, 1KHz±10%. * Class II : X7R 1.0±0.2Vrms, 1KHz±10%.																
			<table><tr><th>Dielectric</th><th>Rated Vol.(V)</th><th>Q/D.F.</th><th>Remark</th></tr><tr><td rowspan="2">Class I (C0G)</td><td rowspan="2">All</td><td>Q≥1000</td><td>Cap.≥30pF</td></tr><tr><td>Q≥400+20C</td><td>Cap.<30pF</td></tr><tr><td>Class II (X7R)</td><td>All</td><td>D.F.≤2.5%</td><td></td></tr></table>	Dielectric	Rated Vol.(V)	Q/D.F.	Remark	Class I (C0G)	All	Q≥1000	Cap.≥30pF	Q≥400+20C	Cap.<30pF	Class II (X7R)	All	D.F.≤2.5%		
			Dielectric	Rated Vol.(V)	Q/D.F.	Remark												
			Class I (C0G)	All	Q≥1000	Cap.≥30pF												
Q≥400+20C	Cap.<30pF																	
Class II (X7R)	All	D.F.≤2.5%																
4.	Temperature Coefficient	* With no electrical load. <table><tr><th>T.C.</th><th>Operating Temp.</th></tr><tr><td>C0G</td><td>-55~125°C at 25°C</td></tr><tr><td>X7R</td><td>-55~125°C at 25°C</td></tr></table>	T.C.	Operating Temp.	C0G	-55~125°C at 25°C	X7R	-55~125°C at 25°C	<table><tr><th>T.C.</th><th>Capacitance Change</th></tr><tr><td>C0G</td><td>Within ±30ppm/°C</td></tr><tr><td>X7R</td><td>Within ±15%</td></tr></table>	T.C.	Capacitance Change	C0G	Within ±30ppm/°C	X7R	Within ±15%			
			T.C.	Operating Temp.														
			C0G	-55~125°C at 25°C														
			X7R	-55~125°C at 25°C														
T.C.	Capacitance Change																	
C0G	Within ±30ppm/°C																	
X7R	Within ±15%																	
5.	Insulation Resistance	<table><tr><th>Rated Vol.(V)</th><th>Apply Voltage</th><th>Test Condition</th></tr><tr><td>>500</td><td>500Vdc</td><td>60 sec.</td></tr></table>	Rated Vol.(V)	Apply Voltage	Test Condition	>500	500Vdc	60 sec.	<table><tr><th>Dielectric</th><th>Requirements</th></tr><tr><td>Class I</td><td>≥100GΩ or RxC≥500Ω-F, whichever is smaller</td></tr><tr><td>Class II</td><td>≥10GΩ or RxC≥100Ω-F, whichever is smaller</td></tr></table>	Dielectric	Requirements	Class I	≥100GΩ or RxC≥500Ω-F, whichever is smaller	Class II	≥10GΩ or RxC≥100Ω-F, whichever is smaller			
		Rated Vol.(V)	Apply Voltage	Test Condition														
		>500	500Vdc	60 sec.														
Dielectric	Requirements																	
Class I	≥100GΩ or RxC≥500Ω-F, whichever is smaller																	
Class II	≥10GΩ or RxC≥100Ω-F, whichever is smaller																	
6.	Solderability	* Solder temperature : 235±5°C for (1206~1210). * Solder temperature : 245±5°C for (1808~2225). * Dipping time : 2±0.5 sec.	* 75% min. coverage of all metalized area.															
7.	Dielectric Strength	<table><tr><th>Rated Vol.(V)</th><th>Condition</th></tr><tr><td>630≤V≤3000V</td><td>1.2 times of UR</td></tr><tr><td>3000<V<5000V</td><td>1.1 times of UR</td></tr><tr><td>≥5000V</td><td>1.0 times of UR</td></tr></table> * Duration : 1 to 5 sec. * Voltage ramp up rate ≤500Vdc/sec. * Charge and discharge current less than 50mA. * Test in insulating fluid.	Rated Vol.(V)	Condition	630≤V≤3000V	1.2 times of UR	3000<V<5000V	1.1 times of UR	≥5000V	1.0 times of UR	* No evidence of damage or flashover during test.							
		Rated Vol.(V)	Condition															
		630≤V≤3000V	1.2 times of UR															
		3000<V<5000V	1.1 times of UR															
≥5000V	1.0 times of UR																	
8.	Resistance to Soldering Heat	* Solder temperature : 260±5°C. * Dipping time : 10±1 sec. * Preheating : 120 to 150°C for 1 minute before immerse the capacitor in a eutectic solder. * Before initial measurement (Class II only) : Perform 150 +0/-10°C for 1 hr and then set for 48±4 hrs at room temp. * Measurement to be made after keeping at room temp. for 24±2 hrs (Class I) or 48±4 hrs (Class II).	* No remarkable damage. * Cap. Change : C0G : Within ±2.5% or ±0.25pF, whichever is larger. X7R : Within ±7.5%. * Q/D.F. & I.R. : To meet the initial requirement. * 25% max. leaching on each edge.															
9.	Temperature Cycle	* Conduct the five cycles according to the temperatures and time. <table><tr><th>Step</th><th>Temp.(°C)</th><th>Time(min.)</th></tr><tr><td>1</td><td>Min. operating□temp. +0/-3</td><td>30±3</td></tr><tr><td>2</td><td>Room temp.</td><td>2~3</td></tr><tr><td>3</td><td>Max. operating temp. +3/-0</td><td>30±3</td></tr><tr><td>4</td><td>Room temp.</td><td>2~3</td></tr></table> * Before initial measurement (Class II only) : Perform 150 +0/-10°C for 1 hr and then set for 48±4 hrs at room temp. * Measurement to be made after keeping at room temp. for 24±2 hrs (Class I) or 48±4 hrs (Class II).	Step	Temp.(°C)	Time(min.)	1	Min. operating□temp. +0/-3	30±3	2	Room temp.	2~3	3	Max. operating temp. +3/-0	30±3	4	Room temp.	2~3	* No remarkable damage. * Cap. change : C0G : Within ±2.5% or ±0.25pF, whichever is larger. X7R : Within ±7.5%. * Q/D.F. : C0G : To meet the initial requirement. X7R : D.F.≤150% of initial requirement. * I.R. : To meet the initial requirement.
		Step	Temp.(°C)	Time(min.)														
		1	Min. operating□temp. +0/-3	30±3														
		2	Room temp.	2~3														
		3	Max. operating temp. +3/-0	30±3														
		4	Room temp.	2~3														

Prosperity Dielectrics Co., Ltd.

8. RELIABILITY TEST CONDITIONS AND REQUIREMENTS

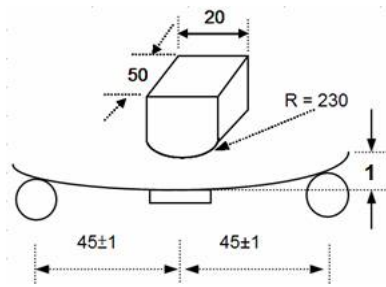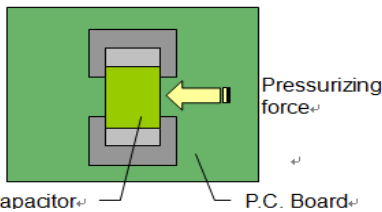No.	Item	Test Condition	Re uirements						
10.	Humidity (Damp Heat) Steady State	* Test temp. : 40±2°C. * Humidity : 90~95%RH. * Test time : 500 +24/-0 hrs. * Measurement to be made after keeping at room temp. for 24±2 hrs (Class I) or 48±4 hrs (Class II).	* No remarkable damage. * Cap. change : C0G : Within ±5.0% or ±0.5pF, whichever is larger. X7R : Within ±12.5%. * Q/D.F. : C0G : Cap.>30pF, Q≥350; 10pF≤Cap.≤30pF, Q≥275+2.5C; Cap.<10pF, Q≥200+10C. X7R : D.F.≤200% of initial requirement. * I.R. (Class I) : ≥10GΩ or RxC≥500Ω-F, whichever is smaller. * I.R. (Class II) : ≥1GΩ or RxC≥10Ω-F, whichever is smaller.						
11.	Humidity (Damp Heat) Load	* Reflow solder the capacitors on a P.C. Board before test. * Test temp. : 40±2°C. * Humidity : 90~95% RH. * Test time : 500 +24/-0hrs. * To apply voltage : 500Vdc. * Measurement to be made after keeping at room temp. for 24±2 hrs (Class I) or 48±4 hrs (Class II).	* No remarkable damage. * Cap. change : C0G : Within ±7.5% or ±0.75pF, whichever is larger. X7R : Within ±12.5%. * Q/D.F. : C0G : Cap.≥30pF, Q≥200; Cap.<30pF, Q≥100+10/3C. X7R : D.F.≤200% of initial requirement. * I.R. : ≥500MΩ or RxC≥25Ω-F, whichever is smaller.						
12.	High Temperature Load (Endurance)	* Test temp. : 125±3°C. * Apply voltage : 100% of rated voltage. * Test time : 1000 +24/-0 hrs. * Measurement to be made after keeping at room temp. for 24±2 hrs (Class I) or 48±4 hrs (Class II).	* No remarkable damage. * Cap. change : C0G : Within ±3.0% or ±0.3pF, whichever is larger. X7R : Within ±12.5%. * Q/D.F. : C0G : Cap.>30pF, Q≥350; 10pF≤Cap.≤30pF, Q≥275+2.5C; Cap.<10pF, Q≥200+10C. X7R : D.F.≤200% of initial requirement. * I.R. (Class I) : ≥10GΩ or RxC≥500Ω-F, whichever is smaller. * I.R. (Class II) : ≥1GΩ or RxC≥10Ω-F, whichever is smaller.						
13	Resistance to Flexure of Substrate	* The middle part of substrate shall be pressurized by means of the pressurizing rod at a rate of about 1mm per second until the deflection becomes 1mm.  Unit : mm	* No remarkable damage. <table><tr><th>Dielectric</th><th>Cap. Change</th></tr><tr><td>Class I (C0G)</td><td>Within ±3.0% or ±2.0pF, whichever is larger</td></tr><tr><td>Class II (X7R)</td><td>Within ±12.5%</td></tr></table> (This capacitance change means the change of capacitance under specified flexure of substrate from the capacitance measured before the test)	Dielectric	Cap. Change	Class I (C0G)	Within ±3.0% or ±2.0pF, whichever is larger	Class II (X7R)	Within ±12.5%
Dielectric	Cap. Change								
Class I (C0G)	Within ±3.0% or ±2.0pF, whichever is larger								
Class II (X7R)	Within ±12.5%								
14.	Adhesive Strength of Termination	* Capacitors mounted on a substrate. A force of 10N applied perpendicular to the place of substrate and parallel the line joining the center of terminations for 10±1 second.  Capacitor P.C. Board	* No remarkable damage or removal of the terminations.						

15. Vibration Resistance	* Vibration frequency : 10~55 Hz/min. * Total amplitude : 1.5mm. * Test time : 6 hrs (Two hrs each in three mutually perpendicular directions.)	* No remarkable damage. * Cap. change and Q/D.F. : To meet initial spec.
---------------------------------	---	---

Prosperity Dielectrics Co., Ltd.

9. PACKAGE DIMENSION AND QUANTITY

Size	Thickness (mm)	Paper tape		Plastic tape	
		7" reel	13" reel	7" reel	13" reel
0402(1005)	0.50±0.05	10k	50K	-	-
0603(1608)	0.80±0.07	4k	15k	-	-
	0.80 +0.15/-0.10	4k	15k	-	-
0805(2012)	0.60±0.10	4k	15k	-	-
	0.80±0.10	4k	15k	-	-
	1.25±0.10	-	-	3k	10k
	1.25±0.20	-	-	3k	-
1206(3216)	0.80±0.10	4k	15k	-	-
	0.95±0.10	-	-	3k	10k
	1.25±0.10	-	-	3k	10k
	1.60±0.20	-	-	2k	-
	1.60+0.30/-0.10	-	-	2k	-
1210(3225)	0.95±0.10	-	-	3k	10k
	1.25±0.10	-	-	3k	10k
	1.60±0.20	-	-	2k	-
	2.50±0.30	-	-	1k	-
1808(4520)	1.25±0.10	-	-	2k	-
	1.60±0.20	-	-	2k	-
	2.00±0.20	-	-	1k	-
1812(4532)	1.25±0.10	-	-	1k	-
	1.60±0.20	-	-	1k	-
	2.00±0.20	-	-	1k	-
	2.50±0.30	-	-	0.5k	-
1825(4563)	1.60±0.20	-	-	1k	-
	2.00±0.20	-	-	1k	-
	2.50±0.30	-	-	0.5k	-
	2.80±0.30	-	-	0.5k	-
2211(5728)	1.60±0.20	-	-	1k	-
	2.00±0.20	-	-	1k	-
	2.50±0.30	-	-	0.5k	-
	2.80±0.30	-	-	0.5k	-
2220(5750)	1.60±0.20	-	-	1k	-
	2.00±0.20	-	-	1k	-
	2.50±0.30	-	-	0.5k	-
	2.80±0.30	-	-	0.5k	-
	3.10±0.30	-	-	-	1k
2225(5763)	1.60±0.20	-	-	1k	-
	2.00±0.20	-	-	1k	-
	2.50±0.30	-	-	0.5k	-

2.80±0.30

-

-

0.5k

-

Unit : pcs

Prosperity Dielectrics Co., Ltd.

9. PACKAGE DIMENSION AND QUANTITY

9.1. EMBOSSED TAPE DIMENSIONS

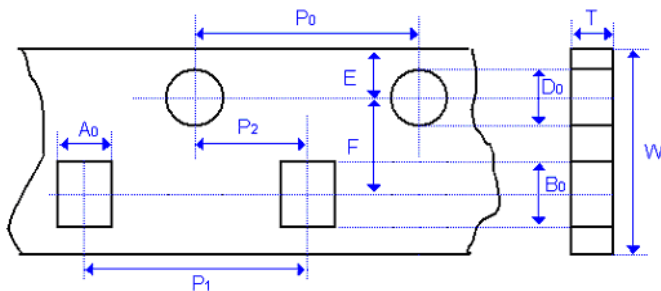


Fig. 9.1 The dimension of paper tape

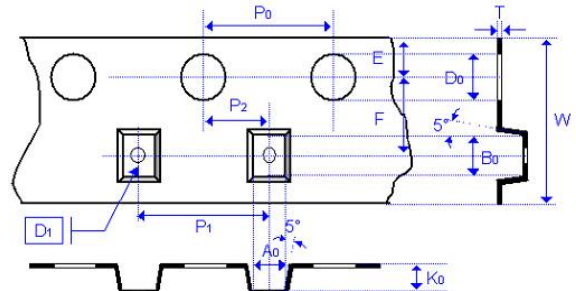


Fig. 9.2 The dimension of plastic tape

Size	0402		0603		0805	
Chip Thickness	0.50±0.05	0.50±0.10	0.80±0.07	0.80 +0.15/-0.1	0.80±0.10	1.25±0.10 1.25±0.20
A ₀	0.70±0.20	0.70±0.20	1.00 +0.05/-0.1	1.02 +0.05/-0.1	1.50±0.10	<1.65
B ₀	1.20±0.20	1.20±0.20	1.80±0.10	1.80±0.10	2.30±0.10	<2.40
T	≤0.80	≤0.80	0.95±0.05	0.97±0.05	0.95±0.05	0.23±0.05
K ₀	-	-	-	-	-	<2.50
W	8.00±0.10	8.00±0.10	8.00±0.10	8.00±0.10	8.00±0.10	8.00±0.10
P ₀	4.00±0.10	4.00±0.10	4.00±0.10	4.00±0.10	4.00±0.10	4.00±0.10
10xP ₀	40.00±0.10	40.00±0.10	40.00±0.20	40.00±0.20	40.00±0.20	40.00±0.20
P ₁	2.00±0.05	2.00±0.05	4.00±0.10	4.00±0.10	4.00±0.10	4.00±0.10
P ₂	2.00±0.05	2.00±0.05	2.00±0.05	2.00±0.05	2.00±0.05	2.00±0.05
D ₀	1.55±0.05	1.55±0.05	1.55±0.05	1.55±0.05	1.55±0.05	1.50 +0.10/-0
D ₁	-	-	-	-	-	1.00±0.10
E	1.75±0.05	1.75±0.05	1.75±0.05	1.75±0.05	1.75±0.05	1.75±0.10
F	3.50±0.05	3.50±0.05	3.50±0.05	3.50±0.05	3.50±0.05	3.50±0.05
Unit :	mm	mm	mm	mm	mm	mm

Size	1206			1210		1808	
Chip Thickness	0.80±0.10	0.95±0.10 1.25±0.10	1.25±0.10 1.60±0.20	1.25±0.10 1.60±0.20	2.50±0.30	1.25±0.10 1.60±0.20	2.00±0.20
A ₀	2.00±0.10	<2.00	<2.50	<2.50	<3.10	<2.50	<2.50
B ₀	3.50±0.10	<3.60	<5.30	<5.30	<4.00	<5.30	<5.30
T	0.95±0.05	0.23±0.05	0.25±0.05	0.25±0.05	0.23±0.05	0.25±0.05	0.25±0.05
K ₀	-	<2.50	<2.50	<2.50	<3.50	<2.50	<2.50
W	8.00±0.10	8.00±0.10	12.00±0.20	12.00±0.20	12.00±0.20	12.00±0.20	12.00±0.20
P ₀	4.00±0.10	4.00±0.10	4.00±0.10	4.00±0.10	4.00±0.10	4.00±0.10	4.00±0.10
10xP ₀	40.00±0.20	40.00±0.20	40.00±0.20	40.00±0.20	40.00±0.20	40.00±0.20	40.00±0.20
P ₁	4.00±0.10	4.00±0.10	4.00±0.10	4.00±0.10	4.00±0.10	4.00±0.10	4.00±0.10
P ₂	2.00±0.05	2.00±0.05	2.00±0.05	2.00±0.05	2.00±0.05	2.00±0.05	2.00±0.05
D ₀	1.55±0.05	1.50 +0.10/-0	1.50+0.10/-0	1.50+0.10/-0	1.50+0.10/-0	1.50+0.10/-0	1.50+0.10/-0
D ₁	-	1.00±0.10	1.50±0.10	1.50±0.10	1.00±0.10	1.50±0.10	1.50±0.10
E	1.75±0.10	1.75±0.10	1.75±0.10	1.75±0.10	1.75±0.10	1.75±0.10	1.75±0.10

F	3.50±0.05	3.50±0.05	5.50±0.05	5.50±0.05	3.50±0.05	5.50±0.05	5.50±0.05
Unit :	mm	mm	mm	mm	mm	mm	mm

Prosperity Dielectrics Co., Ltd.

9. PACKAGE DIMENSION AND QUANTITY

Size	1812		1825	
Chip Thickness	1.25±0.10 1.60±0.20 2.00±0.20	2.50±0.30 2.80±0.30	1.60±0.20 2.00±0.20	2.50±0.30 2.80±0.30
A₀	<3.90	<3.90	<6.80	<6.80
B₀	<5.30	<5.30	<5.30	<5.30
T	0.25±0.05	0.25±0.05	0.30±0.10	0.30±0.10
K₀	<2.50	<3.00	<2.50	<3.10
W	12.00±0.20	12.00±0.20	12.00±0.20	12.00±0.20
P₀	4.00±0.10	4.00±0.10	4.00±0.10	4.00±0.10
10xP₀	40.00±0.20	40.00±0.20	40.00±0.20	40.00±0.20
P₁	8.00±0.10	8.00±0.10	8.00±0.10	8.00±0.10
P₂	2.00±0.05	2.00±0.05	2.00±0.05	2.00±0.05
D₀	1.50 +0.10/-0	1.50 +0.10/-0	1.50 +0.10/-0	1.50 +0.10/-0
D₁	1.50±0.10	1.50±0.10	1.50±0.10	1.50±0.10
E	1.75±0.10	1.75±0.10	1.75±0.10	1.75±0.10
F	5.50±0.05	5.50±0.05	5.50±0.05	5.50±0.05
Unit :	mm	mm	mm	mm

Size	2220		2225		
Chip Thickness	1.40±0.15 1.60±0.20 2.00±0.20	2.50±0.30 2.80±0.30	3.10±0.30	1.60±0.20 2.00±0.20	2.50±0.30 2.80±0.30
A₀	<5.80	<6.80	<5.60	<6.80	<6.80
B₀	<6.50	<6.50	<6.50	<6.50	<6.50
T	0.30±0.10	0.30±0.10	0.30±0.10	0.30±0.10	0.30±0.10
K₀	<2.50	<3.10	<4.20	<2.50	<3.10
W	12.00±0.20	12.00±0.20	12.00±0.20	12.00±0.20	12.00±0.20
P₀	4.00±0.10	4.00±0.10	4.00±0.10	4.00±0.10	4.00±0.10
10xP₀	40.00±0.20	40.00±0.20	40.00±0.20	40.00±0.20	40.00±0.20
P₁	8.00±0.10	8.00±0.10	8.00±0.10	8.00±0.10	8.00±0.10
P₂	2.00±0.05	2.00±0.05	2.00±0.05	2.00±0.05	2.00±0.05
D₀	1.50 +0.10/-0	1.50 +0.10/-0	1.50 +0.10/-0	1.50 +0.10/-0	1.50 +0.10/-0
D₁	1.50±0.10	1.50±0.10	1.50±0.10	1.50±0.10	1.50±0.10
E	1.75±0.10	1.75±0.10	1.75±0.10	1.75±0.10	1.75±0.10
F	5.50±0.05	5.50±0.05	5.50±0.05	5.50±0.05	5.50±0.05
Unit :	mm	mm	mm	mm	mm

Prosperity Dielectrics Co., Ltd.

9. PACKAGE DIMENSION AND QUANTITY

9.3. REEL DIMENSIONS

Size	0201, 0402, 0603, 0805, 1206, 1210		1808, 1812, 1825,2220,2 225	2220
Reel size	7"	13"	7"	13"
C	13.0 +0.5/-0.2	13.0 +0.7/-0.3	13.0 +0.5/-0.2	13.5 ±0.5
W ₁	8.4 +1.5/-0	8.4 +2.0/-0	12.2 +2.0/-0	12.2 +2.0/-0
	14.4max	14.4max	shall accommodate tape width without interference	
A	178.0 ±0.10	330.0 ±1.0	178.0 ±0.10	330.0 ±1.0
N	60.0 +1.0/-0	100 ±1.0	60.0 +1.0/-0	100 ±1.0

The diagram illustrates the dimensions of a reel. It shows a large outer oval and a smaller inner oval. A vertical dimension line on the right side is labeled 'A', representing the total height. A horizontal dimension line across the middle is labeled 'N', representing the width. A vertical dimension line on the right side, below 'A', is labeled 'C', representing the height of the inner oval. A horizontal dimension line across the middle, below 'N', is labeled 'W', representing the width of the inner oval. A vertical dimension line on the right side, below 'C', is labeled 'W1', representing the width of the inner oval. The diagram also shows a small circle at the top center and a small circle at the bottom center.

Fig. 9.3 The dimension of reel

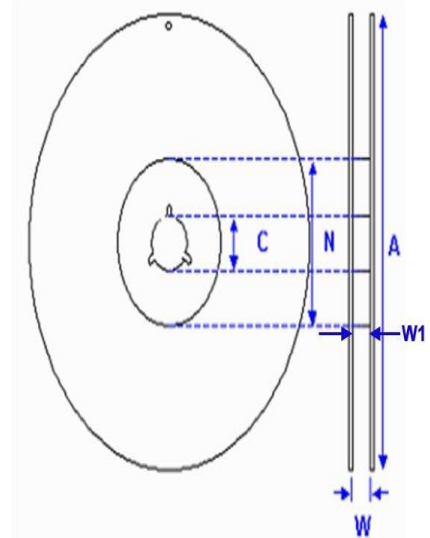


Fig. 9.3 The dimension of reel

Prosperity Dielectrics Co., Ltd.

10. APPLICATION NOTES

STORAGE

To prevent the damage of solderability of terminations, the following storage conditions are recommended :

Indoors under 5 ~ 40°C and 20% ~ 70% RH.

No harmful gases containing sulfuric acid, ammonia, hydrogen sulfide or chlorine.

Packaging should not be opened until the capacitors are required for use. If opened, the pack should be re-sealed as soon as is practicable. Taped product should be stored out of direct sunlight, which might promote deterioration in tape or adhesion performance. The product is recommended to be used within 12 months after shipment and checked the solderability before use.

HANDLING

Chip capacitors are dense, hard, brittle, and abrasive materials. They are liable to suffer mechanical damage, in the form of cracks or chips. Chip Capacitors should be handled with care to avoid contamination or damage. To use vacuum or plastic tweezers to pick up or plastic tweezers is recommended for manual placement. Tape and reeled packages are suitable for automatic pick and placement machine.


PREHEAT

In order to minimize the risk of thermal shock during soldering, a carefully controlled preheat is required. The rate of preheat should not exceed 3°C per second.

SOLDERING

Use mildly activated rosin fluxes do not use activated flux. The amount of solder in each solder joint should be controlled to prevent the damage of chip capacitors caused by the stress between solder, chips, and substrate.

a.) Hand soldering :

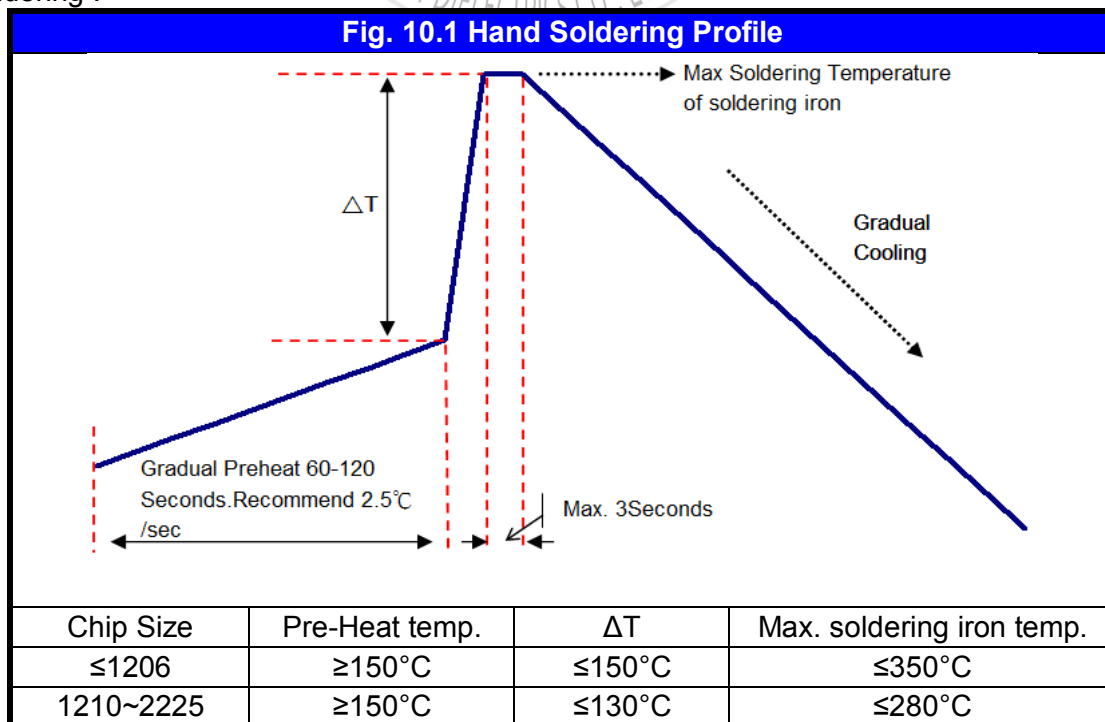

* Soldering iron tip diameter ≤ 1.0 mm and wattage max. 20W.

* The Capacitors shall be pre-heated and that the temperature gradient between the devices and the tip of the soldering iron.

Specification No. : FJ-000-000-11


~ 15 ~

- * The required amount of solder shall be melted on the soldering tip.
- * The tip of iron should not contact the ceramic body directly.
- * The Capacitors shall be cooled gradually at room temperature after soldering.
- * Forced air cooling is not allowed.




10. APPLICATION NOTES

b.) Reflow soldering :

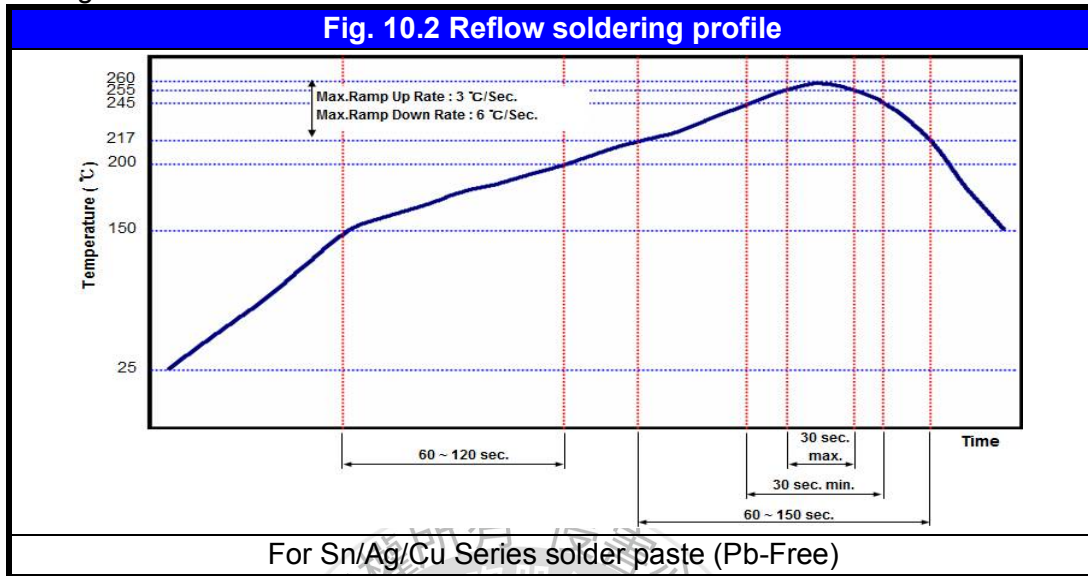

c.) Wave soldering : Do not apply wave soldering for FJ series products
 Soldering height :

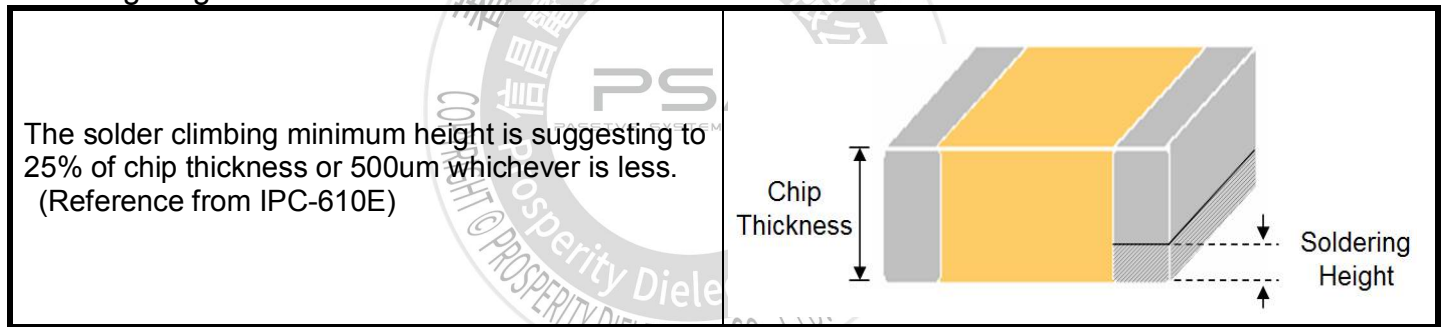

COOLING

After soldering, cool the chips and the substrate gradually to room temperature. Natural cooling in air is recommended to minimize stress in the solder joint.

CLEANING

All flux residues must be removed by using suitable electronic-grade vapor-cleaning solvents to eliminate contamination that could cause electrolytic surface corrosion. Good results can be obtained by using ultrasonic cleaning of the solvent. The choice of the proper system is depends upon many factors such as component mix, flux, and solder paste and assembly method. The ability of the cleaning system to remove flux residues and contamination from under the chips is very important.

Surface coating products are not suitable cleaning/washing by solvent